

# ELECTRONICS

**Australia**

**HIFI  
NEWS**

NOVEMBER, 1975  
AUST. 80c\* NZ \$1.00

COVER:  
COMPUTER FOR  
PROGRAMMING  
STUDY AT HOME

**TV EDUCATION  
VIA SATELLITE  
DATA SYSTEM  
FOR THE BLIND  
UNIT PROTECTS  
HIFI SPEAKERS  
DIGITAL ALARM  
CLOCK USES LSI  
EASY TO BUILD  
RF Q-METER**

**SPECIAL CATALOG  
SUPPLEMENT**



# From Sony research... a totally new turntable system



## Sony PS-4750

**Superb Fidelity from Today's Most Advanced Direct Drive**

Audio experts the world over have been waiting for it . . . Sony's incredible PS 4750, the ultimate turntable system.

State of the art takes on a new meaning with the PS 4750, probably the quietest turntable ever made.

In one elegant design Sony has reduced rumble, feedback wow and flutter to minute levels far beyond hearing and virtually beyond measurement. Wow and flutter for instance is an amazing 0.03% (wrms.) Signal to noise is better than 70 dB (DIN-B).

Sony achieved this in a number of ways:

First, all the belts, pulleys, idler wheels and other paraphernalia used in conventional turntables to make the turntable spin at the record's speed, instead of the motor's, have been eliminated.

The Sony PS 4750 has no need for these troublesome, noisy and fluttering parts, because its slow-revving D.C. motor is directly coupled to the platter.

Speed accuracy takes on new meaning with another Sony breakthrough, the "Magne-disc Servo Control."

Through a unique multi-gap head, this system automatically reads turntable speed through speed detective signals magnet-coated on to the turntable rim. Should there be any deviation induced by fluctuations in power supply, it immediately "instructs" the servo motor to make micro-accurate adjustments.

Another triumph of Sony research is the very material used to make the cabinet and turntable, B.M.C., developed specifically for audio use because its damping and resonance characteristics are 30 per cent better than the conventional aluminium diecast. B.M.C. is also virtually free of expansion or contraction, freeing the design of any problems arising from temperature changes.

Sony innovation didn't stop there. Look at the revolutionary rubber disc supports. These insulation mats are of a unique design which firmly grips the record, effectively insulating the disc from vibration when the turntable revolves. By preventing vibrations, these mats contribute to the stereo effect and significantly improve presence.


The precision tonearm is a universal type which accepts all quality shells and cartridges. Some of the Sony PS 4750's other advanced features are: stylus pressure adjustment (0-3 g), anti-skate compensator, viscous-damped (up and down) arm lifter, see-through stroboscope, independent pitch control (+ 4% on both 33 $\frac{1}{3}$  and 45) and large insulator legs for effective prevention of audio feedback.

If you've been waiting for the ultimate turntable, you need wait no more. The superb Sony direct-drive PS 4750 is here.

**SONY®**  
Research Makes the Difference

GAC.S.7532



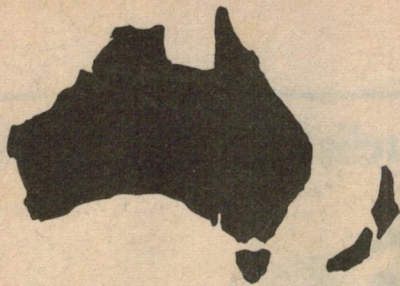


# ELECTRONICS Australia

Australia's largest-selling electronics & hi-fi magazine

VOLUME 37 No 8

## CONTENTS—NOVEMBER, 1975


### world of electronics and hi-fi

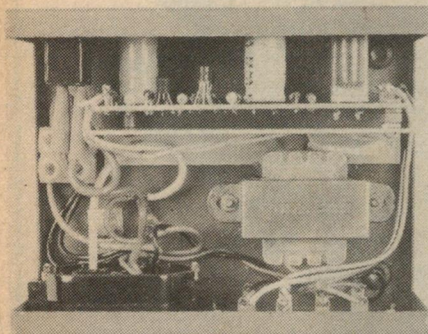

Developed in our laboratory, this loudspeaker protector will protect your expensive loudspeakers in the event of an amplifier malfunction. As well, it will eliminate switch-on "thumps". Details on page 34.

- 3 Editorial: Paperless news—but how soon?
- 9 Hi-Fi News:  
*A new approach to organ design—Quadraphonics—New Philips audio equipment—Quad record inventories—Pioneer CS-911 loudspeakers—Copyright situation—Portable plus transistor radios—Ortofon enters loudspeaker market*
- 12 Computerised modelling & laser techniques aid loudspeaker system
- 15 Nouveau, Neu, New! Cassettes and tapes from BASF
- 17 Review: Quad FM3 Tuner
- 21 Review: Yamaha YP-450 turntable
- 26 Educational TV via a satellite
- 31 New machine for the blind—for reading, writing and arithmetic
- 32 Computer system monitors racing car performance
- 62 Sidebands: as per a Fourier analyser

### projects and technical

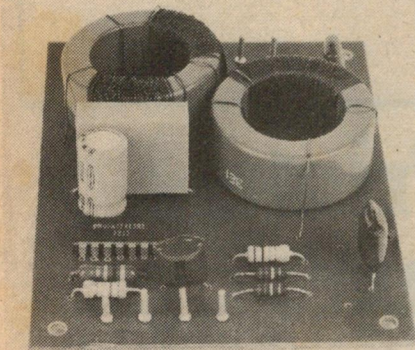

Designed for improving the signal to noise ratio from old movie sound tracks, this sharp-cut low-pass filter unit is compatible with the optical/magnetic preamp described last month. Constructional details on page 42.

- 34 Loudspeaker protector prevents speaker damage
- 38 Fluorescent readout LSI digital alarm clock
- 42 Sharp-cut low pass filter for 9.5 & 16mm projectors
- 46 Using the LM3900 quad op-amp IC
- 49 RF dummy load for testing transmitters
- 52 What's new in solid state: Very flexible timer, active filter
- 65 The serviceman: Customers—and their funny ideas
- 70 The measurement of "Q"—and an economy Q-meter
- 74 Modified wiper pulser for variable speed systems
- 77 Circuit and design ideas:  
*An unusual regulated power supply—Wow and flutter tests—Method of measuring amplifier distortion—Additional dividers for VNG reference*
- 80 Practical electronics demonstration: silicon controlled rectifiers
- 92 New products:  
*HMV 18-inch "Braddon" colour receiver—Antenna/rotator for colour TV, radio amateurs—Cordless iron from scope—Cordless PC drill—Mini slide switches—Balanced mixer—Mercury keyswitch—DIP connector—Semi-conductors—Low profile relay*

### On the cover


Our cover this month shows the Opus mini-computer which is being lent to students at Britain's Open University as part of a computer course. Developed for teaching purposes, the Opus offers many of the facilities found in commercial computers, including a store with 120 addressable locations, a 12-key keyboard, console switches and seven-segment displays. Cost is said to amount to only £13 per student. (Photograph courtesy British Information Service.)

### regular features

- 22 News highlights
- 61 Letters to the Editor
- 84 Record reviews—classical
- 86 Record reviews—devotional popular, jazz
- 90 Book reviews
- 99 The amateur bands
- 102 Shortwave scene
- 105 Information centre
- 109 Marketplace—classified
- 112 Index to advertisers
- 107 Notes and errata



**"A low-priced high-speed print-out system, reliable and adaptable"**

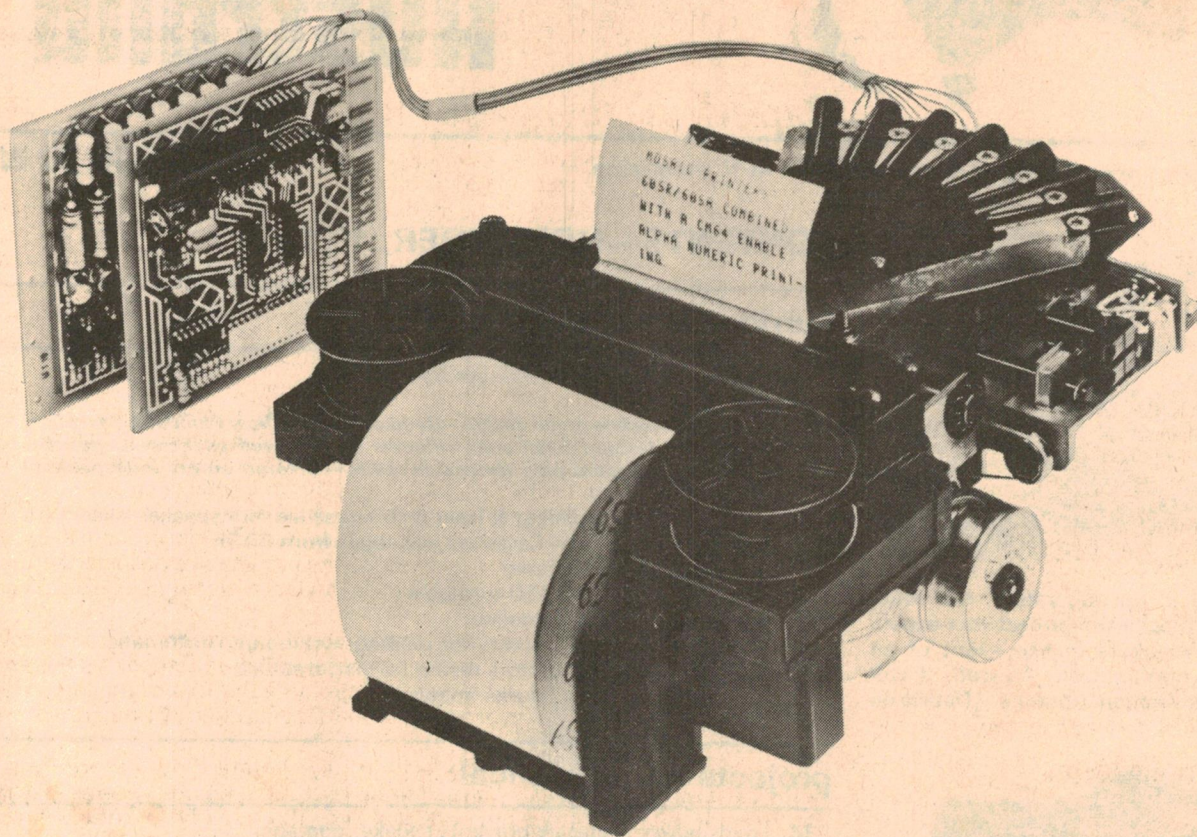

## The Philips Mosaic Printers speak your language.

Our 60 SA/SR mosaic printer is a low priced print-out system which surpasses many higher-priced competitors in performance and reliability. The system comprises a printer and drive/control module that prints a twenty-character line and returns the carriage within one second. Quietly!

Choose from two character modules — 20 character numerical; or 64 character alpha numerical with MOS memory control.

It's reliable and maintenance is negligible. The moving parts are the simplest ever — only seven needles and the transport mechanism. All the hard work is done by electronics. And we've kept it small and light.

And now two new mosaic printers:

1. The 115 SA/SR — DC version with 115mm wide paper.
2. The 250 SA/SR — A4 page printer which operates at 100 characters/SEC continuous, or up to 30 characters/SEC in character by character mode.

For further information contact ELCOMA Electronic Components & Materials, Box 50, Post Office, Lane Cove, New South Wales 2066. Telephone 42 1261 or 42 0361. Branches in all states.

# ELCOMA

# PHILIPS

153.102





# Editorial Viewpoint

## Paperless news—but how soon?

In a recent public statement Mr Talbot Duckmanton the general manager of the ABC disclosed that his organisation is interested in introducing an electronic newspaper system in Australia, along the lines of the Teletext/Ceefax/Oracle system being tested in Britain. Readers who saw our rather timely article on this system in the October issue were no doubt in a good position to evaluate the proposal.

Certainly the broad concept of disseminating news and other service information in this fashion has a lot of merit. Conventional newspapers are undeniably wasteful as a means of achieving this end, particularly in view of the fact that only a relatively small proportion of the information in any one copy is actually read.

Naturally enough, conservationists have expressed concern for the large amounts of paper used in newspaper production. Wastage of material resources like paper is certainly involved, although some recycling does take place. Ultimately a proportion of newspapers is pulped and used to make lower grade paper products such as wrapping paper, but probably a major proportion is effectively lost.

No less important in the long term is the physical energy expenditure and human labour required not only to print newspapers but also to distribute them to the dispersed end users. The electrical energy used by the printing presses and the fuel used by the distribution transport are very significant, the more so because unlike paper they cannot be recycled.

Any system which replaces this "hard copy" approach with one involving electromagnetic propagation of the required information directly to the end user is bound to be less wasteful, and therefore more desirable in the long term. However this is not to say that the transition from one to the other will be an easy one, to be embarked upon lightly.

For one thing, as our article last month pointed out, there is a technological/economic "viability hurdle" to be overcome before systems like Teletext can become practical. Until the cost of adding the required decoding circuitry to TV receivers can be brought down to a few tens of dollars, probably by developing a suitable LSI integrated circuit, the system will not be attractive; yet the integrated circuit makers are naturally unwilling to make the huge investment necessary to produce the required LSI device, without assurance of a large market.

Another important consideration is public acceptance. Despite the highly inefficient nature of traditional newspapers, and the fact that very few people really need or take advantage of their "hard copy" presentation, old habits die hard. We humans are used to having our news impressed upon our own private wad of paper. We find it comforting, and I suspect it will take quite a lot of public education before we will be prepared to part with our ink-stained security blankets.

In short, then, while the idea of Teletext is a good one, we don't suggest that you hold off buying a colour TV set until you can have one with Teletext decoding built in!

—Jamieson Rowe

### EDITOR-IN-CHIEF

Neville Williams  
M.I.R.E.E. (Aust.) (VK2XV)

### EDITOR

Jamieson Rowe  
B.A. (Sydney), B.Sc. (Technology, NSW)  
M.I.R.E.E. (Aust) (VK2ZLO/T)

### ASSISTANT EDITOR

Philip Watson  
A.M.I.R.E.E. (Aust.) (VK2ZPW)

### SCIENCE FEATURES

Greg Swain, B.Sc. (Hons, Sydney)

### PRODUCT REVIEWS

Leo Simpson

### TECHNICAL PROJECTS

David Edwards, B.E. (Hons, Tasmania)  
Ian Pogson (VK2AZN/T)

### GRAPHICS

Robert Flynn

### PRODUCTION

Ross Tester

### ADVERTISING MANAGER

Selwyn Sayers

### CIRCULATION MANAGER

Alan Parker

ON SALE THE FIRST MONDAY OF EACH MONTH.

Printed by Dalley-Middleton-Moore Pty Ltd, of Kent St, Sydney and Masterprint Pty Ltd of Dubbo, NSW, for Sungravure Pty Ltd, of Regent St, Sydney.

\*Recommended and maximum price only.

### Editorial Office

12th Floor, 235 — 243 Jones Street, Broadway, Sydney, 2007. Phone 2 0944. Postal Address: PO Box 163, Beaconsfield 2014.

### Advertising Offices

Sydney — 57-59 Regent St, Sydney 2008. Phone: 699 3622.  
Representative: Noel Fitzpatrick  
Melbourne — 425 St Kilda Road, Melbourne, 3004. Phone: 267 3800.  
Representative: Keith Watts

Adelaide — Charles F. Brown & Associates Ltd, 168 Melbourne St., North Adelaide 5006  
Representative: Tom Duffy 267 4377  
Perth — 454 Murray Street, Perth 6000.  
Representative: Jack Hansen 21 8217.

### Subscriptions

Subscription Dept, PO Box M204, Sydney Mail Exchange 2012.

### Circulation Office

21 Morley Ave, Rosebery, Sydney 2018. Phone 663 3911.

### Distribution

Distributed in NSW by Sungravure Pty Ltd, 57-59 Regent St, Sydney; in Victoria by Sungravure Pty Ltd, 392 Little Collins Street, Melbourne; in South Australia by Sungravure Pty Ltd, 101-105 Weymouth St, Adelaide; in

Western Australia by Sungravure Pty Ltd, 454 Murray Street, Perth; in Queensland by Gordon and Gotch (A'asia) Ltd; in Tasmania by Ingle Distributors, 22 Argyle St, Hobart; in New Zealand by Gordon and Gotch (NZ) Ltd, Adelaide Rd, Wellington.


### Copyright. All rights reserved

Devices or arrangements shown or described herein may embody patents. Information is furnished without responsibility for its use and without prejudice to patent rights.

All manuscripts, photographs and other material submitted to Electronics Australia for publication must be accompanied by a stamped, addressed envelope. Contributions are submitted at the sender's risk, and responsibility for loss cannot be accepted by Electronics Australia.




# What do ~~SCOPE~~ Superspeed Irons do best?

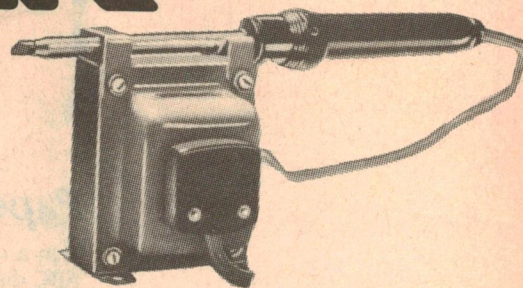

## SCOPE TRANSFORMER

This transformer is specially designed to provide a safe low voltage power source for Scope Superspeed irons (and Vibroscope etching tools). An earthed isolation shield prevents capacitive coupling with possible voltage leaks.

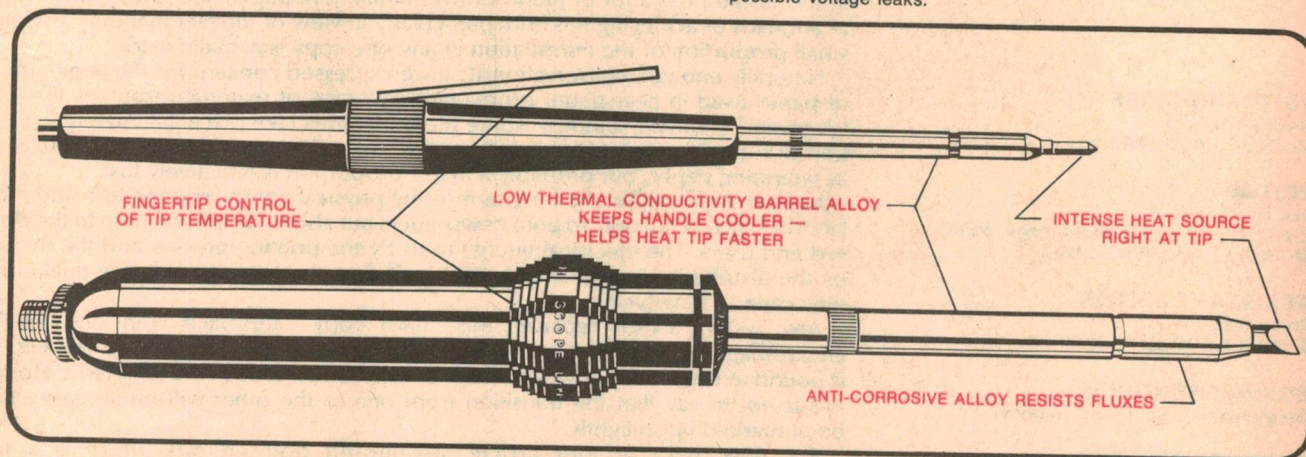

### 1. Provide intense heating power:

The patented heating concept located right behind the tip provides tremendous heat output to get the iron hot fast; then keeps the temperature under your control to complete every joint faster.

### 2. Let you control the power:

Should you encounter a heat sink which would rapidly drain away tip heat (e.g. thick metal or a need for plenty of molten solder) your finger switch provides another burst of heat to keep the copper tip at correct temperature. Normally only heavy irons have this capacity and take a long time to heat — and cool.

### 3. Put this heating power right at the tip:

A perfect iron has its heat source right at the surface of the tip — inefficient irons have their's up the barrel. The Superspeed range generate their heat on the copper tip itself, hence the intense concentration.

### 4. Lets the tip run cool when not actually soldering:

The tip stays tinned longer and lasts much longer because it switches off when you let go the handle. This feature plus a low heat conductivity stainless barrel keeps the handle cooler.

### 5. One iron replaces several:

With normal irons, you need several different sized irons to cope with various jobs and avoid the risk of dry or weak joints. Scope has designed an iron that does the work of any other iron from 10 watts to 150 watts.

## SUPERSPEED USER SELECTION DATA

	Superspeed	Mini Superspeed
Low heat conductivity barrel	Yes	Yes
Non-corrosive barrel	Yes	Yes
Weight (without leads)	100 grm	50 grm
Heating up time for 40/60 solder from cold	5 sec.	5 sec.
Heating up time for aluminium solder from cold (450°C)	14 sec.	12.5 sec.
Heating up time for hard silver solder from cold (630°C)	32 sec.	29 sec.
A conventional iron to do the same work would need to be—	up to 150W	up to 75W
Diameter of barrel	9.5 mm	6.4 mm
Choice of copper tip shapes	Yes	No
Cable lugs fitted	Yes	Yes
<b>User Preference Guide:</b>		
Electronic Service work	TV with vac. tubes	Solid State equipment
Electronic and Hi Fi hobbies	2nd pref.	1st pref.
Electricians and Linesmen	1st pref.	not recommended
Home Handyman and Farmers	1st pref.	not recommended
Model making — Mechanical Hobbies	1st pref.	2nd pref.

Scope products are available from all electrical wholesalers

## IRH COMPONENTS

DIVISION OF NATRONICS PTY. LIMITED  
The Crescent, Kingsgrove, N.S.W. 2208 Ph. 50-0111.

Please Post free illustrated SCOPE literature

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

CITY \_\_\_\_\_

POSTCODE \_\_\_\_\_





if you really care for tape...  
**BASF ACCESSORIES**  
 let you take care of it yourself

## THE BOX

The BASF hobby box — one for cassettes and one for reel-to-reel tape. Contains all the gear you need to give that professionally recorded finish to your recordings and to maintain your favourite tapes. Splicers, tweezers screw-driver, leaders, L clips, etc. BASF also have a full range of accessories you can buy separately: empty spools, library packs, leader tapes, splicing tapes, dispensers, switch foils, spool labels, tape clips, tape index cards, etc. All to let you present your recorded sound the way you want to. Split second editing, your own music programming, awkward pauses eliminated, slick professional sound!

## THE BOOK

Tape Questions, Tape Answers. Whether you've just built your own Hi-Fi system, or you're thinking about your first recorder, this is a mine of information. Selecting the right tape, or cassette, sound mixing, microphones, editing and splicing, recorder maintenance, adding sound to film, and more. 120 pages with 100 illustrations and diagrams.

## THE SERVICE

BASF have the products, and we have the service, too. Ask anything you need to know about tape recording and we'll give you the answer. Remember the performance and technical specifications of the BASF range are fully guaranteed — if you have a problem with a cassette or tape we'll replace it — FREE!



**Maurice  
Chapman**  
 & COMPANY PTY. LTD.


Sole Australian Distributors:  
**MAURICE CHAPMAN & COMPANY PTY. LTD.**  
 Sydney: 276 Castlereagh Street, Sydney 2000.  
 Melbourne: 146-150 Burwood Rd., Hawthorn, Vic. 3122.  
 Brisbane: 123 Abbotsford Road, Mayne, Qld. 4006.

Agents: — Newcastle: W. L. Redman & Co. Pty. Ltd.;  
 Canberra: Sonney Cohen & Sons; State Distributors: —  
 Adelaide: Neil Muller Pty. Ltd.; Perth: M. J. Bateman Pty. Ltd.;  
 Launceston: P. & M. Distributors; Darwin: Pflitzners Music House.

® BASF Aktiengesellschaft, 6700 Ludwigshafen/Rhein, Federal Republic of Germany.

BA4711



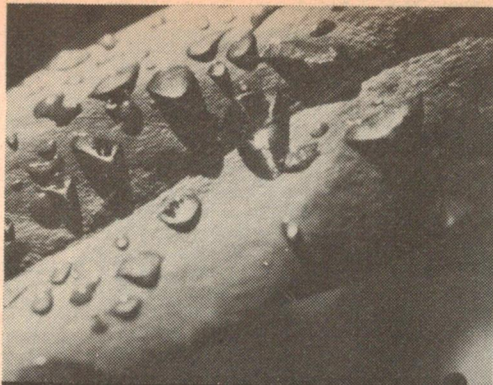

**The new Apan BRA 121 Series 4000.  
Integrated hydraulic cue device. Semi-automatic.  
4 channel ready. Servo assisted.**

The top of the range semi-automatic. Strobe edge aluminium turntable. Electronically controlled A.C. servo assisted motor rear mounted. An incredible wow and flutter of 0.08%. Superior Jelco MC 14D cartridge 4 channel ready. For full 4 channel CD 4 sound, change the stylus to Jelco ND-IX or slip in the complete Jelco 4C-IX cartridge.

You can't go past the Apan BRA 121 Series 4000.  
Ask your dealer to show you.



**Ralmar Agencies,**  
71-73 Chandos Street,  
St. Leonards.  
N.S.W. 2065  
Telephone 439-4352.

Agents and distributors  
throughout Australia.

Also available  
BMU 121 Manual  
BRU 121 Semi-Automatic  
BFU 121 Fully Automatic

**apan**





# Listening to music in the home

When we listen we become engrossed in the music and, with good equipment, we can often obtain the same satisfaction that we would enjoy in the concert hall. Of course, there are differences between the real and the reproduced. Many of these we recognise as such; we come to terms with them and they do not intrude.

More serious perhaps are the distortions which we do not consciously notice but which are nevertheless continuously producing a contradiction between the

actual and the imagined. They produce listening fatigue, a condition detrimental to the true objective. These distortions have little to do with the popular conceptions of HI-FI or LO-FI sound; on the other hand they have much to do with good or bad engineering.


For free literature, contact the sole Australian agent, British Merchandising Pty. Ltd., 49-51 York Street, Sydney. Telephone 29-1571.

## QUAD

**Products of The Acoustical Manufacturing Co. Ltd.**  
for the closest approach to the original sound

QUAD is a Registered Trade Mark





# Hi Fi News

## A new approach to organ design

Integrated injection logic (I<sup>2</sup>L) and emitter coupled logic (ECL) are currently making headlines in the technical press but, already, they have found their way into prototype electronic organ circuitry. A new device from Philips, Eindhoven, offers a potential alternative to the octave generator ICs which are, themselves, relatively new.

by NEVILLE WILLIAMS

Broadly speaking, the designer of an electronic organ or other such instrument has three main design options.

The first is to use separate oscillators to provide the various pitches, the advantage of the method being that separate oscillators can provide some randomness of pitch and phase, equivalent to that in a pipe instrument.

Offsetting this advantage is the fact that periodic overall tuning is necessary and the pitch can only be modified by complete re-tuning. Nowadays, this approach is mainly the preserve of large, elaborate instruments envisaged as a direct substitute for their pipe counterparts—either classical or popular.


A second major approach—and a relatively new one—is to acquire and store information about waveforms in a digital form, typically involving read-only memories (ROMs) and punched cards. When a player operates the quite ordinary registration tabs and playing keys, internal computer style technology invokes and assembles the required digital information. It is then transformed into an analog signal and applied to conventional amplifiers and loudspeakers.

This approach makes available to the designer a whole array of sophisticated digital technology, which would otherwise have no place in organ design. However, it has important implications in terms of signal component frequency and phase, because data repetition rates must relate ultimately to the basic "clock" frequency. It obviates any problems with tuning or tuning drift, facilitates increments in overall pitch but also eliminates any natural randomness between the tone sources.


The third major approach—and far and away the most popular—is to provide the

twelve basic semitones for an octave at or above the top frequency range of the instrument. Frequency dividers are then used to generate the basic tones for progressively lower octaves.

Originally, ordinary tuneable L/C oscillators were used to provide the top reference octave, adding up to an instrument which required limited tuning, allowed for some randomness between intervals within the octave, but no randomness between the same note

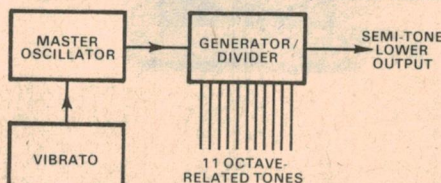

Block diagram of the new Philips prototype organ tone generator. Driven by an 8MHz (approx) oscillator, the first chip provides all "C" tones required by the organ, if necessary frequency modulated for vibrato. It also provides an 8MHz drive for the next chip, providing all the "B" tones.

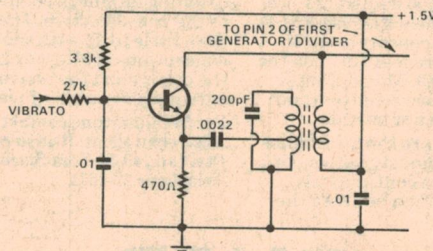

The basic 8MHz (approx) oscillator may be crystal locked or may be an L/C circuit, as desired. The circuit suggested by Philips has adequate stability, remembering that any slight drift affects the pitch of the organ as a whole, not the critical intra-octave intervals.

in different octaves. The basic pitch could only be changed by re-tuning the twelve master oscillators.

More recently, the twelve master oscillators have tended to give place to a single master oscillator, usually at about 2MHz, followed by logic circuitry dividing down to a reference super-octave of tones closely approximating the tempered scale. As before, a chain of flip-flops divides down each note of this reference octave to provide all the basic frequencies required by the keyboards. The high frequency master oscillator can be variable tuned to provide desired changes in pitch, or it can be crystal locked, or switched in predetermined increments.

Whatever the detail, however, all tones in a master-oscillator-divider type organ are frequency and phase-interlocked and designers have to resort to phase modulation of one type or another to simulate the randomness of an acoustic instrument.

For the many manufacturers of this type of instrument, some kind of an ultimate seemed to have been reached, not long ago, with the release of integrated circuits which contained all the logic circuitry necessary to produce a reference super-octave from one 2MHz crystal oscillator or its equivalent. Other ICs provided the necessary divider chains to supply the manuals and pedal clavier. Circuitry which had previously involved large arrays of valves or, later, discrete transistors, was therefore concentrated in a few ICs on a relatively modest PC board.

Now, it seems, Philips are working on an approach for a master-oscillator-divider organ which will offer still further economies. Instead of the complex and relatively costly IC to generate the super-octave, they have come up with one using I<sup>2</sup>L and ECL technology which accepts the signal from a master oscillator at about 8MHz to produce twelve outputs: eleven octave-related tones necessary to supply a particular note in all manuals, together with one output which is lower than the original 8MHz drive signal by the twelfth root of 2, or one semitone.

Typically, one of the new 16-pin ICs might be fed from a master oscillator at a frequency of 8.572846MHz. Dividing by 2<sup>10</sup>, it would produce 16744Hz; by 2<sup>10</sup> it would produce 8372Hz and so on for all the "C" notes down to 2<sup>19</sup> and an output at 8.091Hz. In addition to these audio frequencies, the IC would also produce an output 8.0917202MHz, which is suitable for driving another exactly similar IC; this would produce all the "B" notes and, in turn, drive for the "B-flat" IC.

While, on the surface, it might appear that the new approach merely distributes the same functions differently in a similar number of IC packages, the early implication seems to be that an economy will result from using twelve of the new



(and identical) ICs, which require no external components other than the master oscillator and a simple series resistor between the outputs and the keying circuitry.

A further advantage is that, by dividing down from 8MHz rather than the more usual 2MHz, a closer approach can be achieved to a mathematically precise tempered scale. The maximum deviation occurring in any octave is 49 parts per million or .0049%.

For straightforward instruments, the bank of ICs can be fed from a relatively simple L/C oscillator, which can be rendered intrinsically very stable by careful design, while nevertheless allowing its frequency to be modulated to provide vibrato effects. Since all pitches are derived from the one master oscillator, any deviations, whether deliberate or incidental, affect the overall pitch of the instrument but not its internal frequency relationships.

Typically, the entire tone generating system can be assembled on one PC board measuring 4 x 30cm.

For more elaborate instruments such an economy of space and circuitry makes it relatively easy to incorporate additional generator systems, depending on requirements, these can be used to obtain vibrato and non-vibrato options, "celeste" or off-tune "chorus" effects, glide tone effects and so on. Again, with an additional divider circuitry available, the whole system can be stepped towards or away from the master oscillator, effecting transposition of all the keyboards a semitone at a time.

**QUADRAPHONICS:** While there are plenty of "knockers", Edward Tatnall Canby, writing in "Audio" magazine, seems more keen than ever about quadrasonic systems. His renewed enthusiasm flows from the latest generation of quadrasonic equipment which he has been closetted with—CD-4, SQ and QS.

While he is more enthusiastic than specific, the message that comes through is that the new generation of equipment really works, with controls, circuit techniques and automatic this-and-thats which wrap up what might have been seen before as loose ends.

Canby isn't inclined to argue too much about the particular system; each has its plusses which show up most strongly with certain types of program material but, for Canby, any kind of quadrasonic is likely to be preferable to plain two-channel stereo.

He admits that the new hardware is gimmicky and costly but, for him, the important thing is that it seems to have solved the outstanding technical problems. From here, it should be a downhill run to wider public acceptance, as the hardware is simplified and cheapened, while still doing the same job!

JVC, meanwhile, is optimistic about 4-channel but certainly doesn't see the future as a "downhill run".

## NEW PHILIPS AUDIO EQUIPMENT




Backed by the Company's largest-ever promotion for their audio products, Philips have recently launched a variety of new items of special interest to Australian hifi enthusiasts. Included is the motional feedback loudspeaker and the electronic turntable mentioned in July.

Pictured above is the complete domestic system 850, which is expected to market at a recommended retail price of \$440. It includes an AM/FM radio, with capital city AM stations marked on the dial. The amplifier has all the usual controls and facilities for connection to external tape equipment.

For those requiring a separate

tuner/amplifier, Philips are offering the RH750 pictured below. With a power output of 13.5W per channel into 4 ohms, the RH750 has facilities for phono, tape and microphone input, and all the normal controls expected in a hifi installation. Both tuners—AM and FM—have built-in aerial provision, adequate for all but poor locations. A tuning meter at the top left corner of the panel serves both reception modes. Rated signal/noise ratio for the FM tuner is 65dB and stereo separation 34dB. For the AM tuner, the rated signal/noise ratio is 45dB. Recommended retail price for the RH750 AM/FM Tuner/amplifier is \$239.00.

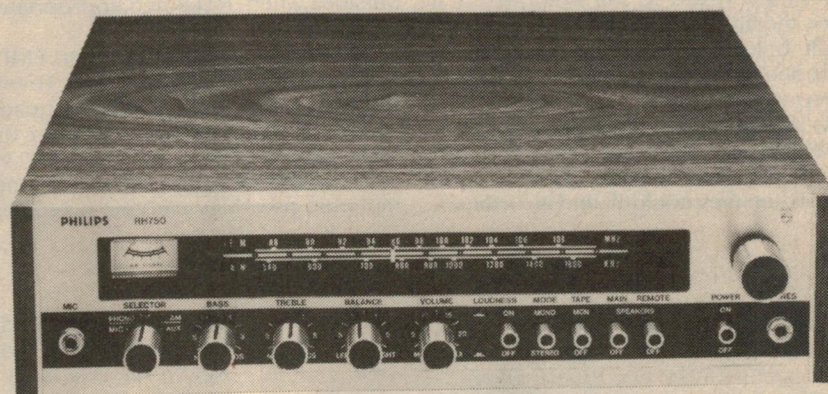

Conforming to the currently popular "military look" Philips model RR260 (pictured at right) offers AM and FM radio, combined with a full cassette recorder with built-in condenser microphone.

There is provision for external plug-in microphone and external speaker, headphones and remote control. Recommended retail price is \$99.00.





At the most recent US hifi show, a JVC survey indicated that over 50% of prospective customers were interested in 4-channel sound but lost interest when they came up against dealer confusion apathy.

Accordingly, JVC America is currently setting up so-called "Quadracenters" throughout the USA intended to give customers the opportunity to hear the whole range of their 4-channel equipment under properly controlled conditions: receivers, amplifiers, demodulators, tape decks, loudspeakers, etc.

The Quadracenters will be staffed by salesmen who have been through a course covering 4-channel concepts and installations. They are backed by a special "Hot-Line" service, where customers have the opportunity of making toll-free calls to the JVC National Quadracenter aimed at helping them with any difficulties related to 4-channel sound.

**QUAD RECORD INVENTORIES:** Record company attitudes are continuing to shift in the matter of the release and stocking of quadraphonic versions of new releases.

As noted last month RCA have moved away from their original plan to rely on the CD-4 pressings, where issued, to cover the complete market: quadraphonic, 2-channel stereo and mono.

Superficially, this is possible because the extra information in the supersonic FM channels is ignored by non-CD4 equipment. All signals in the main channels simply revert to the front arc, as it were moving straight forward, the end result being a close approximation of what one would expect from a 2-channel stereo version.

As indicated RCA ran into a credibility problem: customers didn't seem to get the message that the discs were compatible; when they couldn't find an ordinary

Employing no less than six separate drivers, the Pioneer CS-911 loud-speaker system (pictured) is aimed at the top end of the hifi market. The bass end is handled by a 15-inch (38cm) woofer, while two 10cm roll-surround units cover the mid-range.

For the top of the range, three more drivers are used: one 77mm cone tweeter and two 57mm cone "super tweeters".

Rated frequency range is 30Hz to 22kHz, while the power handling capacity is given as 150 watts. Impedance is 8 ohms. 3-position switches on the front panel, behind the removable grille, permit the middle and treble balance to be varied according to user preference.

The system features a new carbon fibre cone material, developed jointly by Pioneer and Toray Industries of Japan. Basically, the new material is produced by heat processing organic fibres to

produce carbon fibres, then surface processing with polyvinyl alcohol to ensure good integral adhesion. Pioneer say that the carbon fibre cones offer a high modulus of elasticity, combined with mechanical strength, low density and weight, and high dimensional stability.

For further information: Pioneer Electronics Australia Pty Ltd, 178-184 Boundary Rd, Braeside, Vic 3195. Tel 90-9011.



"stereo" version, they settled for something else. And, of course, there were those who knew the technical story but had reservations about the durability of pressings carrying a supersonic modulation which, for them, was redundant. As a result, RCA have amended their "CD-4 only" policy and have issued "stereo" versions where it seemed appropriate to do so.


Now comes the news that EMI in Britain have made just the reverse decision with a number of their quadraphonic classical releases. Rather than issue separate "SQ" and "stereo" versions, EMI have produced stereo/quadraphonic pressings carrying a rectangle

symbol. It parallels the position noted for France, where SQ pressings are often sold with ordinary stereo labelling.

Unlike the CD-4 discs, the quadraphonic information lies totally within the audio band and will be reproduced in the stereo version, however appropriate or peculiar the various phase relationships. The producers have to study each recording on its merits and arrange the mix-down so that the end result is acceptable in all playing models. From reviews published overseas, the exercise has proved to be entirely successful.

**COPYRIGHT SITUATION:** Prompted, fairly obviously, by recent imports and seizures of "pirate" cassettes in Australia, the ANZ Musical Copyright Agency has issued a letter summarising the official copyright situation covering records and cassettes of musical works. Over the signature of Manager A. J. Turner, the letter reads as follows:

It has become apparent that not all persons engaged in the business of importing, distributing or retailing records or pre-recorded tapes obtained from overseas suppliers are aware of their responsibilities under the Copyright Act 1968. The following information has therefore been made available on behalf of this Agency's principals to publicise those responsibilities and the facilities provided by this Agency to assist all such persons in meeting their responsibilities. (1) ANZ Musical Copyright Agency is the licensing division of AMPAL and represents the majority of Music

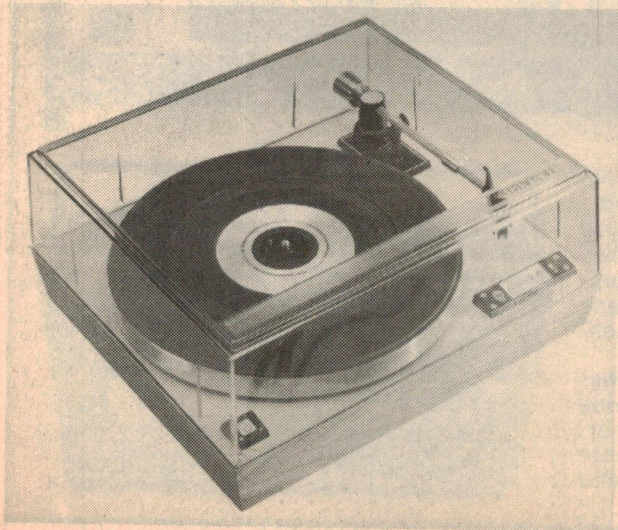

What is the best kind of bearing for a playing deck? The one likely to produce the least rumble? The answer, perhaps, is: no bearing at all, in the mechanical sense; instead, the turntable is supported by the repulsion effect of a magnetic field. A British "Gale" turntable of this type was exhibited recently at the Sydney Hifi show, while a new Stanton design at left uses magnets both to support and to drive the turntable.



Publishing Companies who own or control the copyrights for Australia in most music in current use. A major purpose of the Agency is to provide for the music industries a convenient central office for the licensing of the importation and sale of recordings of musical works and for the collection of royalties in respect thereof.

- (2) It is an infringement of copyright for any party to import into Australia for re-sale any records or cassettes containing copyright musical works without the prior permission of those who control the relevant copyright for Australia or their representatives. This permission cannot be given validly by an overseas exporter who only controls copyright in the country of manufacture or export. (Copyright Act, section 37.)
- (3) Any wholesaler or retailer who sells imported records of music which have not been properly licensed for importation by the Australian copyright owners can also be liable for infringement of copyright. (Copyright Act, section 38.)
- (4) Applications for permission to import records and cassettes containing copyright music should be addressed to ANZ Musical Copyright Agency, P.O. Box Q123, Queen Victoria Building, Sydney, N.S.W. 2000. The detailed information to be included in such applications is available upon written request to the Agency.
- (5) Wholesalers and retailers, in order to avoid risk of liability, before purchasing records made in any overseas country, should enquire from this Agency as to whether such records have been imported with proper copyright clearance.
- (6) This Agency is available to provide information and assistance to any importer, wholesaler or retailer in relation to the copyright in musical works and enquiries will be welcomed.

**PORTABLE PLUS:** Portable transistor radios have been decked out with AM, FM and shortwave bands, cassette tape facilities, a wide variety of styling features and just about everything else one could think of. But Matsushita Electric's latest National RF-1300 has an inclusion that certainly would not have occurred to many up to this point in time: an electronic rhythm generator!

Borrowing the technology developed for electronic organs, the unit offers a choice of eight different rhythms—twist, waltz, ballade, etc.—produced by synthesised cymbals, snare drum, bass drum and high hat.

The model has provision for interconnection to microphone, electric guitar, tape recorder, record player, or another radio, and has provision to adjust the tempo to the precise speed required. Presumably the user can superimpose a locally generated beat on external program material or just listen to the beat for as long as he/she likes.

Nor are they stuck with a few milliwatts of power. The RF-1300 supplies 5 watts to a 16cm twin-cone speaker. It can be operated from AC mains, car battery supply or ten D-size torch cells.

**NOW WE SCAN SPEAK!** It was announced some time ago that Ortofon, well known for their phono cartridges and playing arms were planning to enter the loudspeaker business. The basis for the expansion has now been revealed.

After lengthy negotiations, Ortofon Manufacturing A/S has taken over Scan Speak, the Danish loudspeaker manufacturer. Scan Speak has been the supplier to many local Danish companies but has also marketed the Scansonic speaker systems on an international basis.

Ortofon's Managing Director, Erik Rohmann, has assumed control over the total company, now employing 400 people, while Bent Thomsen is Sales Manager with responsibility for the Scansonic product program.

# Fantastic double offer!

## PACKAGE No 1

(ELECTRONIC)

### L.E.D QUARTZ DIGITAL WATCH

Displaying in large bright numbers HOURS — MINUTES — SECONDS. Finished in stainless steel case and matching bracelet. 12 months guarantee.



### CALFAX CALCULATOR

8 Digits, 5 Functions, % Key, Zero Suppress, Auto and Manual Constant.



**Both for a crazy**

**\$99**

## PACKAGE No 2

(ELECTRONIC)


### L.E.D QUARTZ DIGITAL WATCH

Displaying in large bright numbers HOURS — MINUTES — SECONDS — DAY — DATE. Finished in 5 Micron Rolled Gold with matching bracelet. 12 months guarantee.



### CALFAX CALCULATOR

9 Digits, 5 Functions, Memory, % Key, Zero Suppress, Auto Constant, Entry and Error overflow sign, Auto battery saver cut-off.



**Both for a crazy**

**\$169**

## DIRECT FROM SOLE IMPORTER

Micro-Electronics

Shop 17, National Mutual Arcade, Perth, W.A. 6000. Tel.: 25 3540

PLEASE SEND: PACKAGE No. 1 (No. of Sets) Set(s) \$99.00 each

PLEASE SEND: PACKAGE No. 2 (No. of Sets) Set(s) \$169.00 each

I ENCLOSE ( ) CASH ( ) CHEQUE ( ) MONEY ORDER TOTAL \$

NAME

ADDRESS

CODE



# Computerised modelling & laser techniques aid loudspeaker design

Currently considered the weakest link in the audio reproduction chain, loudspeaker systems are coming in for a great deal of research and development attention, with both Philips and Wharfedale using lasers to show up standing wave patterns in cones.

Although the quality of loudspeakers has been considerably improved in recent years, loudspeaker design has been more a question of intuition and practical experience, rather than a quantitative understanding of the behaviour of loudspeaker cones. Engineers have long had to deduce what might be going on in cone and voice coil assemblies, relying on roundabout means and subjective judgements to confirm those deductions.

Reacting to this situation, Philips Research Laboratories in Eindhoven, The Netherlands, has developed a new computerised modelling technique as a step towards overcoming loudspeaker design problems.

The new modelling aid, developed by F. M. Frankort, enables the designer to perform a theoretical analysis of loudspeaker behaviour. This is done by using a computer to solve 12 simultaneous differential equations for a large number of frequencies and for various types of speaker cones.

In this way it has proved possible, for example, to calculate the frequency characteristics of the sound pressure and the radiated sound power as a function of the geometry and properties of the cone material.

In order to verify the theoretical results on an experimental basis, mechanical vibrations of the cone were visualised holographically (see photographs). In addition, the velocity of the coil, the sound pressure, and the sound power levels of the loudspeaker were recorded as a function of frequency.

At low frequencies the cone vibrates as a rigid entity. Above a certain frequency, standing waves appear on the cone surfaces. These can clearly be seen in Figs. 1 and 2.

Fig. 1 is an interferogram, obtained holographically, of a cone driven at a frequency of 2000Hz. At this frequency, nodes and antinodes begin to appear along the periphery of the cone.

In Fig. 2 the drive frequency was 9000Hz. The whole surface of the cone is now covered with patterns of nodes and antinodes, and the cone radiates little sound.

Experimental results agree quite well

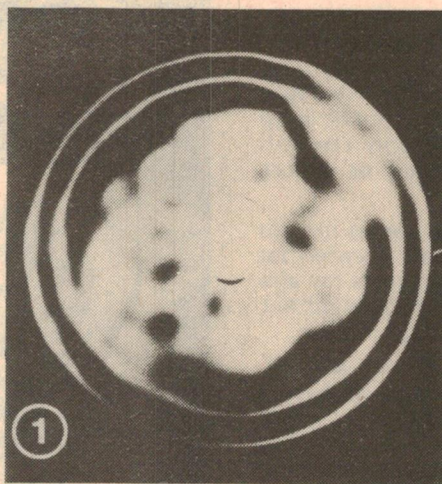


Fig. 1: interferogram of a speaker cone driven at a frequency of 2kHz.

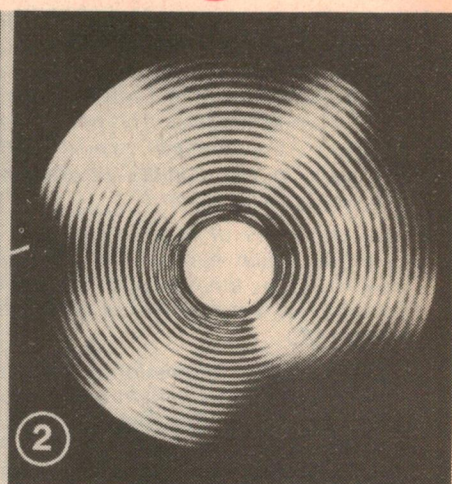


Fig. 2: interferogram of a speaker cone driven at a frequency of 9kHz.

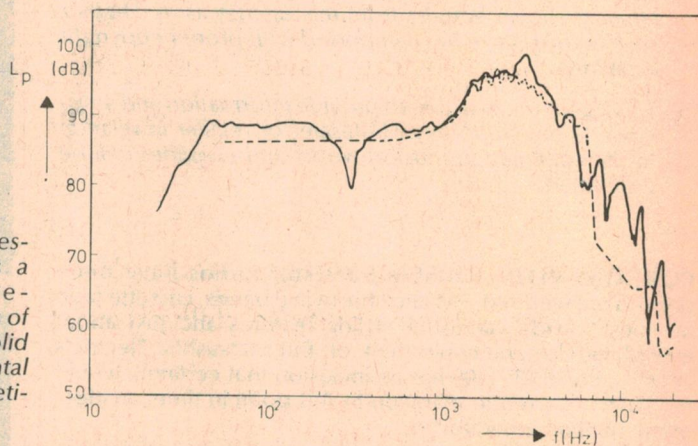


Fig. 3: sound pressure level  $L_p$  as a function of frequency on the axis of an 8in speaker. (Solid line experimental dashed line theoretical.)

with theoretical predictions. The graph illustrates the satisfactory agreement obtained between the measured and calculated frequency response of the sound pressure level ( $L_p$ ) on the axis of an 8in loudspeaker in a box (solid line, experimental; dashed line, theoretical).

Philips state that the new computerised analysis technique could eventually lead to further improvements both in the method of design and in the quality of loudspeakers.

Meanwhile, at the Wharfedale factory in England, only a stone's throw from where Gilbert Briggs created the brand—largely on subjective evaluation—Technical Manager Ken Russell and Senior Projects Engineer Alex Garner are combining the traditional approach with modern instrumentation and laser analysis.

To give some direction for their current work, the Wharfedale Research Department produced a brace of "black boxes" which are used in conjunction with a high quality amplifier/loudspeaker system to introduce identifiable resonance and intermodulation effects.



The subjective significance of these effects can be gauged, as necessary, by enlisting the aid of listening groups, expert and otherwise.

By such techniques the Wharfedale team have been able to establish that damaging colourations can be due to low-Q resonances in the mid-range—the kind of effect that has traditionally been overlooked or dismissed somewhat lightly when viewing ordinary pen-plotted response curves. Armed with this kind of information, the laser becomes a valuable tool in exposing how such effects might be occurring in typical cone structures.

Using techniques developed by holography expert Peter Fryer, PhD, a single laser plate, similar in appearance to those in Figs. 1 & 2, can be made to yield the equivalent of a 3D movie as the eyes are moved to view the hologram from different angles. Already the team has been able to pin-point the effects of voice coil terminations in tweeters, and a variety of other effects in sandwich cones, which can be countered once they have been positively identified.



# TEN YEARS FROM NOW, WILL THE BEST ELECTRONIC ORGANS BE BUILT . . . LIKE THIS? OR THIS?

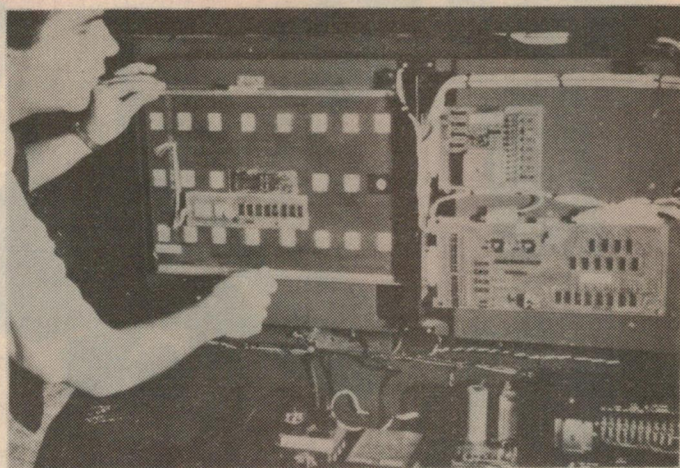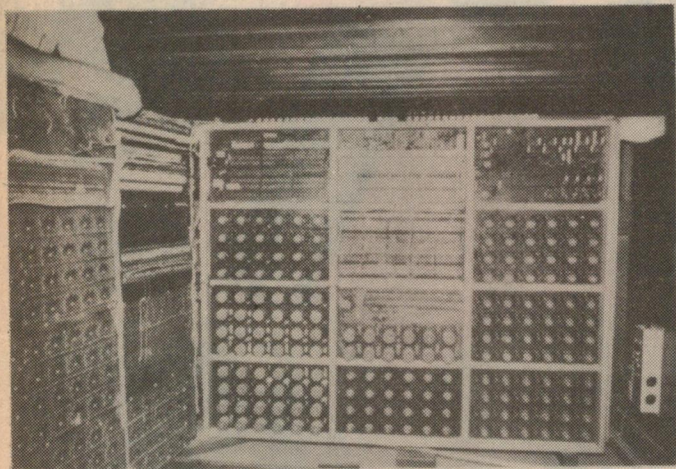

If you choose the system at the right, score yourself way ahead. Modern, digital large scale integrated microcircuits are the way of the future. Among other advantages, perhaps the greatest is their ability to deliver exact

results consistently, year after year. Applied to organs, this means a virtual end to the routine periodic maintenance heretofore considered an inevitable companion to consistent sound and performance.

Benefits like these, plus others, need not take ten years to obtain. They are obtainable today, in the "years ahead" Allen Digital Organ, an instrument fast becoming a legend of our time.



**Allen**

**ORGAN  
COMPANY**

MACUNGIE, PA. 18062

©1975

## ALLEN ORGANS (AUST.)


39 ROLAND AVENUE, WAHROONGA, N.S.W., 2076  
32 WOODHOUSE ROAD, DONCASTER EAST, 3109

- ☐ Please send information on the Digital Computer Organ.  
☐ Enclosed is \$3.00 plus postage; send stereo demonstration record.

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_



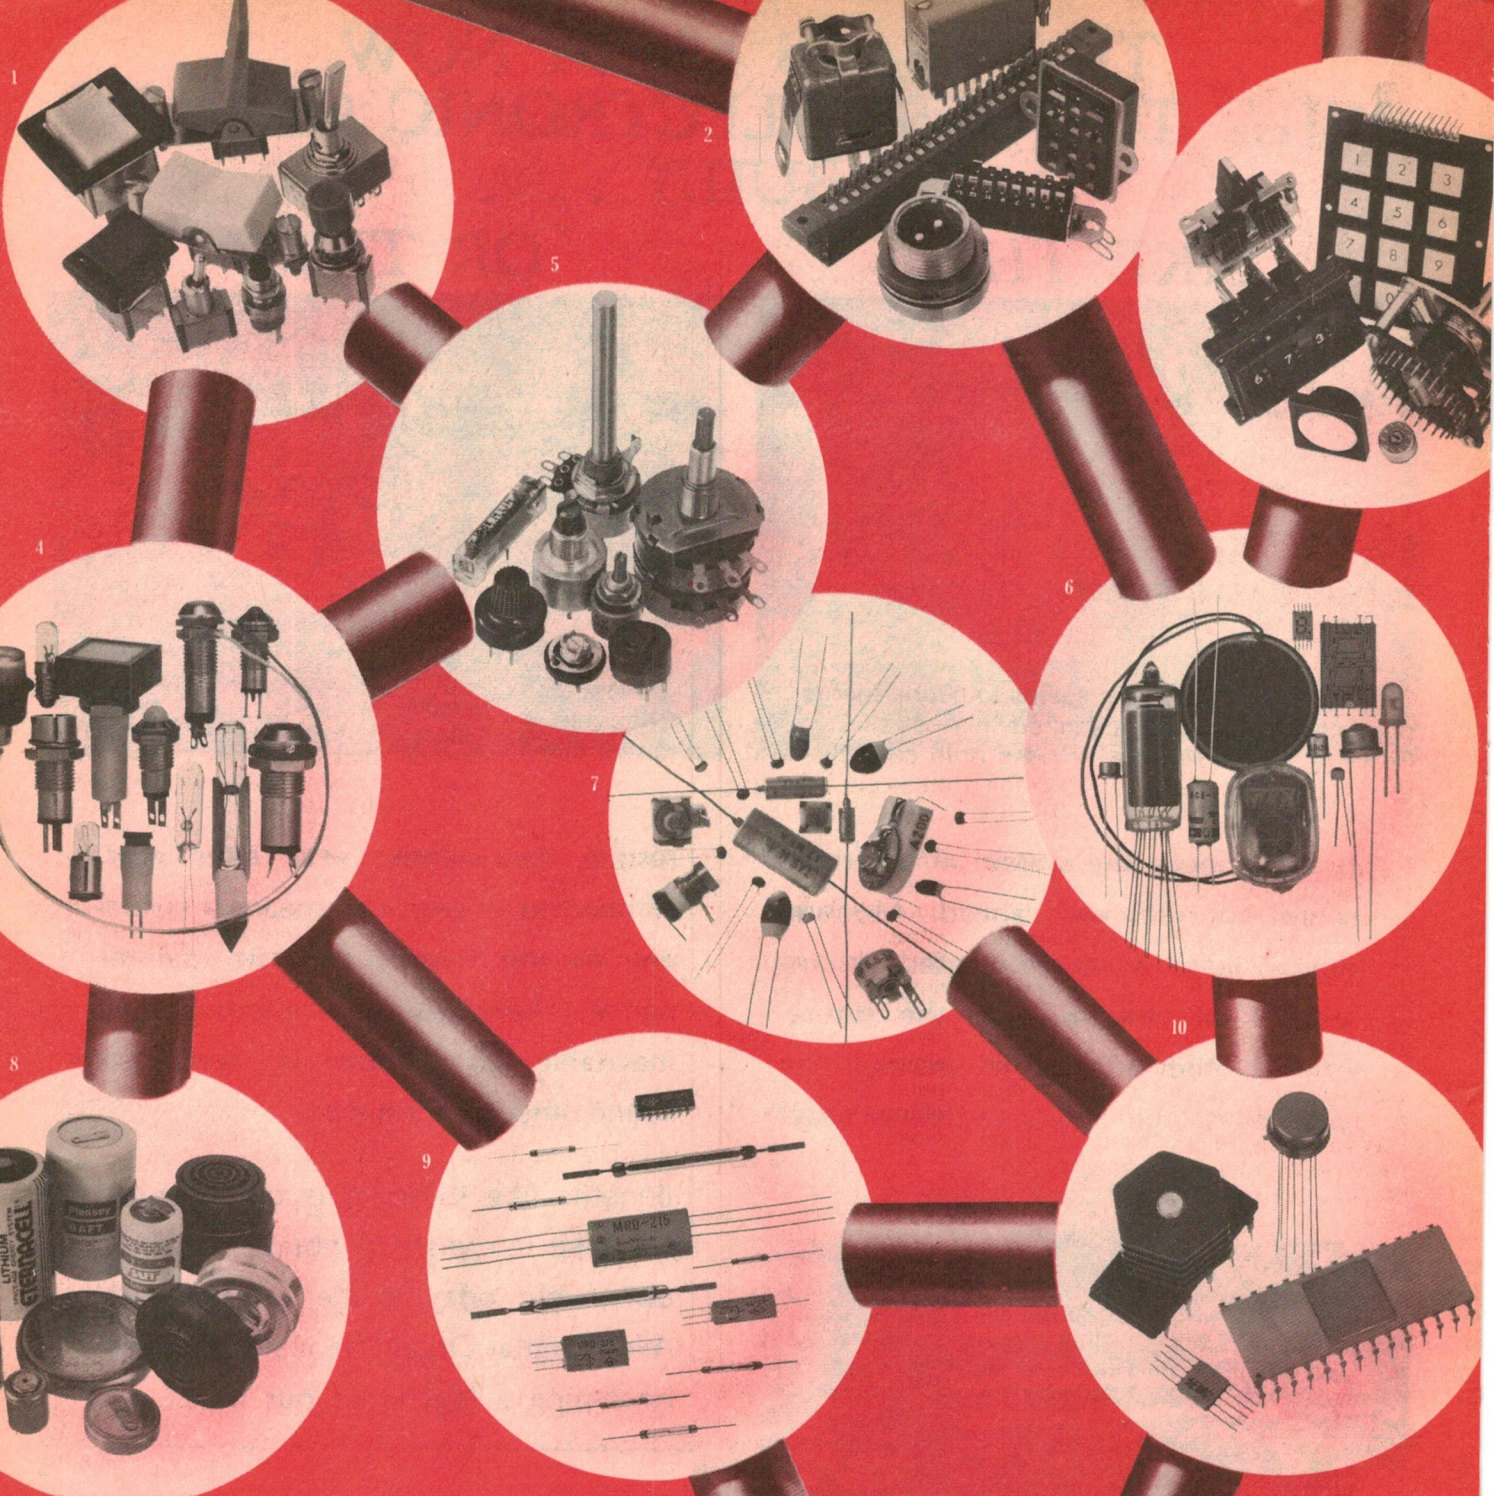

## An integrated nuclei of quality.

Plessey brings you today's most advanced, professional components from leading international manufacturers.

C & K, JFD, Mallory, EECO (USA), OKI, Okaya-Rodan, NEC, Kokusai (Japan), SAFT, Sloan (Europe) and Panton, Hivac (UK) are just a few of the many renowned names represented by the Plessey Professional Components Division.

A basic cross section of the wide range available through Plessey and its agents is depicted above and includes: —

1/ Switches toggle, rocker, paddle, push-button in many shapes and sizes (incl. illuminated styles)

2/ Connectors P.C. edge, multi-circuit, heavy duty, BPO and DEF approved

3/ Switches rotary, lever key, thumbwheel, touch-activated (incl. illuminated)

4/ Lamps & indicators filamentary, neon and LED styles

5/ Potentiometers moulded carbon track and wire-wound of both commercial and professional standard

6/ Optoelectronic devices LDR's, LED's, photodiodes, phototransistors, photocouplers and 7 segment, alphanumeric and cold cathode displays

7/ Capacitors tantalum, electrolytic, chip ceramic, variable ceramic, precision piston trimmers

Resistors metal glazed 1/16 Watt, 30 to 1000M  $\Omega$

8/ Batteries nickel cadmium (rechargeable) and lithium (primary)

Sonalerts electronic audible signals

9/ Dry reed inserts and relays

10/ Microelectronic I.C.'s communication, audio and power control styles, MOS devices, high speed dividers, microwave devices (X-band etc.)

### PLESSEY

Plessey Australia Pty Limited  
Components Division  
Box 2 PO Villawood NSW 2163  
Telephone 720133 Telex 20384

Melbourne Plessey Australia Pty Ltd 423921  
Adelaide K.D. Fisher & Co. 2236294  
Brisbane L.E. Boughen & Co. 3708097  
Perth H.J. McQuillan Pty Ltd 687111  
N.Z. Henderson (N.Z.) 64189

Please send me more information on items ticked

1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐ 7 ☐ 8 ☐ 9 ☐ 10 ☐

Name \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_


Post Code \_\_\_\_\_

**COUPON**



# NOUVEAU NEU NEW!

## Cassettes and tapes from BASF

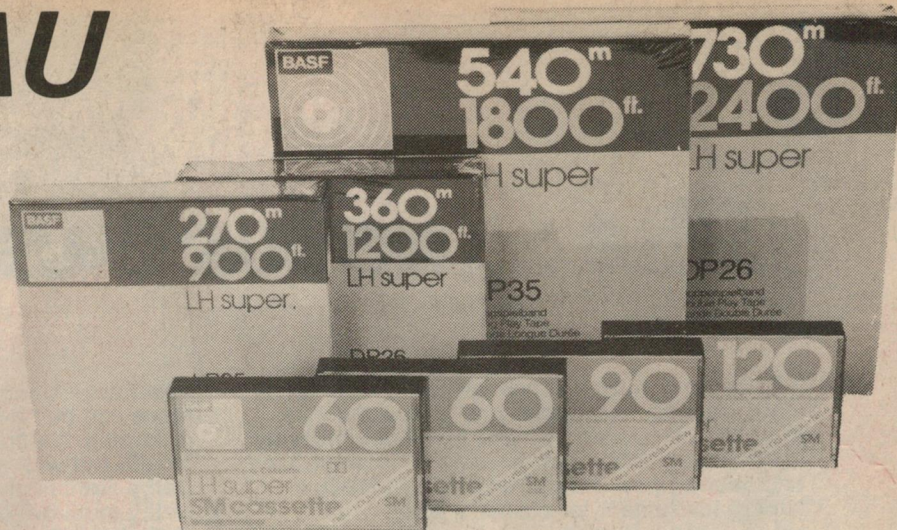

"New", in any language, seems to be the theme behind the latest tape products from BASF, marketed in Australia by Maurice Chapman & Co Pty Ltd. The release includes both cassettes and reel-to-reel tapes for the advanced enthusiast or for professional use.

For many who regard coated magnetic tape as a post-war development, it may come as something of a surprise to read in their product data that BASF supplied the first 50,000 metres of such tape to A.E.G. in 1934. The development program behind their latest "LH Super" tapes climaxed in 1974—the 40th anniversary of the initial shipment—with worldwide release being effected in the current year of 1975.

While it may be possible to nominate certain milestones in the 40-year history of coated magnetic tape, from the viewpoint of the user the story has really been one of gradually improving technology which has put each new generation of tape a little ahead of the last. Thus, while this year's tape is only a little better than last year's, both are a lot better than the tape available ten years ago, or twenty, or thirty, or that initial run back in 1934!

Interestingly enough, those who purchase and appreciate today's high quality audio tapes owe a lot to tape users in other fields. The demand for a tape which could store frequencies up to 6MHz for television recording forced tape manufacturers to pursue technology and formulations aimed at securing a frequency response far beyond anything that would normally have been sought for audio work. But the know-how that is now producing top quality video tape has taken most of the hassle from cassette tape capable of retaining the full audio range (typically 15kHz and beyond) at a scanning speed as low as 1-7/8ips.

Similarly, computer involved customers have demanded a tape which is not able for its freedom from "drop-outs". A bubble in the coating, or a tiny fragment

which flakes from the surface of an audio tape may not even be noticed, while a similar falling in a video tape may produce only a slight flick on the screen. But, in a computer situation, imperfections may drop-out vital "bits" of digitised information, leading to possibly serious errors. Once again, technology aimed at minimising drop-outs for computer customers has contributed to the ultimate quality of audio and video tapes.

As far as their new LHS tape is concerned, BASF claim that the coating is "pure maghemite", involving iron oxide particles smaller and more evenly graded than ever before. Largely because of this, the intrinsic tape hiss is reduced by something over 2dB relative to earlier standards. Considered alone, 2dB is a very modest improvement but it is one more step in the right direction.

BASF also claim an improvement in their coating techniques which has resulted in a greater density of particles in the coating, with good magnetic orientation. This has made possible a wider, flatter frequency response and a 3dB increase in the maximum recording level as determined, for example, by an arbitrary 5% distortion limit.

Taken together, the lower noise and higher "overload" ceiling offer a better quality recording for a given dynamic range, or improved dynamic range within previous concepts of signal/noise ratio and overload.

Special attention has been given, also, to the mechanical aspects. A "super smooth" finish, self lubrication and close tolerance components in the housing ensure a long service life, with a minimum of trouble, from the new BASF LHS cassettes. They are available as C-60,

C-90 and C-120, styled in black inside a black flip box.

As an aid to storage, BASF are also offering "Modul-Lock" units, a moulded stand accommodating four cassettes. They can be used free-standing on a table or shelf or can be interlocked to form integrated storage units—either free standing or attached to a wall.

The new range of LHS reel tapes takes advantage of the improved magnetic formulation and technology and shows a proportional improvement in performance characteristics, relative to previously published figures.

Two figures are particularly stressed by the makers:

The cohesive force is equal to 320 Oersts—the magnetic force which must be applied by the erase head to ensure that the tape has been fully demagnetised and "cleaned" prior to a new recording. The figure of 320 Oersts, according to BASF, ensures that LH-Super tape will operate on all recorders without special provision or adjustment.

The relative remanence is 80%—an indication of the high proportion of the magnetic energy applied to the tape which is retained in the coating. The result is a higher level on playback and less likely intrusion of "noise" arising in the playback amplifier.

The new open reel tape is being marketed in two forms. The long play type is designated as LP35LHS and comes on a 13 cm spool accommodating 270 metres, or an 18 cm spool accommodating 540 metres. Because of its thicker base, this tape is recommended for hard wear or for machines which may impose higher than average tensions upon it.

Where this is not a problem, the very flexible double-play tape DP26LHS is recommended, offering as it does an increase to 360 metres and 730 metres on the same spool sizes.

Further information on the new BASF LHS tapes may be obtained from Maurice Chapman & Co Pty Ltd, 276 Castlereagh Street, Sydney 2000.



# The case for cassettes...

Who better than Sony to develop a cassette deck that genuinely rivals open reel in performance. After all, Sony made its name by leading the way in open reel technology. That same brilliant Sony engineering now brings you the TC-177SD, a superb instrument for cassette fans.

Consider: Wow and flutter less than 0.07%; Frequency response 20Hz to 20kHz; Signal to noise of 55dB (and even better with Dolby on). All that and cassette convenience!

Sony did it by combining its proven closed-loop dual capstan drive with a number of remarkable new cassette deck developments. First, the TC-177SD has three heads for separate erase, record and replay. This ingenious design avoids the compromise between record/playback head design and permits A/B monitoring of sources and just recorded signals for instant checking.

Second, the TC-177SD is unique in providing Bias/Equalisation switching so that Sony's fantastic


new Ferri-Chrome and the normal chrome dioxide tapes can be "tuned" for ideal balance in recording. Naturally Dolby noise reduction is inbuilt. But with a typically Sony difference; four Dolby circuits provide such super features as Dolby monitoring, there's a Dolby oscillator for optimising the particular tape in use, and for Dolby-encoded broadcast FM.

Functions, too, are up to the highest reel standard: feather touch control buttons; FM multiplex filter; full mixing for microphone and line inputs; peak level indicators are LED to complement the Limiter and 2 large VU meters; a memory counter for auto location of desired part, and there's an auto shut-off.

Everything you've wanted for easy, professional-quality cassette recording is now together in the fabulous Sony TC-177SD.

**See it and hear it, soon.**

## Sony TC-177SD puts 3 heads together

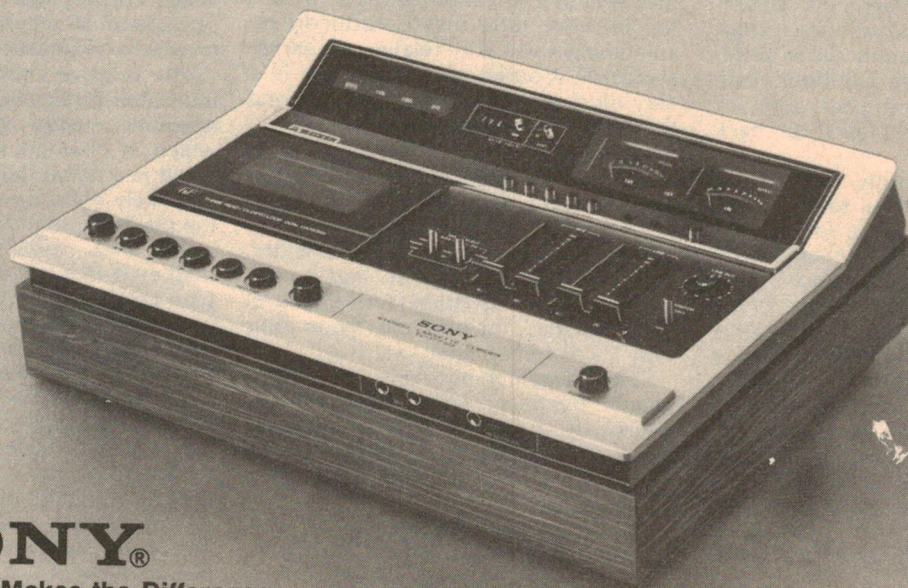


**SONY**  
Research Makes the Difference

GAC.S.7558



## Quad FM3 Tuner

Quad is the brand name of the Acoustical Manufacturing Company Limited of England, which has long had a high reputation in the high fidelity field. Here we review the latest model with the Quad name, the FM3 tuner which has complete stereo multiplex facilities in a simple unadorned case.

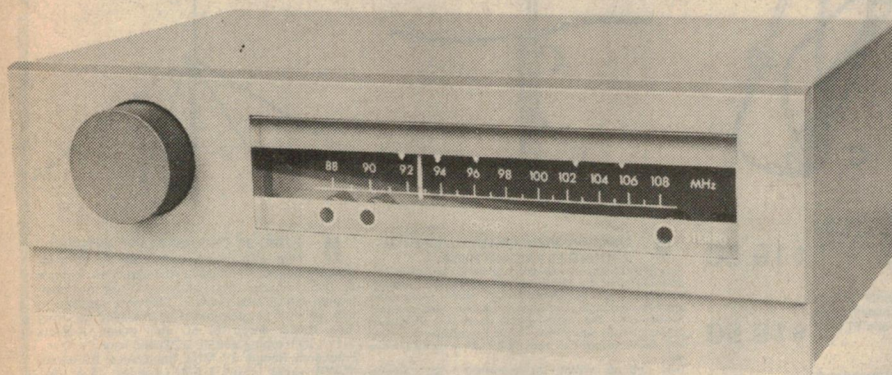

Compared to the majority of high fidelity equipment sold these days, the Quad FM3 tuner must seem to have quite a spartan appearance indeed. In this aspect it matches the styling of the Quad 33 stereo control unit.

Colour of the front panel is a hard-to-describe earthy tone, which is offset by an orange stripe at the top and bottom of the dial scale. The dial scale is screen-printed in white. A single large knob adorns the front panel and as you might have guessed it is used for tuning. Pressing the knob and turning also allows the five station markers to be set to any point on the dial.

In keeping with the restrained styling, dimensions are also modest at 260 x 92 x 165 mm (W x H x D) including knobs and rubber feet. Mass is 2.7kg.

Tuning meters are not provided. Instead, two indicator lights on the left hand end of the dial provide accurate indication that the FM3 is correctly tuned to the centre of an FM station. A similar

light at the right-hand end of the dial is the stereo indicator.

While the heavy diecast front panel is spartan in appearance, the plastic dress panel on the rear of the FM3 seems almost "busy" by comparison. It is clearly labelled, as can be seen in the photo.

A small knob is provided to vary the muting threshold between RF signal inputs of zero and 250 microvolts. This is a useful feature which is not found on many tuners. When set correctly it enables a minimum of interstation tuning noise to be produced while still enabling reception of all desired stations. Admittedly it is not important at the moment in Australia.

As can be seen from the photograph of the interior, two large PC boards accommodate the circuitry. They are neatly laid out and all components are labelled clearly. One board accommodates the decoder and power supply while the other contains the RF section and detector.

While the circuit is relatively straightforward there are a number of interesting features. The RF section is fairly conventional. It has 75 ohm coaxial input or 300 ohm balanced input. Two dual-gate MOSFETs are employed, one in the RF stage and one in the mixer. The local oscillator is an NPN transistor operating in common-collector mode and the oscillator signal is injected into the second gate of the mixer MOSFET.

There is no AFC (automatic frequency control). Apparently Quad are of the opinion that it is not necessary and this is perhaps arguable. The stability of modern solid-state FM front ends is such that the extra circuitry required is really not essential, even though there are not many components involved. There is also a disadvantage with AFC in that it should ideally be switched out when tuning into a station and then switched in, which is more complicated than merely twisting the knob.

IF output (at 10.7MHz) from the mixer stage is fed via an IF transformer to a multi-element ceramic filter and thence to the IF amplifier, limiter and detector integrated circuit (RCA CA 3089 or equivalent).

A DC voltage from the detector is used to drive the tuning indicator circuitry, which consists of seven transistors. Basically the tuning indicator is a differential amplifier. Balanced output from the differential amplifier drives two Darlington emitter-followers which feed miniature incandescent lamps. When tuning is correct both lamps have the same brilliance.

Part of the alignment procedure of the FM3 is involved with setting the tuning indicator circuitry so that the two lamps have equal brilliance. While the system works very well in practice and is equally effective as a centre-reading meter, we wonder why LED indicators were not used in place of the lamps. Besides being potentially more reliable, they could be more attractive. More on that point later.

When the tuner is not receiving a signal (eg, when tuning between stations) there is a lot of high frequency noise at the output of the detector. This is amplified and detected and used as a control signal to mute the input signal to the decoder and to extinguish the tuning indicator lamps.

The multiplex decoder uses the well-known Motorola MC1310P integrated circuit in a normal configuration, albeit with a few refinements. Instead of disabling the internal VCO to obtain a mono signal from the decoder, the audio output from the detector is fed to an emitter-follower and thence to a separate pin of the output DIN socket. This can then be connected to a separate input on the main amplifier. Thus "direct mono" operation can be obtained, for higher quality in noisy signal conditions.


Left and right outputs from the decoder IC are passed through active filters with an ultimate slope of 24dB/octave to



The rear panel of the Quad FM3 is a plastic moulding which shows all labels clearly.



# NEW AERIALS!

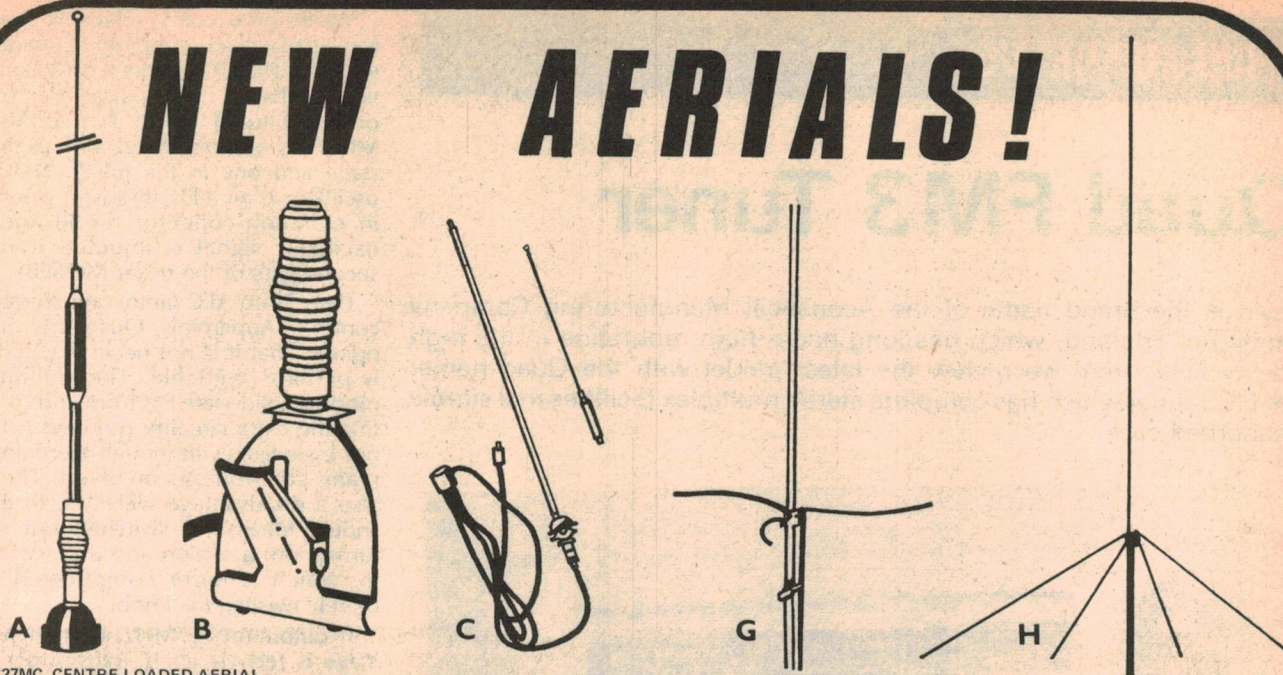

## A 27MC CENTRE LOADED AERIAL

Short on size, but not on signal! Just 20 inches long. Includes centre loading coil, stainless steel spring and beautiful black phenolic base on the new "Quick Grip" mount. Solderless lead connection with a PL-259 connector at set end of coaxial cable.

**\$19.50**

## B 27MC GUTTER GRIP

The gutter clip CB mobile antenna designed to mount on rain gutter of any automobile. Features no hole installation. All antenna parts chrome plated brass or stainless steel. Gutter clamp zinc plated. Includes RG 58/U cable and PL-259 connector. (No Spring). HIGHLY EFFICIENT.

**\$19.50**

## C CB-AM COMBINATION AERIAL

Cowl mount antenna. Serves two functions in one—Citizens Band AM broadcast! This item eliminates the need for two antennas. This single sturdy heavily chromed antenna fits easily into 7/8" to 1-3/16" hole left by the auto antenna. Only 46" long in operating position (collapses to 31"). The 313 incorporates an automatic dividing harness which includes a 1' low loss cable to your AM set, a 2' cable to your CB set, and a 5' cable to your antenna (PL-259 included). The divider coupling unit fits snugly up under the dash.

**\$34.95**

## D 27MC BASE LOADED CLIP ON WHIP

This short 20" whip fits transceivers with 9/16" or 3/8" aerials. Simply slips over closed aerial stub-base loading coil gives excellent performance.

**\$12.00**

## E 27MC BASE LOADED ON SPRING


Base loaded antenna with attractive grey jacket and chrome fittings. Stainless steel whip with adaptor that provides for 1-1/4" fine tuning adjustment. A stainless steel spring protects against shock. Antenna easily snaps into "Quick Grip" mount. Solderless lead connection at antenna PL-259 at set end of coaxial cable. Only 46" high.

**\$29.50**

## F 27MC TRUNK MOUNT WHIP

Solid fibreglass whip extremely tough. Centre loading wound on whip—covered with black abrasion-resistant Thermofit tubing. Flat VSWR across the band excellent performance. Includes trunk lid mount. Cable & PL 259 plug removed in seconds.

**\$29.50**

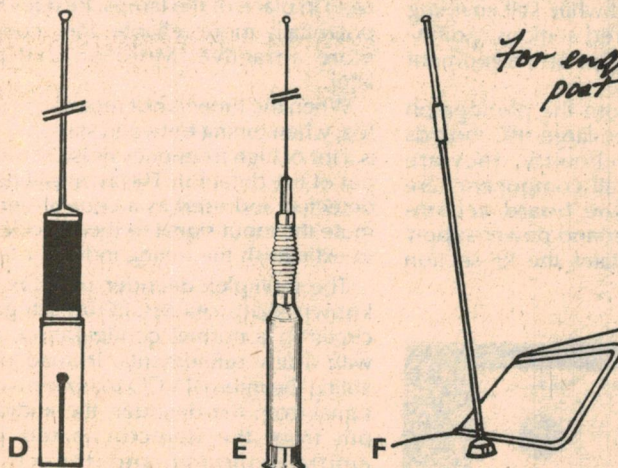

*For enquiries send s.a.e.  
post and packing extra.*

## G 27MC GPV BASE LOADED VERTICAL GROUND PLANE ANTENNA


A ruggedly constructed low-cost high performance vertically polarized, omni-directional base station antenna. It develops transmitting gain of 3.8 dB through pattern compression and a lowered angle of radiation along with improved signal-to-noise ratio. The matching stub places it at DC ground potential which substantially lowers the residual noise level and results in gains as high as 19 dB in signal-to-noise ratio. Gain: 3.8 dB VSWR: (At resonance) 1.25:1. Coaxial Feedline: 52 ohms. Omni-Directional Pattern Overall Height: 212 inch. Diameter of Radiator: 1-1/2 inch to 1-7/16 inch. Mast Bracket Accepts: Up to 1-5/8 inch. Weight 5.5 lbs. Full 1/2 Wave.

**\$49.50**

## H 27MC 36 GROUND PLANE ANTENNA

High efficiency Ground Plane Antenna for CB base station. All aluminium construction. Accepts PL-259 connector. Solid aluminium 108 inch heat-treated radials and radiator. Elements supplied in two 54 inch lengths joined by threaded coupling nuts. Radial droop for 50 ohm match. Accepts 1-1/4 inch tubing and PL-259 connector. Frequency Range: 27 MHz. Impedance: 50 ohms. VSWR: Less than 1.5:1. Weight: 4.5 lbs. Wave: 1/4.

**\$35.00**

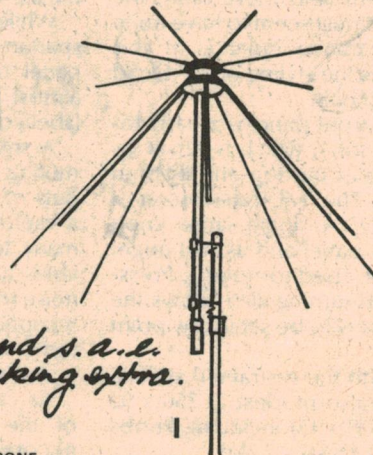

## I HAMS-DISCONE

80 MHz TO 480 MHz



A highly efficient discone type antenna. All aluminium with 8 radials & 8 radiators. Accepts PL 259. Radials droop for 50 ohm match. Bracket to suit 1-1/4 tubing.

VSWR: Less than 1.5:1.

Gain: 3.4dB compared to 1/4 wave g. plane ant.

Weight: 5.7 lbs.

**\$69.95**




**PETER SHALLEY  
ELECTRONICS**



**554 Pacific Hwy.  
Killara NSW 2071  
TEL. 4982611**



# HIFI REVIEWS

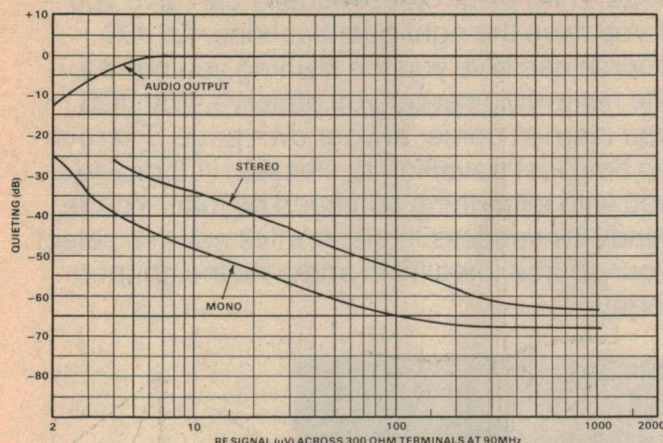


Curves showing quieting: output signal-to-noise ratio versus RF input signal, in both mono and stereo modes.

Frequency response in the mono mode (using the separate mono output) was 10Hz to 15kHz  $\pm 1/2$ dB and only 0.8dB down at 20kHz. Distortion ranged from 0.06% at 7.5kHz to 0.27% at 100Hz. Surprisingly distortion in the stereo mode was very little worse with the measurements all less than 0.3% and typically about 0.25%.

Frequency response in the stereo mode was within  $\pm 1/2$ dB from 10Hz to 12kHz and 2dB down at 15kHz. These frequency response figures were taken with the abovementioned filters out of circuit. Separation between channels checked out at 47dB at 100Hz and 1kHz and 31dB at 10kHz. These are excellent figures.

We should note at this stage that the tuner referred to in these tests has serial number 18094 and not 14581 which is shown in the photographs. The latter

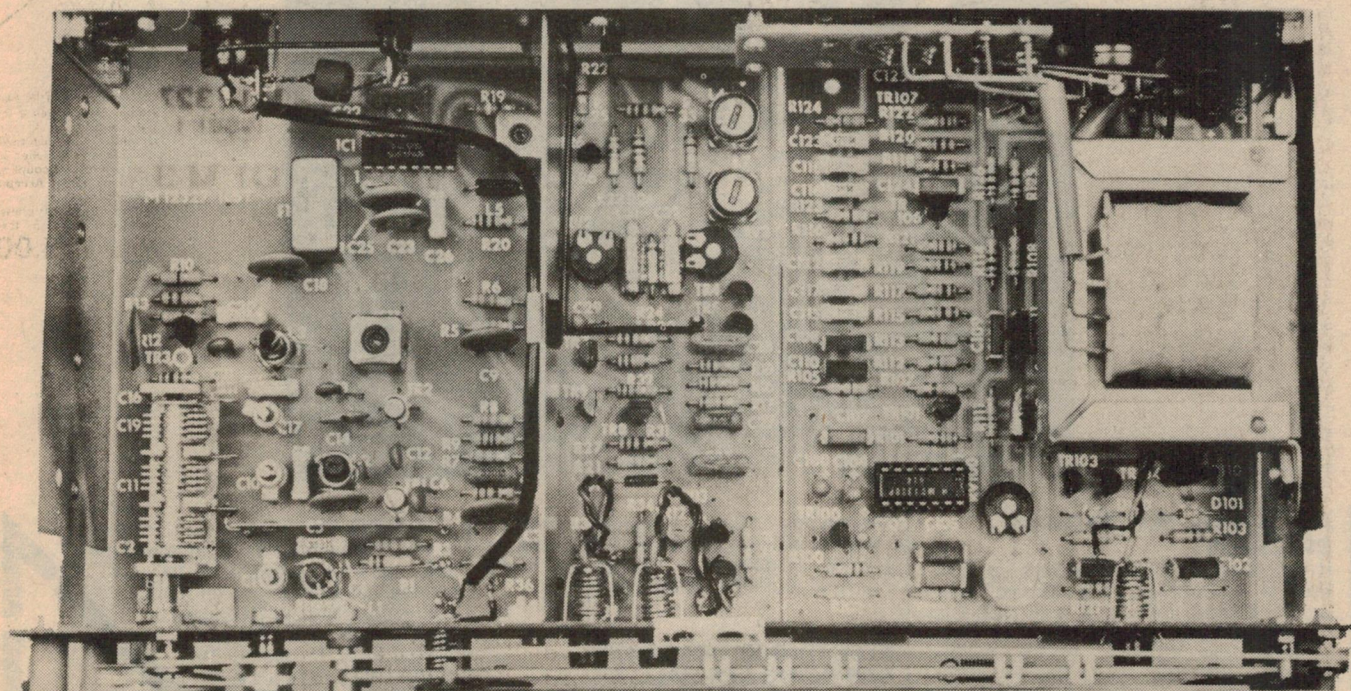

A relatively bulky transformer powers the Quad FM tuner. Neat layout is easy to service.

remove high frequency hash. De-emphasis is correct for Australia at 50 microseconds.

In use we found the Quad FM3 gave entirely satisfactory service. Our only complaint involves the appearance of the tuning indicators and the stereo beacon. These have little translucent windows through which they are supposed to shine—but since the normal viewing angle is from above the tuner, one can see the filaments through the transparent portion of the dial. This does not impair the operation, it just looks corny.

Many of the results of the performance testing are shown in the graph of the quieting curves. A look at the audio output curve shows that full limiting is achieved with an RF signal of 6μV. 30dB signal-to-noise ratio for a mono signal

was achieved with an input of 2.5μV. Ultimate signal-to-noise ratio for mono was 68dB and for stereo 64dB.

Note that although we show the stereo curve beginning at a signal level of 3μV the stereo indicator actually lights up for signals as low as 1.5μV.

All tests in the stereo mode were made using filters to reject the residual 19kHz and 38kHz components. 19kHz output was 37dB down from full audio output while 38kHz output was 57dB down.

So far then, the performance figures are good but certainly not spectacular. Where the Quad does excel is in the results for frequency response, harmonic distortion and separation between channels. These results are for an input signal of 1 millivolt to the 300 ohm antenna terminals and refer to 100% modulation.

tuner was submitted for review but testing showed that it was malfunctioning and it was replaced by the distributors.


In summary, we can state that the Quad FM3 tuner is an eminently satisfactory performer which is notable for its low distortion, wide separation and flat frequency response. It should have special appeal to those who like gimmick free styling. It is a pity that import costs and duties make it so expensive. Recommended retail price is \$331.65 including sales tax, insurance and freight to main centres.

Further information of the FM3 tuner and other equipment in the Quad range can be obtained from the Australian distributors, British Merchandising Pty Ltd, 49-51 York Street, Sydney, NSW 2000. (L.D.S.)



# Six top careers in electronics

A top salary, job security and positive success. That's what a career in the exciting and rapidly expanding electronics industry can give you—if you have the right qualifications. An ICS course can give you the training you need for the rewarding career you deserve. With ICS, you learn at home, at your own pace. There's no time lost travelling to classes; ICS provide you with everything you need by mail. You're ready for success in electronics now, so select your course, then fill in and post the coupon today.

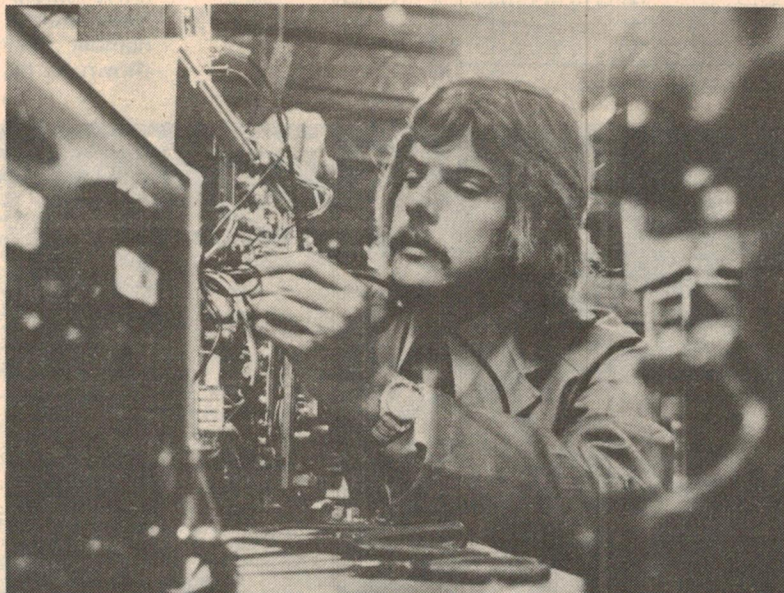

## INDUSTRIAL ELECTRONICS SPECIALIST

If you're interested in specialising in industrial electronics, this course offers technical-level training. It is an ICS Diploma Course, with a full list of subjects ranging from Circuits, Electronic Diagrams and AM/FM Radio Receiving Systems to Ultrasonics and Computer Principles. The full range from the most basic to the most sophisticated technology.

## ELECTRONICS TECHNICIAN

This Diploma Course will give you a particularly thorough knowledge of Electronic Technology. You will learn the principles, applications and maintenance of electronic equipment in industrial and other fields, including instruction on radio principles. Major sections cover electrical and electronic measuring instruments, telemetering, facsimile and radio-electronic telemetry.

## COMMUNICATIONS BROADCASTING SPECIALIST

This course prepares students wishing to sit for the P.M.G. examinations for the various proficiency certificates—Commercial Operator's Certificate of Proficiency (Aust.), Radio-Telegraph Operator's Certificate of New Zealand, Broadcast Station Operator's Certificate of Proficiency and Certificate in Radio

Technology (New Zealand). Sections covered include: Electrical Theory, Radio Theory, Regulations, Telegraphy Tests, Practical and Oral Questions.

## ELECTRONIC COMPUTER SERVICING SPECIALIST

A specialist course designed to provide a sound knowledge of the technical aspects of computers; how they function and their practical applications, including programming. The course covers Number Systems and Digital Components; Organisation and Maintenance of Computers; Servomechanisms and Fundamentals of Computer Programming.

## COMPUTER TECHNICIAN

This compact Diploma course will be of special value to technical people who are likely to be concerned with the installation, maintenance and operation of digital computers. It provides a sound introduction to Electrotechnics, Electronic Theory, Electronic Computers and Digital Computer Programming. Practical applications are stressed throughout.

## COLOUR TV

If you already have a knowledge of the principles and practice of TV, this course will prepare you for the introduction of colour TV. Subjects covered in detail include: Colour in TV, the Colour TV system, Picture Tubes and Receiver Circuits for Colour TV, Troubleshooting Colour TV, Alignment of Monochrome and Colour Receivers and the PAL System.

400 PACIFIC HIGHWAY,  
CROWS NEST, N.S.W. 2065  
and 182 Wakefield Street,  
Wellington, New Zealand.

# ICS

Please provide me with information

about the Career on \_\_\_\_\_

Mr/Mrs/Miss \_\_\_\_\_ Age \_\_\_\_\_

Address \_\_\_\_\_

Postcode \_\_\_\_\_

Occupation \_\_\_\_\_

II.OI.24 VK

EAT

POST THIS COUPON TODAY TO



## Yamaha YP-450 Turntable

Yamaha now have a comprehensive range of high fidelity equipment spanning every price range. Here we review one of their lower-priced turntables, the Yamaha YP-450. It is a two-speed, belt-driven unit supplied without cartridge.

A recent trend in turntable design has dispensed with the steel or diecast base plate and separate timber platform and substituted a thick sandwich of compressed particle board. This material is quite dense and is dimensionally stable.

Whether or not this approach is cheaper we do not know, but it must be admitted that it allows a cleaner styling to be achieved. And it is definitely an improvement on some of the quite flimsy timber or plastic platforms we have seen.

On the YP-450 the timber platform is glued up from three layers of 15mm thick particle board which have been milled or routed to provide cavities for the motor, speed change mechanism, arm terminations and other hardware. A hardboard cover closes off access to the underside and the whole assembly is suspended on four compliant rubber feet to provide acoustic isolation from bench or shelf vibrations.

Partly as a result of the baseplate-cum-plinth construction, the styling of the YP-450 does seem particularly light and clean without being in any way flimsy. Helping that impression is the clear perspex cover which, in this reviewer's opinion, is an improvement on the dark tinted covers on some other turntables. Why should a turntable cover be so dark so that you cannot see whether it has a record on it or not? And anyway a dark perspex cover only makes the inevitable accumulation of dust more noticeable.

Another attractive feature of the cover is that it has spring-hinges which are friction-loaded to allow the cover to stay open in a number of positions and also prevent it from falling with a bang when it's lowered. A small point perhaps, but many turntable covers have quite unsatisfactory hinges. The cover is not removable.

Overall dimensions of the YP-450 are 440 x 153 x 389mm and mass is 9.4kg. Clearance required behind the hinges to allow the cover to open fully is about 60mm. A connecting lead about 1.2 metres long is provided and this is fitted with RCA phono plugs. The mains cord is a figure-8 flex and our sample was fitted with the non-approved American 2-pin plug.

Two simple controls are provided for operation of the turntable. These take the form of two levers on a small panel on the right-hand side of the player. One lever selects the speed of 33 or 45 rpm.

The other switches the motor as well as providing the lift and lower function for the arm. Both lifting and lowering of the arm are viscously damped. Apart from this, operation is completely manual and there is no automatic cut-out or lift-off at the end of a record.

The thick-rimmed platter has a diameter of 300mm and is driven around an inner rim by the usual flat rubber belt from a synchronous motor via a stepped pulley. The curved tubular arm is balanced longitudinally by its rotatable counterweight, which also sets the vertical track-

mum. The motor has plenty of torque and brings the platter up to speed within half a revolution. Main bearing friction is quite low—the platter took over 90 seconds to come to a halt from 33 rpm with the belt removed.

Bearing friction in the arm pivots is also very low, so low tracking forces can be employed with good quality cartridges.

We measured wow and flutter at 0.1% according to DIN 45507. This is the lowest result we have obtained on a belt-drive turntable to date. Very good.

Not so good was the rumble measurement. Yamaha quote it as 48dB without any qualification. We measured it 40dB with respect to 5cm/sec unweighted and with a 6dB/octave roll-off below 25Hz to simulate typical

*The Yamaha YP-450 is a manual turntable with simple controls. It is supplied without cartridge.*



ing force. Anti-skating is provided by a small dial at the base of the arm—we assume it is a spring mechanism.

No cartridge is supplied with the YP-450. The headshell has the standard EIA locking collar and colour-coded leads and will accept any cartridge with 12.7mm mounting centres. Slots are provided in the headshell to enable adjustment of the stylus overhang. Since the arm is to be used with a wide range of cartridges it is adjustable in height as is the lifting device. These adjustments are made by loosening off the appropriate Allen screws, and then making the setting.

Cable capacitance is less than 100pF so it is possible to use a CD-4 cartridge.


We found the adjustments for height of arm and lifting device quite fiddly, but the rest of the setting-up procedure was straightforward. Tracking force calibrations were within 5% of the mark and antiskating settings were close to opti-

amplifier response. While the result may seem reasonable we felt that the component of motor noise alone (measured with belt removed) was too high at minus 48dB and could have been improved with a more compliant motor suspension. So if you have loudspeakers with very good low frequency response and are often wont to play them at high levels with bass boost, motor noise from the YP-450 could possibly be troublesome during quiet sections.

Aside from our comment about rumble the Yamaha YP-450 is a good performer especially with regard to its low wow and flutter. Recommended retail price of the YP-450 is \$189 including sales tax.

Further information on the YP-450 and other products in the Yamaha range may be obtained from high fidelity retailers or from the Australian distributors, Rose Music Pty Ltd, 17-23 Market Street, South Melbourne, Victoria or interstate offices. (L.D.S.)





# News Highlights




## Electron beams speed integrated circuit manufacture

A major advance in the fabrication of integrated circuits has been achieved at Bell Telephone Laboratories by the development of an Electron Beam Exposure System, known as EBES. By using a beam of electrons to generate the microscopic patterns from which integrated circuits are manufactured, EBES can produce integrated circuit master pattern masks faster, more reliably, with fewer defects, and at lower cost than masks made by existing photographic systems.

"Integrated circuits are becoming more complex, more densely packed with devices, and larger every year," says Eugene Gordon, Director of the Pattern Generation Technology Laboratory at Bell Laboratories Murray Hill, New Jersey. "Pattern generation is one of the important limiting factors in integrated circuit technology," says Gordon, "but EBES now makes possible the routine production of master masks of a quality that was previously possible only at great expense."

The automated, computer-controlled EBES uses an electron beam to write the intricate, microscope integrated circuit patterns. Electron beams are superior to light beams used in conventional mask-making processes. This is because elec-

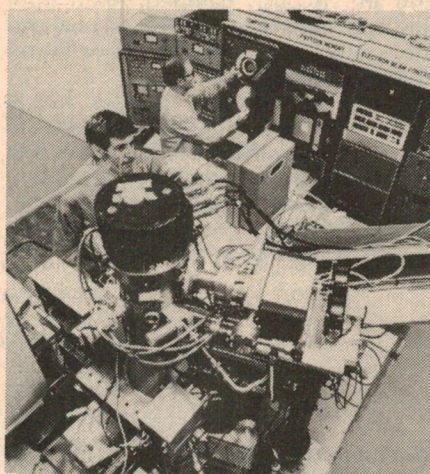

View showing the electron beam assembly and the process control computer.

trons have a smaller equivalent wavelength than light and a much "sharper" writing beam can be generated.

Spot size of the EBES electron beam is only 20 millionths of an inch in diameter—about one-hundredth the width of a human hair. Even smaller spot sizes can be used, but with a corresponding increase in the time and hence the cost needed to produce the mask.

EBES writes its intricate pattern on a chromium-coated glass substrate covered with a film of chemical "resist" which is sensitive to the electron beam. The unexposed portions of the resist and the underlying chromium are then etched out by chemicals, leaving a negative mask pattern of chromium on glass.

The electron beam system can write the microscopic pattern of a single integrated circuit chip over a larger pattern area than conventional optical cameras. Main advantage here is a simplification of the mask-making process for very large chips, resulting in substantial cost savings.


The EBES mask-writing operation is fully computer-controlled. Circuit design instructions are recorded on a magnetic tape and fed into the EBES computer which controls both the electron beam and the movable stage holding the mask blank. The stage, which has a positioning accuracy of a millionth of an inch, moves continuously whilst the pattern is being written. This results in a faster and more accurate exposure than if the stage stopped for each exposure, as do the sequential optical cameras presently used in the integrated circuit industry.

## New mercury arc lamp burns out on cue

Most light bulbs burn out almost immediately after their outer glass shells are broken. But not all. High-intensity mercury vapour lamps, of the type commonly used for street lighting, sports arenas, gymnasiums, and parking areas, can burn brightly for 100 hours or more after their glass shells have been broken. In fact, it may not even be realised that the lamp is broken.

And therein lies the danger. The mercury vapour arc tube emits intense ultraviolet radiation that can be quite dangerous when the lamp's protective outer glass shell (which normally absorbs ultraviolet) is broken. Depending upon the light intensity, time of exposure and distance from the light source, serious burns to the eyes and skin can result.

In order to overcome this hazard a US firm, Duro-Test Corporation of North Bergen, New Jersey, has developed a

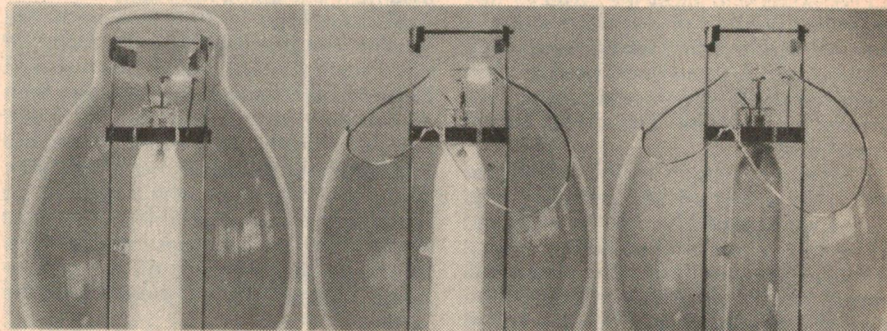

new type of mercury vapour lamp. Designated the Safe-T-Vapor lamp, the new lamp incorporates a small tungsten filament wire in series with one of the electrodes at one end of the arc tube. If the outer glass shell is broken, the tungsten filament quickly oxidises and evaporates, breaking the circuit.

Laboratory testing has shown that the new lamps are extinguished within one minute (sometimes within 30 seconds) of a breakage. According to Duro-Test, they have been demonstrated to the US Bureau of Radiological Health (which first raised the safety issue), and are now in production.



## Communications satellite for tracking, data relay

RCA Global Communications, Inc. has been awarded a \$US1.8 million contract by the National Aeronautics and Space Administration (NASA) for the design of a new satellite communications system. The system, the Tracking and Data Relay Satellite System (TDRSS), will permit the space agency to use direct satellite-to-satellite communications in its daily operations.

RCA Globcom and the General Electric Company, Space Division, have signed a team agreement for the Phase I study. The companies will develop a detailed operation and construction plan for the system, including technical, cost and business proposals.

A unique feature of the TDRSS program is the provision for private ownership of the system. NASA will lease services from the system owner, making monthly payments based on usage when service begins.

TDRSS will supplement and largely replace NASA's present tracking system including 18 earth stations located around the world. This ring of stations is now required to maintain communications with spacecraft as they move around the earth. The TDRSS system also will provide telecommunications support for the space shuttle program.

## Echo-free chamber for jet noise studies

One of the largest echo-free chambers in the world, recently completed at NASA's Lewis Research Center in Cleveland, is expected to increase the Center's capability in researching ways of reducing the piercing noise of jet airplanes.

Called the Engine Fan and Jet Noise Facility, it is the first all-weather indoor installation at Lewis able to test noise characteristics of quiet fans for advanced aircraft engines as well as perform evaluation tests on new ways to reduce the rumble of jet nozzles.

The facility is 52 feet wide, 56 feet long and 17 feet high. All surfaces of the \$US900,000 facility are treated with anechoic (echo-free) 30-inch fibreglass wedges, which absorb sound. Nearly 20,000 cubic feet of fibreglass was used in constructing the wedges. Acoustic tests have shown that the facility can absorb essentially all sound in the region of interest for aircraft engine fan models up to 20 inches in diameter. Jet nozzles up to four inches in diameter also can be tested in the chamber.

The facility uses an existing control room which has been adapted for noise research. The control room is linked directly to the Center's central computer, permitting rapid analysis of much of the data.

## Dr Lothar Rohde visits Aust. ... here for IREE convention

Dr Lothar Rohde recently visited Australia at the invitation of the Institute of Radio & Electronics Engineers and Kemtron Operations. Dr Rohde, who is co-founder of Rohde & Schwarz (a large West German electronics company), delivered a paper at the IREE Convention entitled "Planning an FM Network in Europe."

Regarded as the "father" of the FM network in West Germany, Dr Rohde was also responsible for planning the FM service in South Africa. While in Australia, he met senior personnel in



Dr Lothar Rohde

the broadcasting industry and held talks with his Australian distributor, Jacoby Mitchell Ltd.

Dr Rohde last visited Australia in 1974 as an expert witness at the McLean Inquiry into FM broadcasting. Observers say that it was his submissions that drove the final nail into the UHF coffin, paving the way for an FM broadcasting service on VHF.

## European Cos-B satellite will detect gamma rays

Recently launched atop a NASA rocket, the European COS-B satellite will detect and locate gamma rays in space—the most energetic and penetrating form of radiation known. The satellite was developed for the European Space Agency (ESA) by European industry, with a 25 percent share of the development program taken by the British Aircraft Corporation.

COS-B is an astronomical observatory which will enable scientists to study extra-terrestrial gamma radiation. The rays come from radioactive atoms and nuclear explosions or may be the remnants of exploding stars or quasars, pulsars and other radio and X-ray sources.

The satellite has a planned operational

life of two years and will orbit every 37 hours, varying in distance from the Earth between 350km and 98,000km. Total weight at launch was 278kg.

## CEMA to represent Motorola Semiconductors

CEMA Distributors Pty Ltd has announced appointment as a franchised distributor for Motorola Semiconductor products throughout Australia. The agreement, effective from November 1st, 1975, was signed by the General Manager of CEMA Distributors, Mr Ray Adams.

The agreement with Motorola follows the take-over of CEMA by J. S. H. International Inc, a large components distributor in the US. Bryen Tanner will lead Motorola products marketing.


## Cheap microwave leak detectors

The CSIRO National Measurement Laboratory, Sydney University, has developed several cheap microwave detectors intended for checking microwave ovens. Microwave ovens may leak dangerous amounts of radiation due to deterioration after long use or after being damaged. Such leakage, for example, could cause permanent eye injury after prolonged exposure.

In one of the detectors developed, a small lamp bulb is the major component. When connected to an aerial—two short lengths of wire—the globe glows brightly when it encounters power levels of 5 milliwatts per square centimetre, a figure generally accepted as the maximum safe level.

The globe itself differs from ordinary torch bulbs in that it uses a special low-inductance filament, achieved by winding the filament into a helix of very small radius. This allows sufficient current to flow to light the lamp at low power levels.

In a second type of leakage detector, the aerial is connected to a hot-carrier

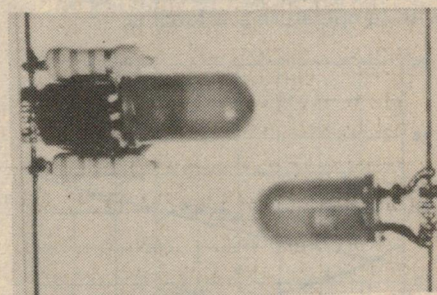

diode which causes a LED to glow whenever power leakage is detected. However, this device and the one mentioned previously, will also produce a dull glow at power levels below the maximum safe level. To avoid confusion, therefore, two additional monitors have been designed in which the light switches on abruptly whenever the safe level of radiation is exceeded.

All these detectors are very cheap to build, the components costing between 60 cents and 2 dollars. They are intended for both domestic and commercial oven users and should answer the needs of technicians who install and service microwave ovens but cannot afford existing radiation monitors costing over \$1,000.



# LOGIC DESIGNERS

**For less money, you can now design 2mW per gate digital systems that operate at twice the speed possible using standard TTL.**

With Fairchild 9LS low power Schottky TTL circuits, logic designers can now create 2mW-per-gate digital systems that operate at twice the speed possible using standard speed TTL devices. System design is simplified because of low power requirements, reduced heating and low noise operation. This new TTL family operates at gate delays of only 5 ns typical, 10 ns worst case, which is twice the speed of standard 54/74 or 54LS/74LS low power Schottky TTL devices.

The speed/power performance allows the 9LS circuits to replace standard TTL, high speed TTL, low power Schottky (including 54LS/74LS) and some standard Schottky TTL parts with a power savings of 500 to 1000%.

The economies of 9LS do not end with component cost. Figures 1 & 2 illustrate the greater ac stability of 9LS with temperature and loading.

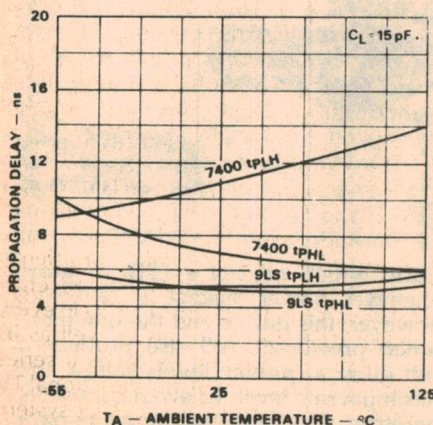


Figure 1

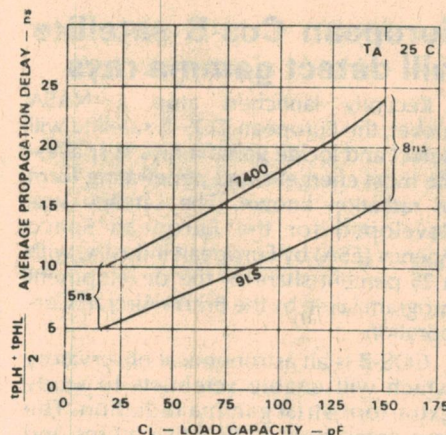


Figure 2

This translates into easier design and fewer problems in the field. The fan-out of LS is 20 into other LS circuits, which means fewer added components for buffers. Schottky gates, used as clock or bus drivers have fanouts of 50 into LS resulting in component savings as well as fewer clock skew problems. LS is fully compatible with Fairchild 34000, RCA 4000B or National 74C CMOS. It can go to and from CMOS without external components. Interface with other MOS devices are also simplified; MOS typically exhibits a fanout of four LS loads.

- **Low Power** — Next to CMOS the lowest of any modern logic family. In fact, it's lower than CMOS at frequencies of 2 MHz and above.
- **Low cost** — Apart from saving on components, Fairchild 9LS in most instances costs less than standard TTL.

- **High Performance** — the best speed this side of standard Schottky. It's faster than H series at 1/10 the power.
- **Good Temperature performance** — The ac characteristics of our 9LS/54LS are extremely stable with temperature.
- **High Capacitance Drive Capability** — Actually superior to standard power TTL.
- **Compatibility** — 9LS/54LS is directly compatible with all TTL families and modern CMOS families such as 34000, CD4000B and 74C. Fairchild 9LS meets all 54LS/74LS for second sourcing.

## Fairchild 9LS

9LS00	Quad 2-Input NAND Gate
9LS02	Quad 2-NOR Gate
9LS03	Quad 2-NAND Gate (O/C)
9LS04	Hex Inverter
9LS05	Hex Inverter (O/C)
9LS10	Triple 3-NAND Gate
9LS11	Triple 3-NAND Gate (O/C)
9LS15	Triple 3-AND Gate (O/C)
9LS20	Dual 4-NAND Gate
9LS22	Dual 4-NAND Gate (O/C)
9LS32	Quad 2-OR Gate
9LS51	Dual AND-OR Invert Gate
9LS74	Dual D Flip-Flop
9LS86	Quad Exclusive OR Gate
9LS109	Dual JK Edge Trigg. Flip-Flop
9LS112	Dual JK Edge Trigg. Flip-Flop
9LS113	Dual Edge Trigg. Flip-Flop
9LS114	Dual JK Edge Trigg. Flip-Flop
9LS136	Quad Exclusive OR (O/C)

## And 9LS/MSI

9LS138	1-of-8 Dec/Demultiplexer
9LS153	Dual 4-Input Multiplexer
9LS174	Hex D Flip-Flop W/Clear
9LS175	Quad D Flip-Flop W/Clear
9LS196	Decade Counter
9LS197	4-Bit Binary Counter
9LS253	Dual 4-Input Multiplexer 3-S

**FROM YOUR FAIRCHILD DISTRIBUTOR**


N.S.W.—George Brown 519 5855, Warburton Franki 648 1711; Victoria—Browntronic 419 3986, Warburton Franki 69 0151; S.A.—Gerard & Goodman 223 2222, Warburton Franki 356 7333; Queensland—Warburton Franki 52 7255; A.C.T.—George Brown 95 0455; W.A.—Warburton Franki 65 7000; New Zealand—Tee Vee Radio, Auckland 76 3064, Wellington 6 0532, Dunedin 8 8028, Christchurch 6 7748.

**FAIRCHILD**  
AUSTRALIA PTY. LTD.



## NEWS HIGHLIGHTS

### World's largest hydro-electric generator

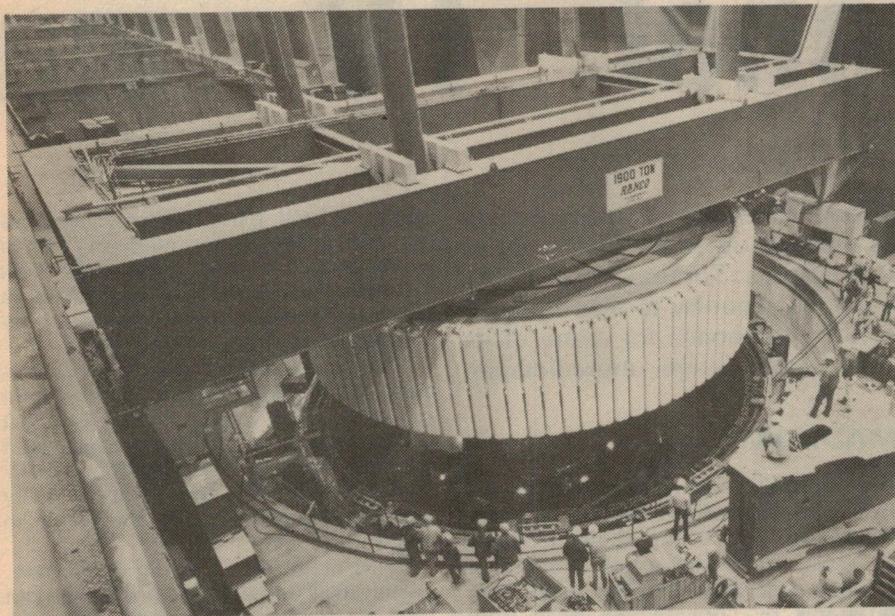

Workmen look on as the 1,800 ton rotor for the world's largest hydro-electric generator is lowered onto the 8ft diameter shaft that will connect it to the hydro-turbine. A specially designed crane was required to move the 60ft diameter rotor from its assembly area nearly  $\frac{1}{4}$  mile away. Scheduled for operation last August, the generator is the first of three 600,000kW units to be built by Westinghouse Electric Corporation in East Pittsburgh for a Bureau of Reclamation power plant at Grand Coulee Dam, Washington state.

### Australia's first general purpose mini

The first free-standing, commercially available general purpose minicomputer to be designed and manufactured in Australia has recently been announced by Computer Manufacturers (Australia) Pty Ltd of Sydney. According to CM(A) ... "Australia can no longer afford to be completely dependent on overseas technological sources for all the necessary elements of data communication and information processing systems."

Designated the CM-202, the Australian mini is said to compare favourably on a price/performance basis with major imported alternatives. Technically, it is claimed to satisfy Australian Government requirements (as expressed in current Australian Government tender specifications for minicomputers for the period 1975 to 1980) in terms of storage capacity and expandability, processing speed, and the ability to operate with all accepted forms of input and output devices.

In hardware terms, the CM-202 is a general purpose 16-bit digital computer with memory expandable in 16k word increments to a maximum of 64k words. Standard processor features include double precision arithmetic, hardware



CM(A)'s Charles Amy with the new mini.

multiply/divide, memory and DMA channel polarity, direct memory access channels, and a vectored priority interrupt system. The basic chassis contains the central processing unit (CPU) together with up to 32k words of memory, three integral peripheral controllers and three spare I/O slots.

A full range of peripheral and control equipment is available with the CM-202. These include fixed and moving disc heads, tape units (including cassette), communications line controllers, VDUs, printers, paper tape equipment, console teletypewriters and analog to digital converters.

### Another video disc system . . . this one from Hitachi

With one video disc system already on the market in Europe, and the two principal contenders in the video disc stakes, Philips/MCA and RCA, ready to do battle in the US, the Japanese company Hitachi has suddenly got into the act with a system of its own. The new system, developed at Hitachi's Central Research Laboratory in Tokyo, uses an optical holographic approach and is said to provide 30 minutes of colour television from a 30cm disc.

The disc contains 54,000 holograms, each storing luminance, chrominance and sound information superimposed in an area that's only 1mm in diameter. This storage density is so high, that the speed of revolution required is only 6rpm. The two other optical video disc systems, one developed by Philips and MCA Dico-Vision and the other by Zenith Radio Corporation and Thomson CSF, use 1,800 revolutions per minute. Same goes for the RCA system, which uses capacitive pickup.

Hitachi has yet to announce whether it will market the system. However, at first sight it appears to be a promising new contender because of the low speed revolution required. This could greatly reduce the cost and complexity (if not eliminate) the expensive servo systems used in previous video players. The light source used is presumably a low-power laser.

### Wentworth Hotel installs cable TV system

Receiving a good colour TV signal amongst the high rise buildings of central Sydney poses many problems. In the case of an international standard hotel, where guests expect the best, a good reception is especially important.

The Wentworth Hotel, faced with reflective problems from certain nearby office blocks, last year commissioned AWA Rediffusion Pty Ltd to carry out a survey on colour TV reception problems.

As a result, the hotel has recently installed AWA 18" colour TV sets in every one of its 400 plus rooms as well as its own cable TV system fed from a series of specially installed highly directional TV aerials on the hotel roof. The system pipes colour TV to every guest suite and can be readily adapted to supply an additional closed circuit channel for entertainment or conference requirements.

The sets and the system were supplied and installed by AWA Rediffusion Pty Ltd—a specialist cable TV joint venture company formed by two of Australia's and Europe's largest communications companies, Amalgamated Wireless (Australasia) Limited and Rediffusion Limited.



*India's schoolroom in the sky . . .*

# Educational TV via

India's long-awaited Satellite Instructional Television Experiment got underway last August, with programs beamed up to a NASA satellite and relayed back direct to some 2,400 villages. Though much of the programming is educational, India is the first country to distribute TV to its backward hinterland before providing a service for many of its big cities. What the social impact will be is, at this stage, unpredictable.

by **BRENDA MADDOX**

The need for anticipating the social impact of new methods of communicating has never been so great—and neither has the temptation to label any kind of communications project an “experiment.” Last week, India began its long-awaited Satellite Instructional Television Experiment (SITE). Its objectives are pretty diffuse: “to gain experience in managing a satellite-based educational television system in rural areas; to stimulate national development; and to demonstrate the potential value of satellite technology in the rapid development of effective mass communications in developing countries.” There is also the more specific goal of trying to teach—via satellite—birth control, agriculture, education and nutrition, as well as to train teachers.

For one year the Indian Space Research Organisation (ISRO) will use

the National Aeronautics and Space Administration's ATS-6 satellite to beam television direct into 2,400 isolated villages. About an equal number of villages will receive the television programs by conventional relay from satellite receiving stations in Ahmedabad, Delhi and Amritsar.

The ATS-6 is claimed to be the world's largest communications satellite. Launched last year, it has a 30ft parabolic antenna and 470 watts of power. NASA is making no charge for lending the satellite, which itself cost \$US200 million, but the entire cost of the project on the ground—from equipping the villages for direct reception to making the instructional programs—is being borne by India. It is estimated at about £6 million.

The excitement which SITE, even in gestation, has stirred up internationally concerns the direct reception from the



satellite. Each participating village has received a 10ft antenna made of chicken mesh, and a 24 inch solid state television set which has been “augmented” by a front-end converter. The antenna is connected to the set by a 50ft cable.

For villages where there is no electricity the equipment also includes a set of two 12-volt heavy duty batteries. Most of the villages in SITE have been given a simple form of electrification, usually a line run from the agricultural electricity supply in the fields outside the village, in order to power the set.

With no more than this hardware, costing in all perhaps £350, the village can tune into the satellite, even though it may have been untouched by any other form of modern technology, except the transistor radio and the jeep which brought the SITE installation team.

The villages chosen for SITE lie in six clusters in the states of Rajasthan, Bihar, Orissa, Madhya Pradesh, Andhra Pradesh and Karnataka. Each cluster has a headquarters which has the responsibility for keeping all the sets in running order. There are four jeeps assigned to each cluster, each jeep providing service for 100 villages.

In each village a custodian has been hired to look after the television set, to switch it on and off, and to count the size

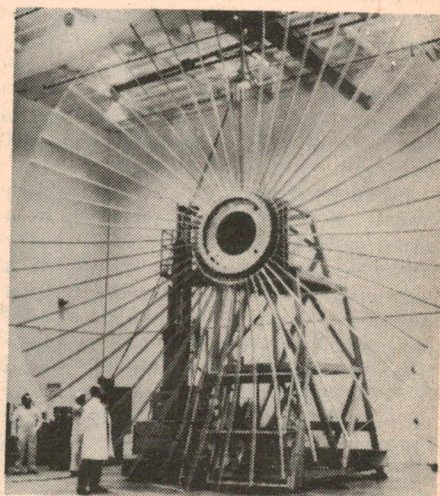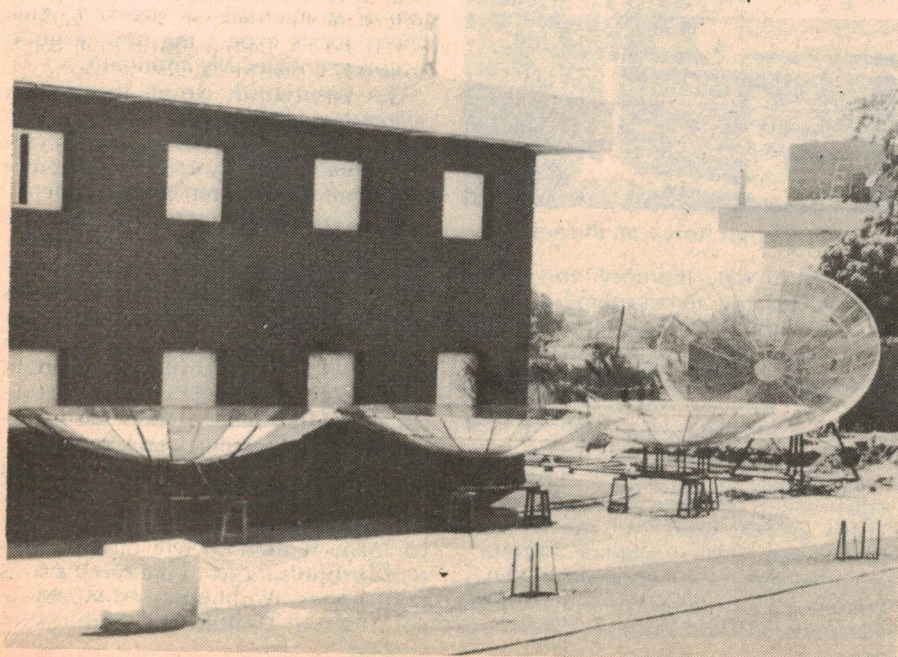

Above: a view of the 30ft parabolic dish antenna as used on NASA's ATS-6 satellite. At left is a line of 10ft antennas, shown here at Ahmedabad headquarters, of the type used at each participating village.



# a satellite


of the audience at each viewing session. If the set breaks down, he checks the faults illustrated on a postcard (no sound, no picture, neither sound nor picture, or a conspicuous electrical power failure) and posts it to the cluster headquarters. (Thus the successful performance of the world's largest communications satellite depends on the efficiency of the Indian postal service.)

Every day in the early evening, each village will get a television program in its own language made up of local news, entertainment and instruction. All-India Radio, which has prepared the program material, has tried to use only indigenous ingredients: folk music, local storytellers and ballad singers for the entertainment, farmers and housewives with their ordinary appliances and tools for the instruction. The lessons are simple and informal—how to prevent rickets in babies by feeding them solid food, how to measure with the knuckles how far apart the rice plants should go, how to make a little superphosphate go a long way.

After its local program, the village will get a half hour program from Delhi. It will carry national news and be in standard Hindi. Then the villages will be able to watch the programs directed at villages in another cluster, whose language they may be able to understand. In the mornings, there will be special programs for children in schools.

Professor E. V. Chitnis, manager of SITE, calmly anticipates the obvious question from critics. "Many people ask us whether it would be better to provide tube wells and drinking water instead of TV sets," he says. "However, what one is attempting to do through SITE is not to give TV sets to villages, but to make people self-reliant and to get them new information which will enable them to do something worthwhile for themselves—to learn to work together and acquire new skills, including those required for digging wells."

One of the fascinations of SITE is that India has so little television of any sort. There has been a television service, by All-India Radio, in Delhi for about 12 years, and two years ago it was extended to Bombay. The service has also been made available in the northern cities of Srinagar and Amritsar, where people were buying television sets in order to

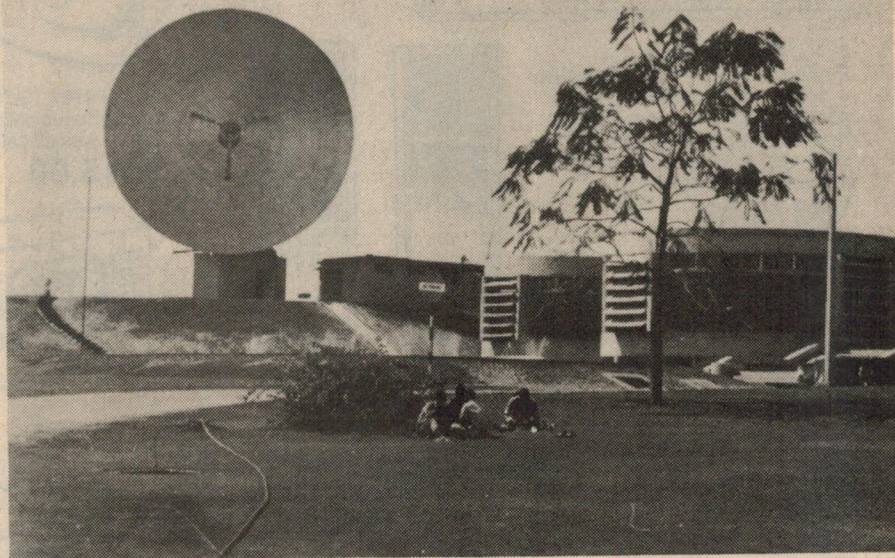

*View showing the prime Earth station at Ahmedabad which will transmit signals to the satellite for Project SITE. Great stress in the SITE programming has been placed on indigenous culture, both for entertainment and for instruction.*

watch television "wafting" in from Pakistan. But Calcutta and Madras are still without a television service. What SITE is doing is to bring television to about 2.5 million people in the hinterland before the major metropolitan populations enjoy it, or before a full urban television service has been developed. India is probably the first country in the world to be able to introduce television in this way.

For its part, NASA is keeping a very low profile in Ahmedabad where SITE's headquarters are. Yet the relationship between the two space agencies is close and friendly. NASA's people tell with astonishment about watching Indian engineers from Project SITE set up an antenna when they went on a training visit to Goddard Space Center in the United States. They acted as if they were in India, a NASA man said. They dug a hole in the ground, got the Sun angle, the time of day, a fix on true north—and set up the antenna. "It was pointed exactly at the satellite," the NASA man said admiringly. "We couldn't improve on the position at all." NASA could never operate like that. "We'd have to dig a three foot trench and line it with concrete first," said the US official.

The very existence of Project SITE is evidence of the close relationship between NASA and the late Dr Vikram Sarabhai, who was head of the Indian

Atomic Energy Agency in the 1960s (which then included space activities). NASA recognised that its then projected ATS-6 satellite would have a broadcast capability and Sarabhai recognised that India, with its million scattered villages could well utilise satellite broadcasting as a means of ending village isolation.

The decision to go ahead with Project SITE was made formal in a memorandum of understanding between the United States and India in 1969. SITE was to have begun in 1973, but the launching of the ATS-6 was delayed because of budgetary troubles on NASA's side. The Indians were grateful for the delay because organising the project, getting the hardware, recruiting the staff and cutting through the bureaucratic tangle at local, state and national levels of government was a formidable job—quite apart from the difficulties of preparing something to be shown on the television screens.

Then, in late 1971, Sarabhai suddenly died. His place as head of the Indian Space Applications Centre at Ahmedabad (the home city of the distinguished Sarabhai family) was taken by Professor Yash Pal, a theoretical physicist from the Tat Institute in Bombay. According to NASA officials, Pal is extremely impressive, and it is reckoned to have been his leadership that enabled SITE—against many bets—to begin on time.






# SAVE ON OUR STOCK CLEARANCE



1. 100 Watt Clubsound P.A. System consisting 100 W Amp with 4 inputs separate bass and treble control on each channel—built in reverbation—plus 2 sound columns each containing 3 wide range 12 inch speakers.

**\*\$575.00**



2. 120 W P.A. Amplifier 2 input separate bass and treble controls on each channel overload protected Type LBH 1010.




**\*\$230.00**

3. 60 W Power amplifier ideal for extending a system Type LBH 1007 (same cabinet as LBH 1010).

**\*\$126.50**

4. 60 W P.A. Amplifier 2 inputs separate bass and treble controls on each channel overload protected Type LBH 1008.

**\*\$184.00**




5. EV 4572 Sound column speaker containing 4 wide range 8 inch speakers power 20 Watts.

**\*\$103.50**


6. VN 1110/00S Wall mounting speaker enclosure containing 8 inch twin coned speaker and tapped transformer.

**\$29.00**



7. HR 3 Super Tweeter 35 Watts, Frequency 2 kHz to 17.5 kHz.

**\$50.00**




8. APC 30T Wide Angle 30 Watt Reflex Horn with Driver and tapped transformer.

**\*\$92.00**


9. AP 30T 30 Watt Reflex Horn complete with driver and tapped transformer—screw driver adjustment.

**\*\$62.00**




10. WR10T 10 Watt Horn suitable for music complete with tapped transformers.

**\$44.00**



11. EV 4707 10 Channel intercommunication master station with all-call facility.

**\$115.00**




12. EV 4708 Remote Station for above.

**\$13.50**


13. PYE LDM 0826/07—22 inch PAL colour monitors video and audio input (No R. F. front end). Cabinet may need touch up. Price does not include insurance or freight. Both payable to carrier.

**\$500.00**



14. N2209 Cassette recorder suitable for music, dictation etc, supplied with LFD 3442 Adaptor which provides capability to synchronise cassette sound to most automatic slide projectors (those which are provided with a connection for remote control in accordance with DIN Standard 45523).

**\$68.85 complete**



15. LCH 0007/01 Stereo dynamic headphones 30 Hz to 20 kHz 600 OHM (300 OHM Parallel) feather-light shock resistant, intended for high quality monitoring of speech or music. Mono to stereo change effected by altering contact connections in 6 Pin plug.

**\$19.00**

\*For these items add \$5.00 Freight each  
ALL PRICES INCLUDE SALES TAX.

To: Philips Vision & Sound,  
P.O. Box 504, Clayton, Victoria, 3168.

Please forward the following items by return post.

Item Numbers \_\_\_\_\_

Enclosed is my cheque / money order \$ \_\_\_\_\_

Name \_\_\_\_\_

Address \_\_\_\_\_

Postcode \_\_\_\_\_

38.2554

## PHILIPS



## Educational TV


Though SITE's overall objectives may turn out to be unassessable, the project has nevertheless been organised so that some measurements on the impact of television on village life can be made. There is, for instance, a social science team, including nine anthropologists, and teams of researchers who will either live in or visit the villages participating in the project. They have already conducted censuses in the villages to find out what the beliefs and practices on matters such as family planning and agriculture were, and also to ask the villagers what they thought they needed in the way of help.

The social scientists have posed some interesting questions for themselves. These include the primary one that everyone will want to know when the year is up: did television actually teach? Other questions to be answered include: how has television changed the channels of communication in the village; do small social groups of, say, teenagers or old men still meet in the same way; have their times of meeting altered to accommodate the evening television viewing? Individual research scientists will also conduct in-depth studies on the changes wrought by television on village leadership patterns. Will the custodians of the TV sets become leaders? Is the change in social behaviour (if any) that follows the introduction of television a function of social class?

One charge that can be levelled against SITE is that its research is result-oriented. They are looking for something called "change" and will probably find it. But what brought change about? It is possible that the villagers may learn to be less fatalistic about their environment — perhaps not as a result of what they see on the television screen, but from watching a repairman mend the set. Another change is that the school broadcasts will be aimed at too wide an age span (five to eight year olds, nine to eleven year olds) and that there will be too many children in the room (150 is not impossible) for the television to be heard.

It is a great pity that SITE, so long in preparation, should follow close on the heels of the imposition of press censorship in India. For years critics of satellite broadcasting direct to rural populations have argued that it would merely put an instrument of control in the hands of a government trying for a single-party state. Their arguments now have some justification. The daily half hour news from Delhi will, in the light of recent events, be even more stilted than it would otherwise have been.

Those connected with SITE tend to feel that it has succeeded already, simply by becoming a reality. To have managed to get the hardware into 2,400 villages in

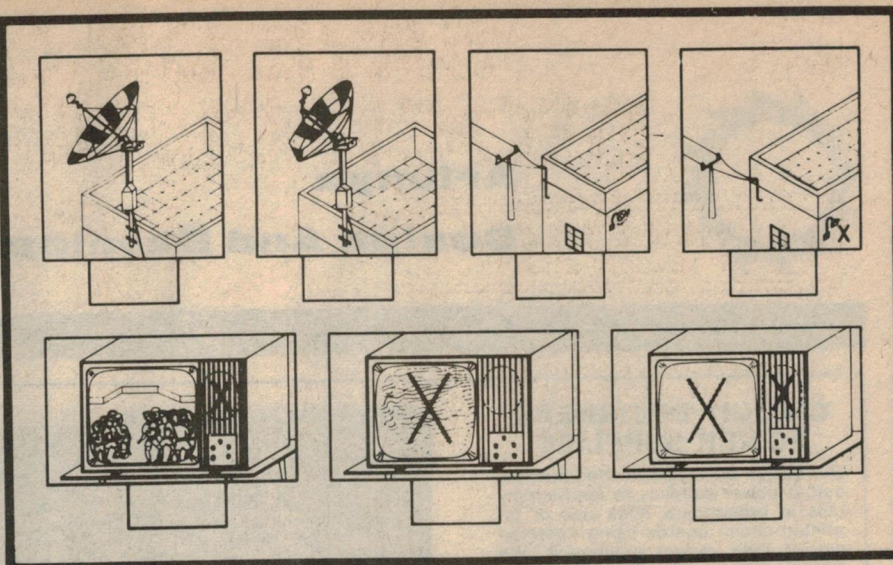

In order to get a repairman when the village TV set does not work, the village custodian checks the appropriate boxes on a postcard. These show, left to right top row: antenna OK, antenna damaged, power supply OK, power supply damaged; bottom row, left to right: no sound, no picture, no sound and no picture.

time for the arrival of the satellite (now stationed at longitude 35°E) before the monsoon rains was no small feat. What mistakes have been made in programming can be corrected in years to come, for the villages chosen for SITE are also reachable by terrestrial microwave.

In any event, like Brazil and Indonesia India is committed to going to a full national satellite system. In India there is

no question of building a full internal microwave network: satellites are going to be used, and what the Indians themselves are asking for from SITE is not so much experimental results but simply experience.

\*Brenda Maddox is a freelance journalist and author. This article first appeared in "New Scientist," and is reprinted by arrangement.

## Greyscale/Convergence Generator

Features ★ CROSSHATCH ★ DOTS ★ VERT. & HOR. LINES ★ VERT. BARS ★ GREYSCALE (8 Step) ★ WHITE SCREEN ★ BLACK SCREEN ★ VHF OUTPUT (Tunable) ★ HOR. & VERT. SYNC. & BLKG. ★ PORTABLE MAINS/BATTERY OPERATION ★ HIGH STABILITY & RELIABILITY ★ LOW PRICE

**ONLY \$110.00 plus 15% S.T.**

# PAL

## COLOUR BAR GENERATOR PUSH BUTTON MODEL COLROSE PBC III

- ★ Provides the THREE COLOUR BAR STANDARDS as used in Australia (100% Amp 100% SAT., 100% Amp 95% SAT., 75% Amp 100% SAT.)
- ★ Provides the THREE ASSOCIATED GREYSCALE PATTERNS.
- ★ Accurately Centred CROSSHATCH pattern for easy adjustment of picture height, width and linearity.


Other features include ★ DOTS ★ VERT. & HOR. LINES ★ VERT. BARS ★ RED SCREEN ★ WHITE SCREEN ★ PAL/NTSC COLOUR BARS ★ VARIABLE BURST AMPLITUDE ★ VARIABLE VIDEO OUTPUT — pos. or neg. polarity ★ VHF OUTPUT — tunable ★ SOUND CARRIER — mod. (1kHz) or unmod. ★ CANCEL Y(Luminance) U(B-Y) & V(R-Y) switches ★ C.R.O. Sync. Socket.

**STILL ONLY \$350.00 plus 15% S.T.**

## COLROSE ELECTRONICS

13 Freda Street, Netley, S.A. 5037 — Phone 293 5617





**Arlunya**



## Design And Development Aids

### CIRCUIT DESIGNERS POWER SUPPLIES

Our design engineers needed multiple output power supplies to feed supply rails in breadboard hook ups or on printed circuit boards being operated out of their parent equipment. We could not buy cost effective commercial units, so we made them ourselves. Soon customers were pressing us to build some for them. As a result we put PS101 and PS105 into production.

#### FEATURES:

- Low cost — straightforward design
- Light weight rugged construction
- Provide rail voltages most commonly required for circuit development or troubleshooting
- Limited voltage range on fixed outputs minimises chance of costly setting up errors or accidental switching in of high voltages
- Cost effective: avoids tying up expensive wide range bulky lab. supplies on most straightforward rail voltage applications
- Ideal for general bench use in development labs, service workshops and educational institutions.

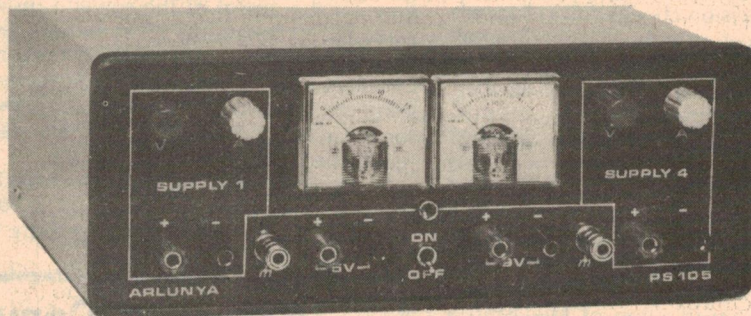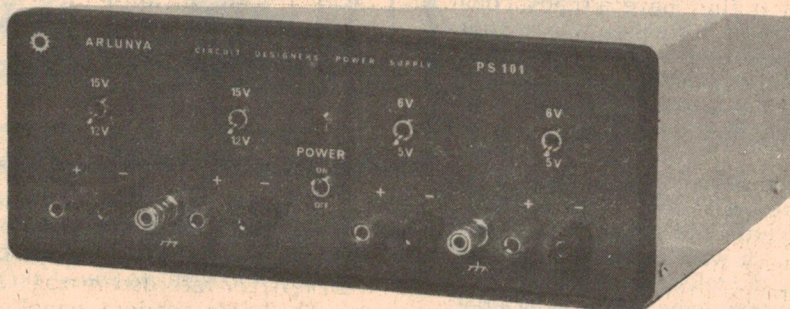

### EXPERIMENTAL CHASSIS EC10

#### A RELIABLE METHOD OF CIRCUIT BREADBOARD ASSEMBLY

Our design engineers wanted a reliable means of breadboarding without the limitations of most matrix type boards or the costly alternative of producing special to purpose P.C.B.'s for initial hookups. We could not find any suitable product that was commercially available so we designed and built our own.

The basic EC10 is a large (310mm x 250mm) high quality fibre glass printed circuit board which mounts on a heavy gauge anodised main chassis.

**IDEAL FOR DEVELOPMENT DEPARTMENTS, UNIVERSITY & TECHNICAL COLLEGES, EXPERIMENTERS.**

#### FEATURES:

**CHASSIS** A rigid welded corner anodised aluminium base to provide an adequate space between the circuit board and the bench for wire interconnections.


**EXTENSIVE PRE PUNCHING AND DRILLING FOR SOCKETS, BINDING POSTS, SWITCHES, POTS, ETC. ETC.** An assortment of holes, slots and cut-outs suitable for mounting most popular types of plugs, edge connectors, switches, potentiometers, etc.

**EARTH PLAIN** The P.C.B. is laid out to provide a large earth-plain.

**SUPPLY RAILS** Positive and negative rails with pins near each I.C. socket.

**IN LINE I.C. SOCKETS** I.C. sockets mounted on the underside of the board to allow interference-free mounting of discrete circuit components on the top of the board.

**PRINTED CIRCUIT BOARD** Epoxy-glass circuit board and high quality 16-pin DIP sockets.

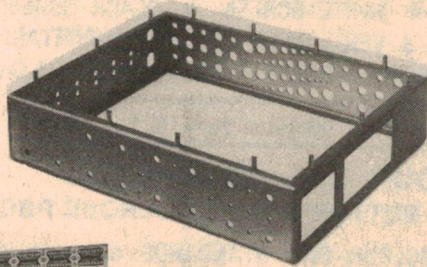

SEND THIS COUPON OR WRITE TO

**ARLUNYA PTY. LTD.**

P.O. BOX 113 BALWYN, VICTORIA 3103 AUST

TEL (03) 836 6533 TELEGRAMS ARLUNYA, MELB

Please send me details of your circuit designers power supplies and experimental chassis.

NAME .....

ADDRESS .....

.....POST CODE.....



# New machine for the blind

## ... for reading, writing and arithmetic

Electronics is often represented as an austere discipline, concerned only with profit making and remote from the problems of the individual. However, there is probably no other technology that will do more for the physically handicapped in the immediate future than electronics. Electronics is very much concerned with the "people business," as this story shows.

Life for the blind may be considerably improved in the future, thanks to developing electronic technology. In recent years a number of important new inventions have made an appearance, and these range from ultrasonic and microwave guidance devices to machines that facilitate the handling and manipulation of data.

In France, an ingenious new machine has been developed and was presented for the first time at the International Congress for the 150th Anniversary of the Invention of the Braille System, held at UNESCO headquarters in Paris last May.

The Digicassette, as the machine is known, will make it a lot easier for the blind to read and write, and to perform complex calculations. Interestingly enough, it was developed by a team of blind inventors working for the Valentin Haüy Association in Paris. Mr Schneider-Manoury, one of the inventors and Secretary-General of the Association, demonstrated how the machine works.

In appearance, the Digicassette looks like a small cassette recorder and, indeed, retains the essential functions of a tape recorder. Data is entered into the machine by means of a keyboard equipped with ten keys, and recorded on magnetic tape. A Braille readout panel consisting of some twelve characters is used to display data, either as it is written or read off the tape.


In fact the Braille readout panel is the key to the whole system, although technical details to hand on its workings are quite sketchy. However, it would appear that as data is read off the magnetic tape it is fed to suitable encoding circuitry. This, in turn, drives a number of solenoids which raise pins in Braille formation on the data panel. A technique similar to this was developed at the Electronics Division of the School of Mathematics and Earth Sciences, Macquarie University, for adapting electronic calculators to Braille readout.

The main advantage of the Digicas-

sette system is its versatility, and the ease with which data may be entered, updated, and re-called. The cassettes used to store the data are the same as those used in conventional audio cassette recorders, and can store up to 150,000 Braille characters. Space requirements are thus drastically reduced and ease of handling considerably improved with this format, as compared to the conventional Braille texts.

In addition to its reading and writing capabilities, the Digicassette can be interfaced with an electronic calculator. Set up in this manner, data readout from the calculator can be reproduced in Braille. This is obviously an important extension of the machine's capabilities, and places the computing power of the modern electronic calculator within reach of the blind.

One area where the Digicassette format will obviously be of tremendous value is in providing new employment opportunities for the blind, and in teaching applications. The machine will increase the level of self-reliance and independence enjoyed by blind people and, as such, has considerable social merit. Current plans call for the Digicassette to be mass produced in the near future.

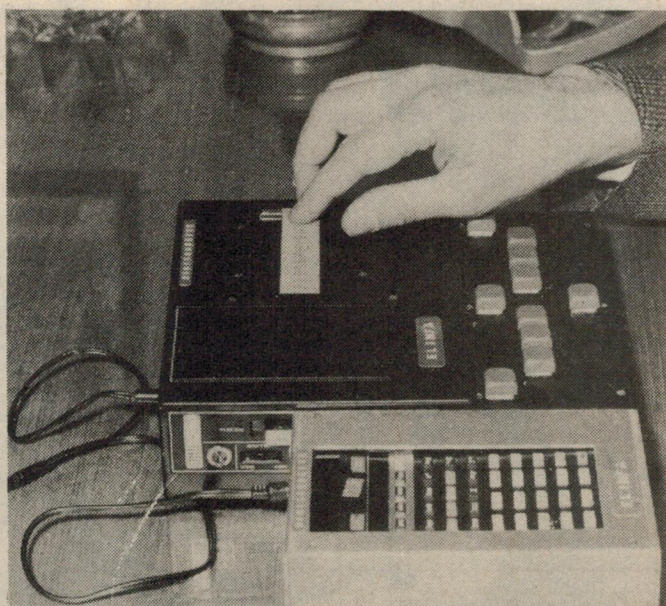

At left, Mr Schneider-Manoury demonstrates the Digicassette system. View at top clearly shows the Braille readout panel, and the calculator adapted for use with the Digicassette.



# Computer system monitors racing car performance


Winning races like the Indianapolis 500 in the future will require a combination of several important factors: a skilled professional driver, a good pit crew, a carefully prepared racing car and—by the way things are shaping up—a computer! Team McLaren, one of the world's most successful automobile racing teams, are already using a computer for pre-race tuning and in-race performance monitoring of their cars.

The modern racing car has changed dramatically in recent years. Engines have changed, suspensions have changed, and the aerodynamic shape has changed. But one thing remains the same—the meticulous pre-race preparation that must be carried out on a car in order to ensure the reliability that wins races.

In the fiercely competitive world of motor racing, therefore, any one factor that will help improve reliability and perhaps provide some sort of "edge" is welcome.


In the case of Team McLaren, this "edge" is a small computer tucked in a corner of the pit area. The computer, a Nova 2 made by Data General Corporation of Southboro, Massachusetts, USA, is used for real-time performance moni-

At right, racing driver Johnny Rutherford at the wheel of the Gatorade-McLaren USAC racing car. (Photo Roger L. Smith, USA.) View below shows the computerised monitoring system mounted in Team McLaren's engine test area.

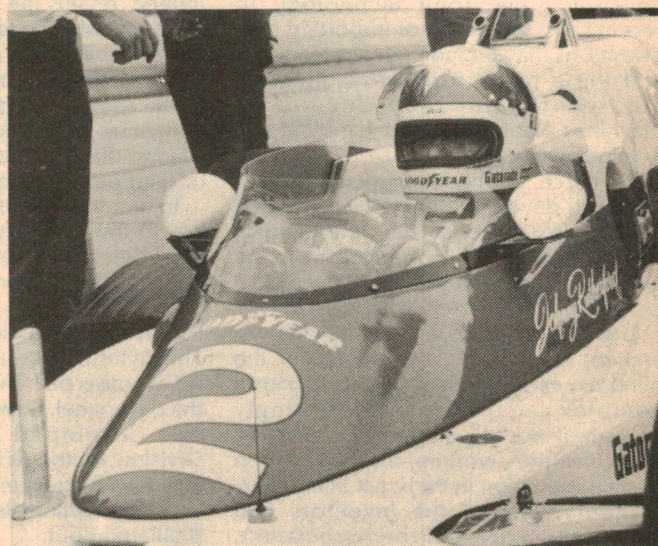

toring of the Gatorade-McLaren USAC racing car.

Performance monitoring is achieved by the use of sensors in the car's engine while other sensors are used to monitor vehicle handling characteristics. A small telemetry transmitter in the car receives

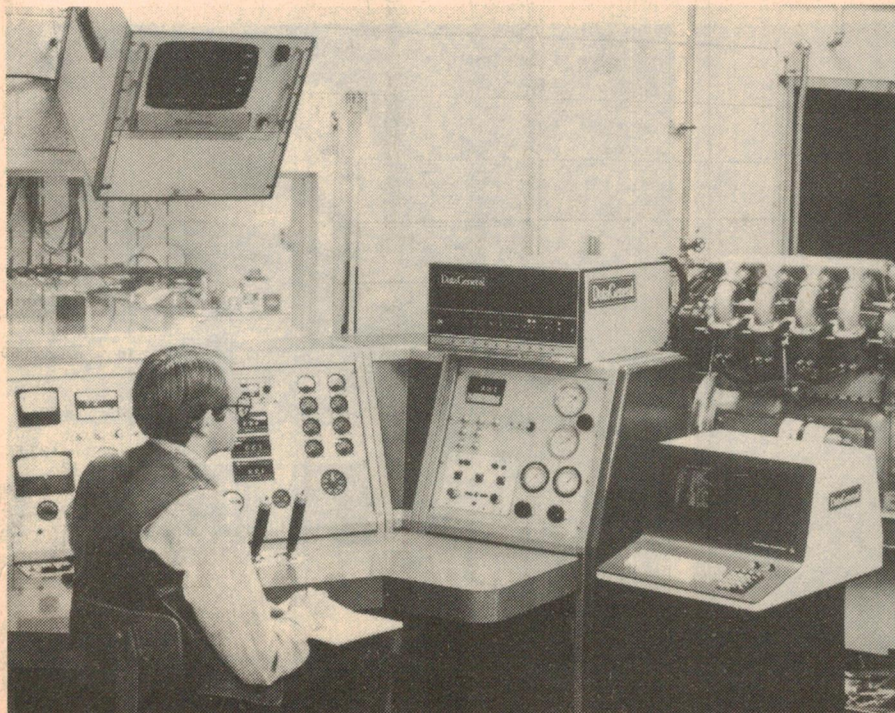

data from the sensors in the form of electrical impulses, multiplexes the data into a common communications channel, and transmits it to a receiver in the pit area. The data is then fed into the computer for processing.

"The car has 14 of its functions monitored", said Mr Tyler Alexander, Team McLaren's Director of Engineering.

"The computer monitors the ride height of each of the four wheels, the forward and sideward acceleration, the oil and water temperature, oil and water pressure, air inlet temperature, engine RPM, turbocharger airflow, and fuel flow," Mr Alexander said. Some of these measurements are used for pre-race preparations, while others are used for real-time performance monitoring during the race.

Readings such as wheel riding height and forward and lateral acceleration are of primary importance during pre-race tuning. During practice runs the driver's reactions, together with the data provided, can be used to make suspension and airfoil adjustments to provide a car whose handling meets the requirements



of the driver and the track.

Of particular importance is the fact that the computerised system can keep track of fuel consumption as the race progresses. This is obviously a vital factor in overall race strategy and, according to Mr Alexander, "there previously was no way to measure the amount of fuel in the car."

This is because the fuel cells in racing cars contain a sponge-like safety material that prevents the fuel content from being monitored. During a race, therefore, it was previously possible only to estimate the amount of fuel left at any given stage. These estimates were made on the basis of previous performance.

To overcome this problem a small, propeller-like flowmeter inserted in the fuel line now monitors the amount of fuel that goes into the engine. Flowmeter revolutions are monitored by a sensor and the information relayed to the computer which calculates the fuel consumption. "This will avoid calling a car in for an unnecessary refuelling, or prevent a car from running out of fuel because its consumption was higher than estimated," Mr Alexander said.

As mentioned above, several readings will be useful mainly for real-time performance monitoring during a race. For example, although acceleration figures are primarily used for pre-race tuning, an increase in lateral acceleration during the race could mean that the tyres are not adhering to the track as well as they should. Race strategy would then dictate that the tyres be changed during the next pit stop.

"Oil temperature is another measurement that can play a role in determining race strategy," Mr Alexander said. "If we see the oil temperature rising it could mean increased friction in the engine, which is an indication that a part is failing. Depending on the degree of increase, the position of the car, and how far along the race is, we can tell the driver to continue at full speed, slow down enough to maintain his position, or call him into the pits before the engine is damaged."

The computer also counts the number of laps the car has made by counting the number of signal peaks as the car goes by. In addition, the lap time is calculated by counting the interval between signal peaks.

Information calculated by the computer can be displayed either on a video display unit, or can be printed out at a teletype terminal to provide a permanent record. The information displayed on the VDU can never be more than one second old.

In addition to supplying the computer, video display unit, and the teletypewriter, Data General Corporation wrote the programs that transform the telemetry data into standard units of measurements, and which make all necessary calculations. The 14-channel data acquisition and telemetry system was supplied by EMR-Telemetry, Florida, USA.

# FM

## which tuner is best?

**The Australian Consumers' Association has tested 13 FM tuners priced under \$200. The full findings are published in a comprehensive report in the November issue of CHOICE magazine.**

ACA is a wholly independent, non-political, non-profit organisation. Subscription of \$10 per year brings you CHOICE each month and the right to purchase back copies at a nominal charge.

# CHOICE

ACA, 28-30 Queen St., Chippendale, N.S.W. 2008.  
Phone 69-5447 (Sydney).

I enclose \$10 to join ACA and receive CHOICE for a year.

NAME .....

ADDRESS .....

POSTCODE .....



000274



# Loudspeaker Protector

by LEO SIMPSON

ELECTRONICS Australia, November, 1975



incestuous triple which monitors the amplifier outputs for DC fault conditions. They function as follows:

Both channels of the amplifier in question are monitored by Tr1, 2, 3 via a low-pass filter consisting of four 22k resistors and two 50uF capacitors. In a typical amplifier with direct-coupled output there is a normal "offset" DC voltage at the output which may be anywhere from about 20 millivolts to perhaps 200 to 300 millivolts. These normal offsets must not affect the monitoring network.

## PARTS LIST

- 1 case and lid
- 1 PC board, 102 x 51 mm, code 75L11
- 1 PC board bracket (see text)
- 1 flush-mounting mains socket
- 1 three-pin mains plug
- 1 power transformer, 12.6V secondary
- 1SPST toggle switch
- 2 four-terminal connector strips
- 3 BC547 NPN silicon transistors
- 2 BC557 PNP silicon transistors
- 2 EM401 silicon power diodes
- 1 Varley E3202 relay, 12V double-changeover contacts
- 1 470uF/25VW PC electrolytic capacitor
- 1 100uF/25VW PC electrolytic capacitor
- 2 50uF/50VW PC non-polarised capacitors

### RESISTORS

( $\frac{1}{4}$  or  $\frac{1}{2}$ W or 10% tolerance)

- 1 x 270k, 2 x 56k, 4 x 22k,
- 1 x 10k, 2 x 220 ohms, 1 x 120 ohms.


### MISCELLANEOUS

- 7 PC stakes, length of three core flex, solder lug, grommet, rubber feet, screws, nuts, lockwashers, hook-up wire, solder.


**NOTE:** Resistor wattage ratings and capacitor voltage ratings are those used for our prototype. Components with higher ratings may be used provided they are physically compatible. Lower rated components may also be used in some cases provided their ratings are not exceeded. See notes on components in the text.

If one of the amplifier outputs goes positive by more than two volts, Tr3 is forward biased and it conducts to remove the base bias from Tr4. Hence Tr4 and Tr5 turn off and the relay disconnects the loudspeakers. Similarly, if the amplifier output goes negative by more than two volts, the emitter of Tr1 is pulled negative with respect to its base. Tr1 then conducts as does Tr2, and so Tr4 and Tr5 are turned off as before.


So all the transistors function as simple

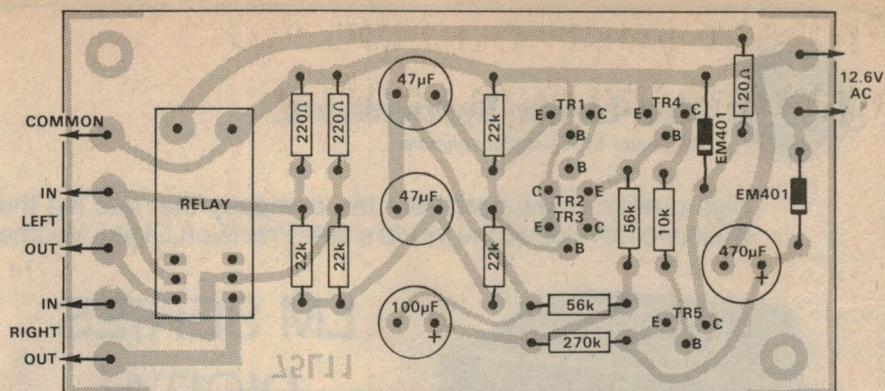

The PC board layout of the Protector. The 47uF capacitors are non-polarised.

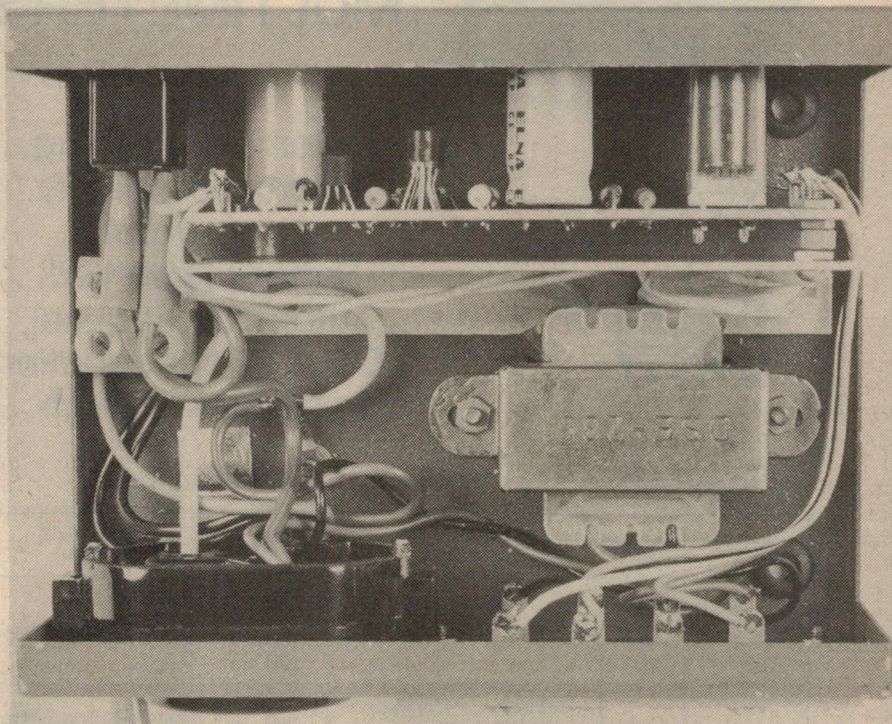

The PC board was mounted vertically in the prototype. Below is the rear view.

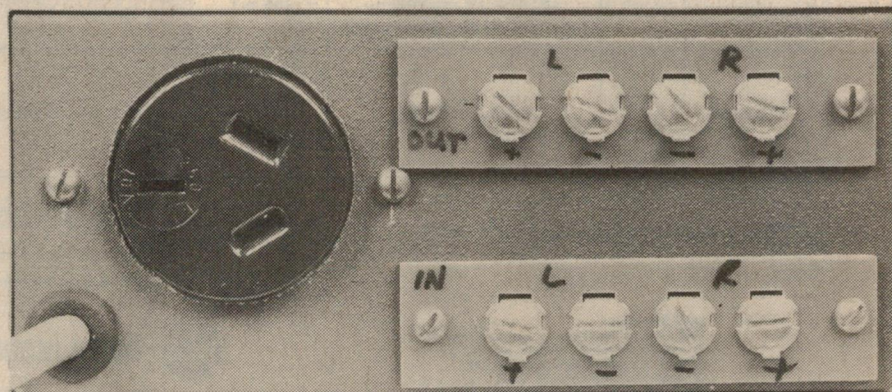

switches which are only controlled by DC signals. AC signals have no effect due to the input filter.

The two 50uF capacitors in the input filter are non-polarised electrolytics. They have to be, since DC voltages of either polarity may be applied to them. The capacitors we used are made by Elna and are referred to by the manufac-

turer as being "bipolar"—a term normally applied to conventional transistors. We prefer the term "non-polarised".

The 220 ohm resistors on the circuit are marked with asterisks. These should be included where the Protector is used to eliminate switch-on thumps from amplifiers with output coupling capacitors. The resistors allow the output





**Non-Linear Systems, Inc.**

Originator of the digital voltmeter.

High quality at low cost from the company that has led the Digital Revolution since 1952 when we developed the world's first Precision Digital Voltmeter.



**LM-3**  
Full three digits.

**\$99\***

## LM SERIES DIGITAL MULTIMETERS

Automatic zeroing.  
Automatic polarity.  
Drop-proof.  
Battery powered.  
Automatic decimal.  
MOS/LSI construction.  
Less than 2" high.



**LM-4**  
Full four digits.

**\$180\***

\*This price includes Nicads and Battery charger.

\*All prices plus 15% sales tax if applicable.

\*All NLS metres are protected by a one year warranty.

MODE	RANGE	ACCURACY (LM-4)	RESOLUTION (LM-4)	ACCURACY (LM-3)	RESOLUTION (LM-3)	INPUT RESISTANCE	TEST** CURRENT
VOLTS DC*	1	±0.02% of Full Scale	100 μV	±(0.1% F. S. + 1% Rdg.)	1 mV	10 MΩ	
	10		1 mV		10 mV		
	100		10 mV		100 mV		
	1000		100 mV		1 V		
VOLTS AC*	1	±(0.1% F. S. + 0.2% Rdg.); 50-400 Hz (All ranges) ±(0.1% F. S. + 1% Rdg.); 400-50 KHz (1V range) ±(0.2% F. S. + 10% Rdg.); 400-5 KHz (10V & higher ranges)	100 μV	±(0.3% F. S. + .8% Rdg.) 50/400 Hz	1 mV	10 MΩ, 20 pF	
	10		1 mV		10 mV		
	100		10 mV	100 mV	±(0.3% F. S. + 10% Rdg.) 400/5000 Hz		
	1000		100 mV	1 V			
KILOHMS	1	±0.1% of Full Scale	100 mΩ	±(0.1% F. S. + 1% Rdg.)	1 Ω		1 mA
	10		1 Ω		10 Ω		100 μA
	100		10 Ω		100 Ω		10 μA
	1000		100 Ω		1 kΩ		1 μA
	10000		1 kΩ		10 kΩ		100 nA
* 1000 VDC or peak AC maximum any range. **5 VDC maximum test voltage in K/MΩ mode.			OPTIONAL FEATURES High Voltage Probe — To 30 KV (1000:1 Reduction) \$26.00; Leather Carrying Case — Belt and Neck Strap \$11.00; Carrying Handle/Tilt Stand \$2.40; Current Shunts — 100 μA, 1mA, 10mA, 100mA & 1A on 1V range \$4.10 ea.				

If the LM Series is not yet at LM Stockists in your city then you may order direct. Please include \$2.00 for freight.

**LM-3 Stockists:**  
Melbourne: Radio Parts, Lawrence & Hanson  
Sydney: Dick Smith, Lawrence & Hanson  
Adelaide: Compar Distributors Pty. Ltd.  
Geelong: Teleparts (also Morwell)  
Newcastle: Digitronics Div Edmonds Moir & Co.  
Hobart: Lawrence & Hanson  
New Zealand: Pye Ltd. Systems Division.



**Non-Linear Systems, (Australia) Pty. Ltd.**

P.O. Box 122, Glen Waverley, Victoria, 3150, Australia.

Telephone: (03) 232 4506/232 7535

Non-Linear Systems



23 Years of Progress



## LOUDSPEAKER PROTECTOR

capacitors to charge in the delay period before the loudspeakers are connected. If the resistors were omitted there would be an awful bang from the loudspeakers when the relay is energised.

While the 220 ohm resistors are essential where the Protector is to be used with amplifiers having output capacitors, they should be omitted where used with amplifiers having direct-coupled outputs. If they are included there is a strong likelihood that they will be burnt out in the event of an amplifier fault.

As it stands, the Protector circuit can be built in a number of forms. First, it can be built into the amplifier it is to work with, and powered from it. The supply rail may be anywhere in the range from 12 to 45V DC. The only change necessary to adapt to differing supply rails is that the 120 ohm resistor should be varied so that no more than 12V is applied to the relay. Coil resistance of the relay specified is 205 ohms.

Current drain of the circuit with the relay energised is close to 60 milliamps. If it is run from the main positive DC rail in the amplifier the diode and 470uF filter capacitor may be omitted. Note that the zero volt rail (ie, earth) of the Protector should connect to the main earth point of the amplifier.

If it is inconvenient to power the Protector from the main positive DC rail of the amplifier it is possible to run it from an AC winding on the power transformer provided that one side of the winding is, or can be connected to the main earth of the amplifier. AC input voltage to the rectifier of the Protector may be in the range of 9 to 30VAC. If the resultant DC voltage is more than 25V, the voltage rating of the 470uF filter capacitor should be increased accordingly.


Where the constructor does not wish to incorporate the Protector into an existing amplifier it will be necessary to construct it as a separate unit with its own small transformer to provide the DC supply. Here again it can be built in one of two versions. Note that the Protector transformer must be energised at the same time as the amplifier.

Where the amplifier in question has switched 240VAC outlets the Protector can be plugged into the rear of the amplifier and controlled by the amplifier power switch. If the amplifier does not have a switched 240VAC outlet, the Protector will be required to have its own power switch and a 3-pin mains socket into which the amplifier can be plugged. The amplifier is then turned on and off with the Protector power switch. Our prototype is the latter version.

Our prototype was housed in a neat little case supplied by Bespoke Metal-

work, 42c Sydenham Road, Brookvale, NSW. The case is denoted type MT1, comes in crackle enamel finish of blue, black or red and has a clear anodised aluminium lid. Dimensions are 136 x 60 x 104mm (W x H x D). Parts suppliers can order from Bespoke at the above address.

A flush mounting 3-pin outlet and two sets of four-way screw terminals are mounted on the rear of the case. The sets of terminals are for connection of output wires from the amplifier and wires to the loudspeakers. The front panel is bare except for the power switch.

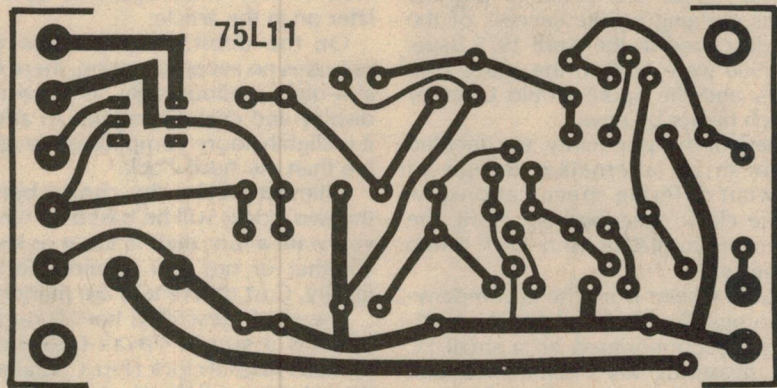

Here is the full size copper pattern of the PC board.

A PC board coded 75L11 and measuring 102 x 51mm accommodates the circuitry. The relay is made by Varley, type E3202, and is soldered directly to the PC board. The non-polarised electrolytic capacitors can be soldered in either way round.

General-purpose small-signal silicon transistors can be used for this circuit. Tr1, 3 and 4 may be BC548, BC108 or any equivalent NPN type, but if the circuit is incorporated into an amplifier and has a DC rail of more than 30V then Tr4 should be BC547, 107 or equivalent. Similarly, Tr2 and Tr5 may be BC558, BC178 or equivalent PNP type, but if the supply rail is more than 30V, Tr5 should be BC557, 177 or equivalent.

Note that if the resistor in series with the relay is modified to cope with a higher voltage DC rail, its power rating should be adequate for the purpose. For a DC rail below 20V, a ½W resistor will suffice.

As it stands, the Protector is suitable for amplifiers with ratings up to about 100 watts RMS per channel. If it is to be used with higher rated amplifiers a relay with higher rated contacts will have to be used. The contacts in the relay specified have a rating of 5 amps.

Use PC stakes or pins to make connections to the PC board. These make it easy to make and break connections. The PC board was mounted on a vertical bracket slightly larger than the board and made

of aluminium.

The power transformer is a miniature type with a 12.6V secondary. Ferguson PF 2851, A & R 6476 or DSE 2851 are suitable.

These transformers normally have a centre tap connection to the secondary. This should be coiled up and taped to prevent it shorting to the case.

The three-core mains cord should be passed through a grommeted hole in the rear of the case and anchored with a cord clamp. The earth conductor should be terminated to a solder lug on the chassis while the active and neutral wires are terminated to an insulated terminal block. Connections to the power switch, transformer and AC outlet are then made from the terminal block. On no account should any connection be made from the

Protector chassis to the earth returns of the loudspeakers or amplifier

When assembly is complete, the Protector can be checked for correct operation without connecting it to an amplifier. Switch on and check that the relay closes after about two seconds. Drop out time for the relay after switch-off is about half a second. A shorter delay before the relay closes will occur if the Protector is switched on immediately after it is switched off.

Fault conditions at the input can be simulated with a nine-volt battery. Just connect across the inputs, either way, and the relay should open after a short delay of less than half a second. If you connect the battery to the output terminals of the Protector you can check that the relay is correctly breaking the circuit when a fault occurs. If it is, the relay will open and close repeatedly until the battery is removed.

When operation of the circuit has been checked, the unit can be connected to the amplifier and loudspeakers.

You can then sigh with relief, because your precious loudspeakers are now safe from damage if your amplifier pops an output transistor.

There is one other advantage of the Protector. It enables you to quickly kill the sound of an objectionable program, rather than letting it fade away after normal switch-off. For example, blah blah razzle dazzle and (click) ...



# Fluorescent Readout LSI Digital Alarm Clock

Here is yet another LSI digital clock. This versatile design provides for either 12 or 24 hour operation, has integral alarm and snooze facilities, and uses a bright 4-digit fluorescent readout display. If you want a digital clock with alarm facilities, this is the one to go for.

by GREG SWAIN

Digital clocks are certainly popular projects, judging by the success of the clock described in the April 1975 issue. Over 1500 were built in the space of 6 months, and the figure would certainly be much higher by now.

In view of this popularity, we decided to publish an alternative design of somewhat differing specifications. As with the clock described last April, the new unit is available from Dick Smith Electronics.

As can be seen from the accompanying photographs, most of the clock circuitry is accommodated on a small PC board measuring 104 x 60mm. The unit may be constructed for either 12 or 24 hour operation, and is housed in an attractive plastic case supplied as part of the kit. Overall dimensions of the completed unit are a compact 148 x 77 x 60mm (W x H x D).

The new clock differs from the one described in the April issue in a number of important ways. First, there is the advantage of the integral alarm facility which allows the alarm to be set up to 24 hours in advance. A snooze button permits an activated alarm to be turned off and reset for another 7 minutes. And by the addition of some simple circuitry, the new clock can be used as an accurate

time switch. This feature is described later on in the article.

On the debit side, the new clock provides no seconds option, there being a 4-digit readout only as a result of display and chip limitations. In addition it is slightly more complicated to assemble than the April clock.

Ultimately then, the choice between the two clocks will be based on whether you want a four digit readout or six, and whether or not you require the alarm facility. Cost differences are marginal.


The clock described here is designed around a single Texas Instruments TMS3834 digital clock chip. Contained on the LSI chip is all the electronics circuitry

necessary to convert the 50Hz pulse input at pin 28 into a multiplex readout for 4 digits, together with alarm setting and alarm output facilities.

Basic clock operation is as follows. First, half rectified 50Hz is applied to pin 28 of the clock chip. An internal signal shaping network squares the signal up in a signal shaping circuit, and then divides it down to 1 pulse per second (1pps). The 1pps signal is fed to a counter which cycles in BCD from 00:00 to 23:59 in the 24 hour mode, or from 01:00 to 12:59 in the 12 hour mode.

BCD output from the clock counter is decoded and multiplexed to drive the display.

*Rear view of the completed unit showing the time setting and alarm facilities.*

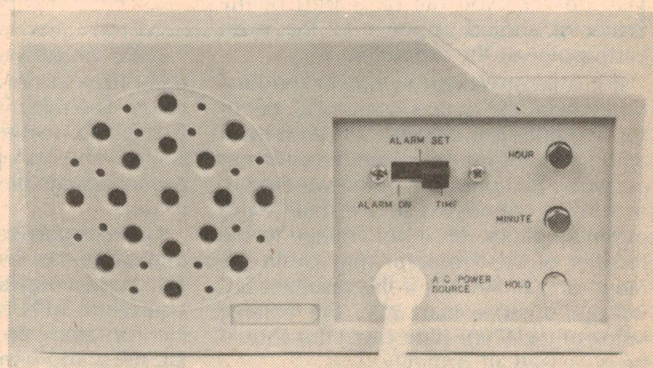


The clock in finished form, housed in the plastic case supplied with the kit.

In simple terms, multiplexing involves the simultaneous transmission of more than one piece of information via the same path. The path can be thought of as being time shared, if you like. In this case, we need to display up to four numbers simultaneously. Each number has up to seven segments each requiring an item of information.

In fact, when all is taken into consideration each seven segment display requires eight separate lines. Multiply this by four for a 4-digit display and we would need 32 lines. However, in the case of a clock, the most significant digit can never exceed 2 when operated in the 24 hour mode, or 1 when operated in the 12 hour mode. This reduces the number of lines required to 31 and 27 respectively.

If the clock chip were to use a conventional seven segment decoding,



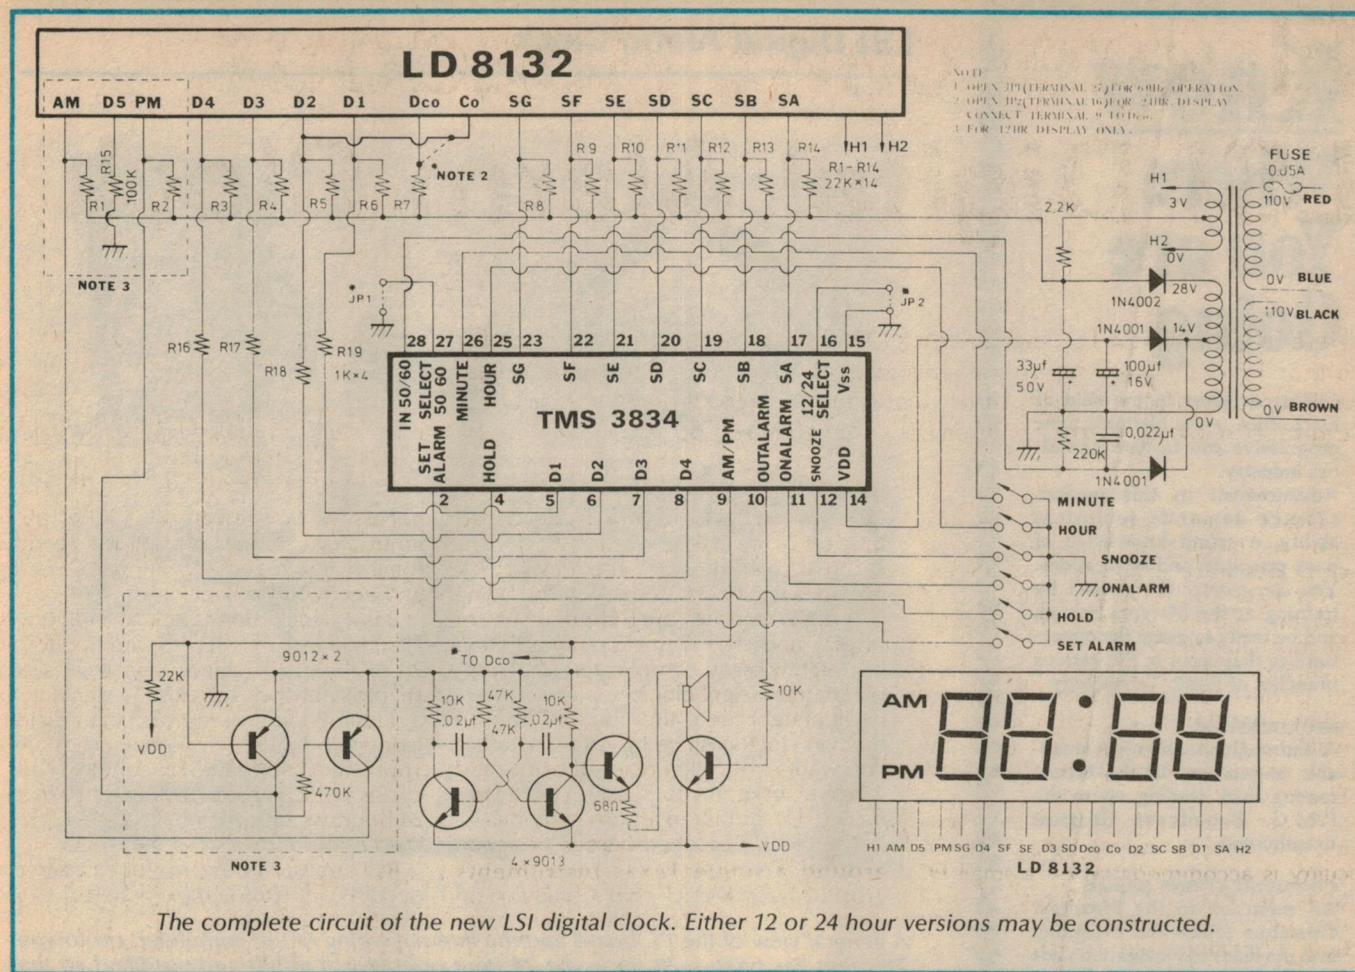

therefore, it would require 31 output connections to the display, plus all the input, supply and control connections. Although not impossible, it would tend to make the package somewhat unwieldy.

Multiplex operation gets around the problem by not attempting to show all the digits continuously. Instead the digits are flashed sequentially, usually at a rate of about 1kHz. At this rapid rate, they all appear to be on continuously.

As with the previous clock, a bright fluorescent readout display is employed. However, whereas the previous clock used separate readout "bottles" for each digit, the digits here are encapsulated in a common "flat" glass envelope. Actual height of the readout numerals is 12.5mm.

Basically, the fluorescent readout display consists of a directly heated cathode, a control grid per digit, and a number of anodes—one for each segment of each digit of the display. In addition, anode segments and control grids are provided for the colon and for the AM and PM indication.

Two very fine wires running horizontally across the face of the display provide the common cathode for all digits. One side of the cathode is tied to the negative supply rail via a 2.2k resistor, and it is fed from a 3V winding on the transformer.

A fine mesh immediately in front of the anodes for each digit acts as the control grid. In this case the anodes are tied to the negative supply rail via 22k isolating resistors, and are normally held off. When driven by the segment driver output of the clock chip, the appropriate segments are brought to ground potential and are therefore positive with respect to the cathode. The display can then be made to light up by making the grid positive with respect to the cathode.

All equivalent anode segments of the various digits are bussed to seven common lines, each driven by a segment driver output of the clock chip (pins 17 to 23). The various control grids are driven by the clock chip via 1k pull-up resistors (pins 5 to 8). Thus for a 4-digit display, there are only 11 separate connections from the clock chip.

To display the various digits correctly, control signals are applied sequentially to each of the digit grids in turn. At the same time, the corresponding common segment lines for each digit are brought to ground by the segment driver output of the clock chip. The signals change appropriately as grid voltage is applied to each digit.

The alarm circuitry consists of a free running or astable multivibrator which generates an audio tone. This is coupled to a small loudspeaker via an NPN driver

transistor. A fourth transistor, also in series with the loudspeaker, acts as a switch. When the time counter within the clock chip reaches the same count as the alarm counter, the alarm output (pin 10) delivers a series of 1 second pulses to the base of this transistor, turning it on and off. The loudspeaker thus delivers a pulsed tone.

Three push-buttons are provided for time setting: Hold, Hour Advance, and Minute Advance. The latter two buttons rapidly cycle the time forward. Then, by using the Hold button, you can hold the time static until the precise time required is reached. Note that when the Hold button is released, the clock will begin counting from zero seconds.

Note also that this clock eliminates illegal time displays at switch-on. When power is first applied, 0:00 is displayed. The correct time is then set using the time-setting push-buttons as outlined above.

The clock is, however, tolerant of power failures of up to five seconds (although it will discontinue counting during such interruptions). In practice, this means that the clock will continue to operate despite momentary power failures, as in the case of severe electrical storms. This is obviously a desirable feature where reliance has been placed on the alarm facility.



# Know Where You are Going

Choose a career in the field of Electronics — the Nation's most progressive and fastest expanding industry.

Advancement in this modern science demands technical ability, a sound knowledge of basic principles and applications. You can master the subject by training at the Marconi School, and be ready to grasp the opportunities that occur in the various branches of Radio Technology.

## BROADCASTING

A thorough grounding is available to students in the broadcasting field, leading up to the P.M.G. Broadcast Station Examination.

## COMMUNICATIONS (Marine)

An extension to the Broadcast Operators course and extending into the fields of Navigation Aids and Electronic Devices used in mobile communications as required by the P.M.G. Certificates of Proficiency.

## APPLIED SERVICING

Comprehensive training in the maintenance and repair of radio and television receivers offers substantial rewards to competent technicians. Marconi School training covers all aspects of radio and television receiver circuit applications, practical exercises in fault finding and alignment procedures.

The Marconi School Radio Servicing correspondence course is approved by the N.S.W. Apprenticeship Commission

Classes are conducted at:  
67 Lords Road, Leichhardt.

Day: 9 a.m. to 4 p.m.

Evenings: 6 p.m. to 8.30 p.m. or  
by Home-Study Courses (except  
practical instruction on equipment).

## SEND FOR PROSPECTUS


There is no obligation

NAME.....

ADDRESS.....

**MARCONI SCHOOL OF WIRELESS**  
Box 218, P.O., Leichhardt 2040  
A service of  
Amalgamated Wireless (Australasia) Ltd.

## LSI Digital Alarm Clock

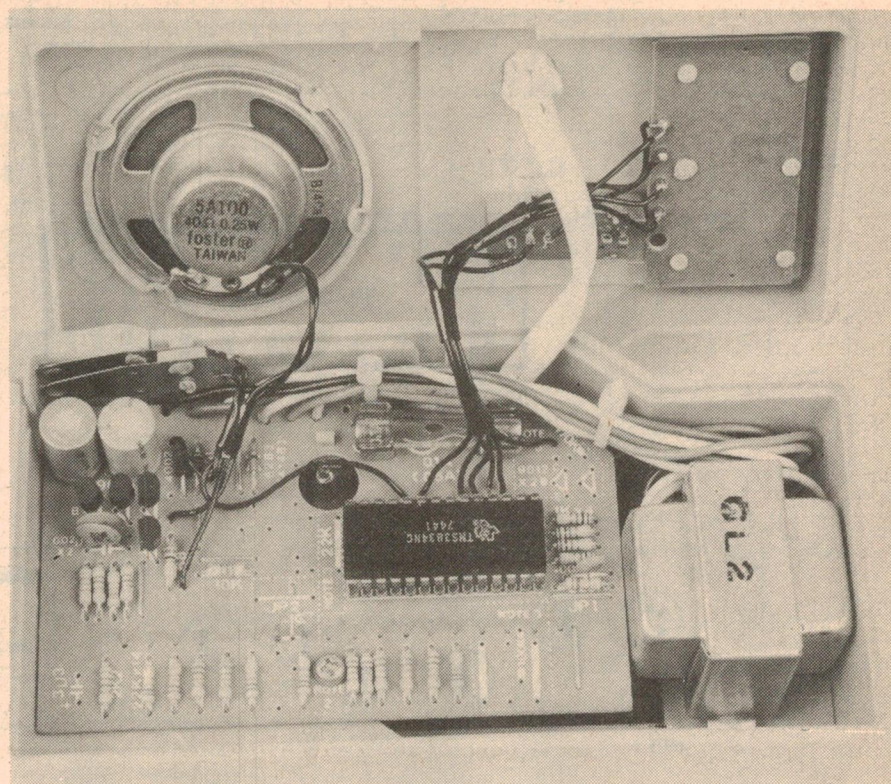

A general view of the PC board and the internal wiring of the completed prototype. This unit has been built up in the 24 hour operational mode and modified so that the colon is displayed continuously. Full details are given in the text.

available in two versions. The first and the one most likely to be of interest to EA readers, is the kit version for \$34.95. For the less confident, a fully built and tested version is available for \$37.50. Postage and packing is an extra \$1.00 in both cases. At these prices, we judge both alternatives to be good value for the money.

The kit itself is a cinch to put together (once you have decided on whether you want a 12 hour display with AM and PM indication, or a 24 hour display with or without flashing colon). Perhaps the most complicated aspect of assembly is the mechanical construction, particularly the self assembly push-button switches. However, the mechanical layout is clearly explained by means of detailed diagrams supplied with the kit, and there should be no problems here.

Normal good soldering practice should be followed when wiring up the small PC board, which is coded and pretinned for easy assembly. Begin by soldering resistors and capacitors into position, not forgetting the number of wire links that must be added, according to your choice of options. Take particular care when soldering polarised components into position, i.e., transistors and electrolytic capacitors.

Two integrated circuit connector strips

(as made by Utilux and other companies) are supplied as the IC socket. The terminals should be inserted and soldered with the leader strip intact. The leader strip should then be snapped off so that each pin connector is separated from its neighbour.

Before mounting the display, it will be necessary to complete the external wiring to the function switch, the time setting switches, and the speaker. This is because the display obstructs the foil side of the board when mounted in position.

The display tube is mounted on the copper side of the PCB. Push the pins all the way in to the step and solder. The tube is then bent through ninety degrees so that it is parallel to the board. A plastic "locator mount" is fitted between the top edge of the display and the board.

Due care should be exercised when handling the TMS3834 clock chip. This is a MOS device and, as such, is susceptible to damage by static charges. Do not touch the pins of the device. Instead, hold the two ends of the device between your fingers, and push it firmly and evenly into the IC connector pins.

Be sure to orient the IC so that the notched end is as indicated on the circuit board. Because the IC can be so easily damaged, we recommend that it be left



in its protective foam package until required. It should be installed in the circuit as the final job of assembly.

As originally supplied the clock is intended to be built either in the 12 hour mode with continuous colon and AM and PM indication, or in the 24 hour mode with flashing colon. As a matter of personal preference, the author initially constructed the clock in the latter mode.

However, the flashing colon was subsequently found somewhat irritating. Worse still, the brightness of the display varied in sympathy with the flashing colon, this effect being slight but noticeable.


The solution to this problem is fortunately quite simple, and involves modifying the clock slightly so that the colon is displayed continuously. All you have to do is omit the JP-3 wire link, and insert the JP-4 link. Note that the JP-4 link simply involves tying the appropriate two pins of the display (Dco and Co) together after the display has been inserted and soldered into position.

A word of warning for those who construct the clock in the 12 hour mode. As originally conceived by the manufacturer, the TMS3834 IC clock chip was intended for 24 hour operation only. Advice to hand indicates that the 12 hour mode was added to the chip almost as an afterthought, as was the AM and PM indication.

The result of all this is that the chip has an inherent design limitation when operating in the 12 hour mode. This limitation affects the AM and PM indication signs, such that these are always an hour late in changing. In other words, instead of changing at 12 noon and 12 midnight, the AM and PM signs change at 1 o'clock in the afternoon and 1 o'clock in the morning. This means that between the hours of 12 and 1, the sign shown will always be the wrong one!

What can be done about it? Absolutely nothing. Those who build the clock in the 12 hour mode will just have to be content with this feature which, at worst, can only be considered a minor annoyance. Of course if you build the clock in the 24 hour mode, the problem becomes irrelevant anyway.

## COMPONENT LAYOUT

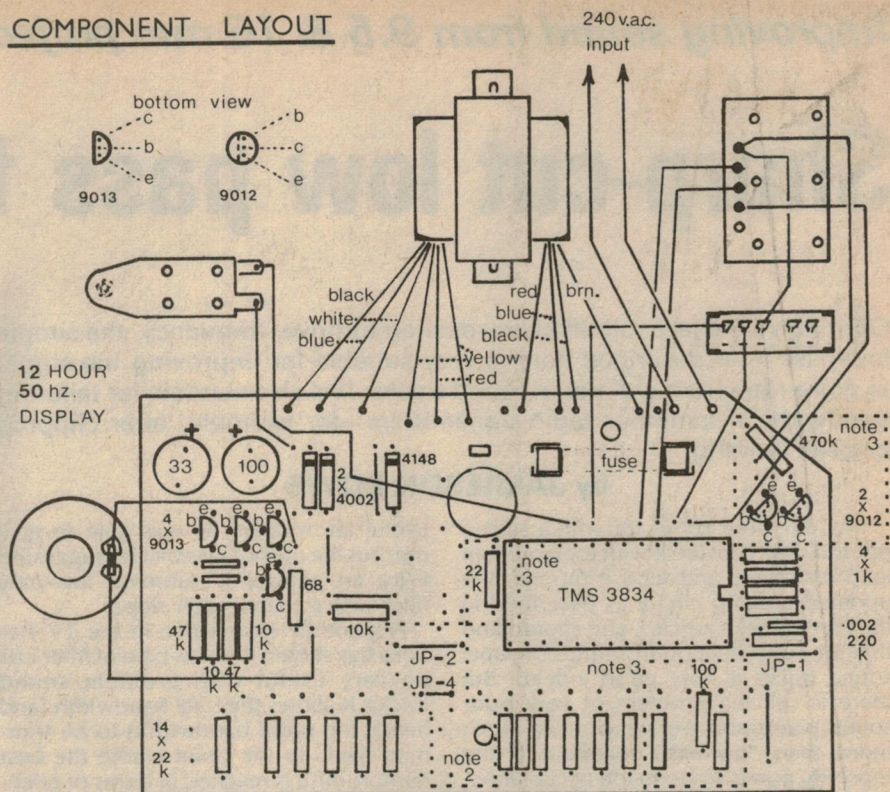

Component layout and wiring diagram of the 12 hour version of the clock. For the 24 hour version with continuous colon omit JP-2 and all "note 3" components, and insert a 22k resistor in "note 2" (insert JP-3, omit JP-4 for flashing colon).

As mentioned earlier, the alarm output of the clock chip can be used to turn another appliance on or off at a predetermined time. As accurate time switch is a very useful device, and can be used to control all manner of equipment eg, radios TVs, lights, garden watering equipment, tape recorders etc. The extra circuitry involved is straightforward, and is reproduced here for the benefit of interested constructors.

The circuit is one recommended by Dick Smith Electronics. It has not been built and tested in our lab.

Actually the circuit is a bistable flip-flop. At initial switch-on transistor T2 is prevented from conducting by the .047uF capacitor in its base circuit so that T1 turns on. This means that the relay is normally unenergised.


When the alarm circuit is activated, T3 is turned on, forward biasing diode D1 which delivers a turn-off pulse to the base of T1 via the .001uF capacitor. This turns T1 off and T2 on, energising the relay. The relay remains energised until power is removed from the bistable circuit.

The E3201 relay specified in the circuit is only a small type, intended for low power applications (5A at 30VDC or 240VAC). Relays of similar specifications may be substituted, and these should have an operating voltage of 12V and a coil resistance of approximately 200 ohms. Whichever relay you use, make sure that its ratings are adequate for the job.

Note that for the circuit shown, the usual alarm sound will occur when the alarm is activated. If this condition is not required, simply disconnect the lead between the speaker and the collector of T3. In fact, we suggest that the appropriate leads be terminated at a small switch so that either the alarm facility or the bistable switch may be selected at will, or both together if required.

Note also that some kind of switching arrangement will be necessary to enable the bistable switch to be reset. This simply involves interrupting the positive supply rail to the bistable circuit. We leave the details to individual constructors.

And there you have it—a further LSI digital clock project, with its own unique features. The choice is yours.

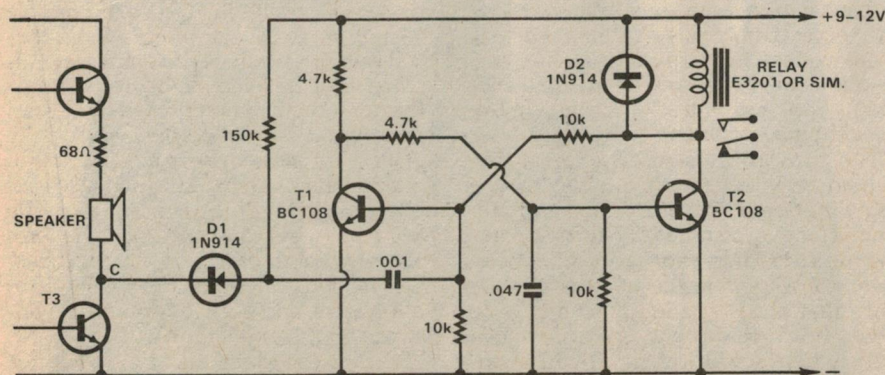

This simple circuit will allow you to adapt your clock for use as an accurate time switch. Use it to automatically turn on lights, TVs, tape recorders etc.



# Sharp-cut low pass filter

Offering very sharp roll-off at any desired turnover frequency, the simple low-pass filter described here is very suitable for improving the signal to noise ratio from old movie sound tracks. It is also suitable for tailoring bandwidth in amateur radio transmitters—for example, after clipping or peak limiting.

by JAMIESON ROWE

If you fit your projector with a silicon photodiode, provide it with the optimum load resistance and feed it through the updated preamp circuit as described in the first of these articles, you should find that the reproduction from most normal sound tracks is very good indeed. But there is still the problem of very poor sound tracks, some of which need much more than "normal" treatment if the reproduction is to be made acceptable.

I soon discovered this myself when testing the updated preamp. Reproduction from most films seemed much improved, and quite impressive. But that from the very poor contrast print which had actually spurred me into rebuilding the unit was still very noisy, and left a lot to be desired. It was as if the complete sound track was accompanied by a continuous and torrential rainstorm!

My first thought was to try coloured filters in the sound scanning light path, in an effort to improve the effective contrast of the track. However, although I tried a variety of different coloured filters, the results were inconclusive.

At this stage I thought the best idea was to talk to someone who had more experience with the problem. So I contacted Mr Murray Stevenson, who was Chief Engineer of TV station ATN-7 in Sydney at its inception and for many years. If anyone would have experience with coaxing sound from poor sound tracks, I reasoned, he should!

This certainly turned out to be the case, and Murray very kindly gave me the benefit of his experience. Unfortunately there isn't room here to pass on all of the

useful information he was able to give me, but the upshot was that he suggested I try an adjustable turnover low-pass filter with a sharp cutoff slope.

Apparently experience in the TV stations has shown that this type of filter can be very useful with problem sound tracks. It allows the total bandwidth (and hence the noise bandwidth) to be trimmed back, to the point where the best compromise is reached in terms of effective signal-to-noise ratio.

At times, I gather, it can prove necessary to chop back the bandwidth to as low as 2.5kHz to obtain acceptable reproduction, although this rather drastic degree of filtering is not often needed. Despite the low bandwidth, such films can still sound acceptable, particularly if the bass response is reduced a little as well. And the clarity of speech can actually be improved by having a small peak in the response of the main low-pass filter, just before its steep cutoff.

Armed with this information, I decided to build up an adjustable filter of the type required. My first approach was to use a couple of modern op-amps, in an active filter configuration. However while these worked, they had to be very critically adjusted in order to achieve a suitably sharp cutoff slope. And it became apparent that this type of filter is not really suitable where the turnover frequency must be switched over a significant range.

When I mentioned this result to Neville Williams, he suggested that it might be worthwhile looking at a simple L-C filter design he had used many years ago in a scratch and heterodyne filter project. We looked up the project concerned, which turned out to be in the December 1949 issue of "Radio and Hobbies". And sure enough, the basic filter configuration did look as if it would be suitable for the present purpose.

The basic filter is shown in Fig. 1. It uses three inductors and two capacitors, with the two series inductors mutually coupled. Although its detailed operation might be rather complex to analyse, broadly speaking it seems to combine the characteristics of "T" and "pi" section filters. With suitable scaling of component values, it can give a passband flat-


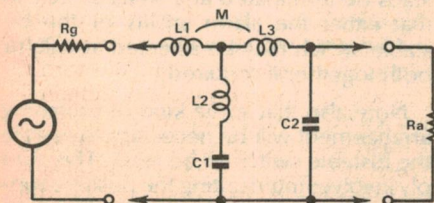


FIG. 1: BASIC FILTER CONFIGURATION

At right is the filter board as wired for fixed-cutoff operation. The basic filter configuration is shown above.



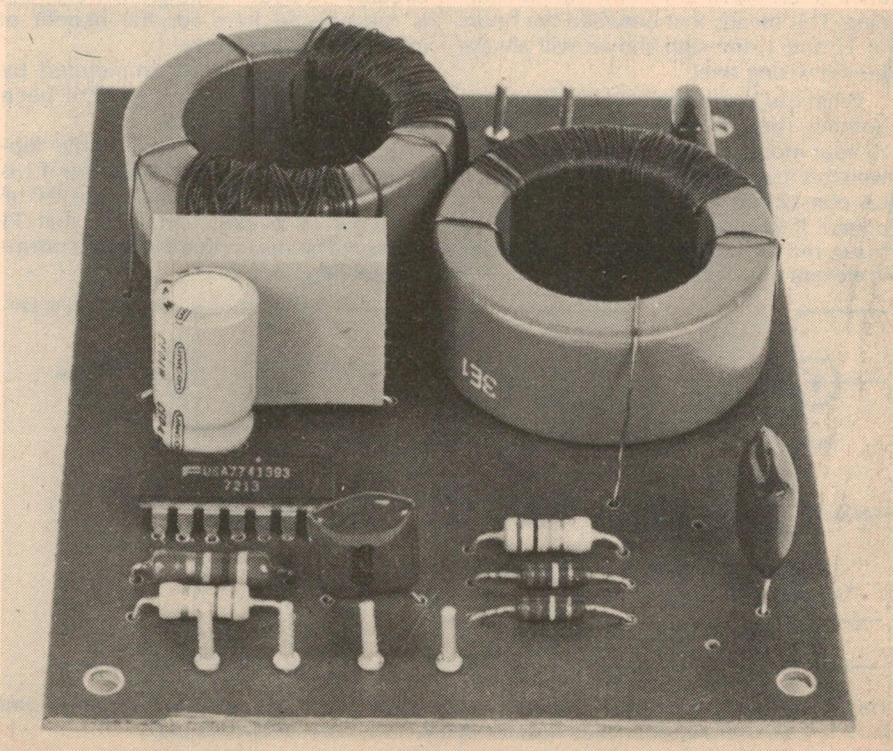

ness of better than 1dB, with a cutoff slope of around 22dB per octave.

As originally described, the filter was designed to work at an impedance level of 2k, driven by a triode-connected 6SJ7 valve. The inductors were air-cored types, wound on home-made wooden bobbins. I decided to aim for a lower impedance level—say 1k, with the idea of reducing the required inductance values, and hopefully making them easier to wind. I also decided to try winding them on ferrite toroids, as this would not only reduce the number of turns needed, but also obviate possible hum pickup.

To cut the story short, this approach has turned out to be quite successful. As you can see from the circuit of Fig. 2 and the photograph, I have been able to come up with a simple filter unit of updated design, which seems to do the job very well. The complete circuit mounts on a small PC board, runs from 18V DC, and has unity gain.

You can either build it up with fixed capacitors on the PC board, giving a fixed turnover frequency, or use a two-pole switch as shown to give a selection of turnover frequencies. The switch can also be used to give straight-through or "flat" operation, where filtering is not needed.

For film work, the filter unit is intended to be connected between the preamp described last month and the main amplifier. It will handle the output level produced by the preamp without significant distortion, and with negligible effect on the system signal to noise ratio. Its own output impedance is around 5k, which should be suitable for feeding into most solid state or valve amplifier systems.

Of course there is no reason why you can't use the filter for other applications. It would be quite suitable for use in a modulator for amateur radio work, either for simple bandwidth restriction or for cleaning up the output from a speech clipper. It would also be suitable for

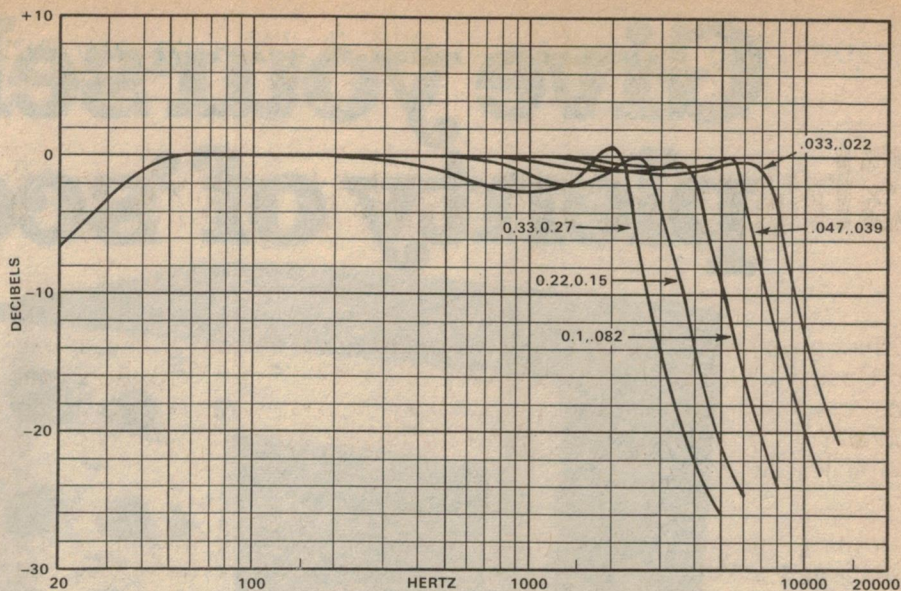


FIG. 3: RESPONSE OF SHARP CUTOFF LOW-PASS FILTER WITH 1k SOURCE, LOAD

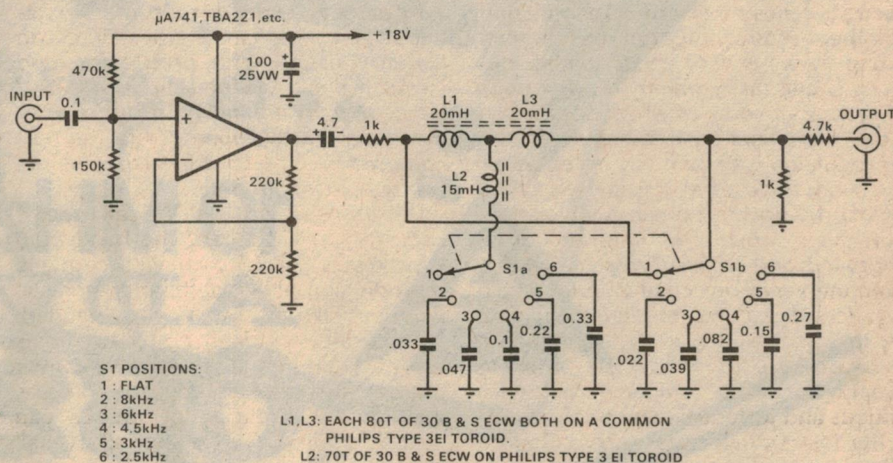


FIG. 2: SHARP CUTOFF LOW-PASS FILTER

1/F/8

audio filtering in direct conversion receivers.

Getting back to the circuit in Fig. 2, you can see that it is basically the filter of Fig. 1 provided with switching for the two capacitors. A buffer amplifier using a


uA741 or TBA221 op amp is used to drive the filter from a stable source, and also provides a gain of 2 to make up for the filter losses.

Low frequency response of the complete filter unit is 3dB down at around 30Hz, which is more than adequate for film work. It could be tailored if desired by reducing the values of the buffer input and output coupling capacitors, from their current values of 0.1uF and 4.7uF.

Inductors L1 and L3 are mutually coupled by winding them on a single ferrite toroid, while L2 is wound on a second toroid. Both toroids are the Philips type 3E1 (catalog number 4322-020-36571), which has a plastic coating to permit the wire to be wound on directly. At the time of writing this toroid is in good supply, and should be obtainable from your usual supplier.


L1 and L3 are each 80 turns of 30 B&S enamelled copper wire, giving about 20mH each with unity coupling. L2 is 70T of the same wire, giving about 15mH.

The PC board pattern for the filter, reproduced actual size to allow tracing if desired. The isolated pads are for toroid anchoring.

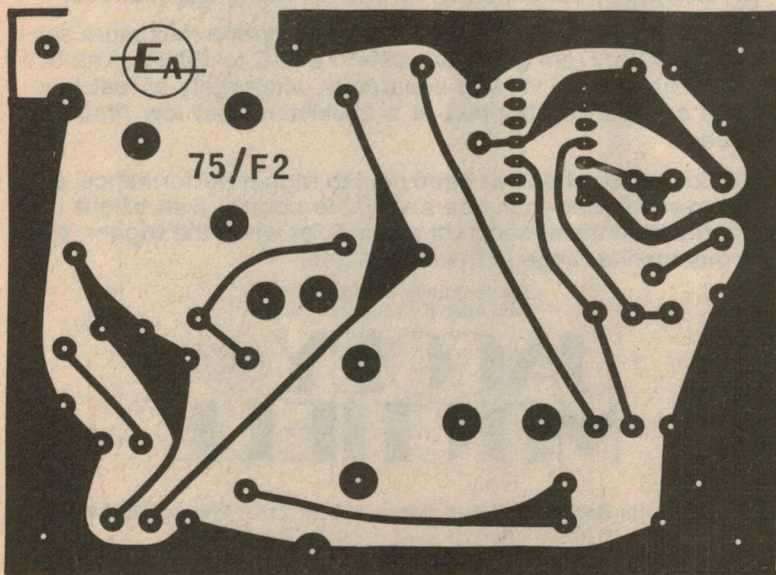



# Give yourself plenty of 'scope.

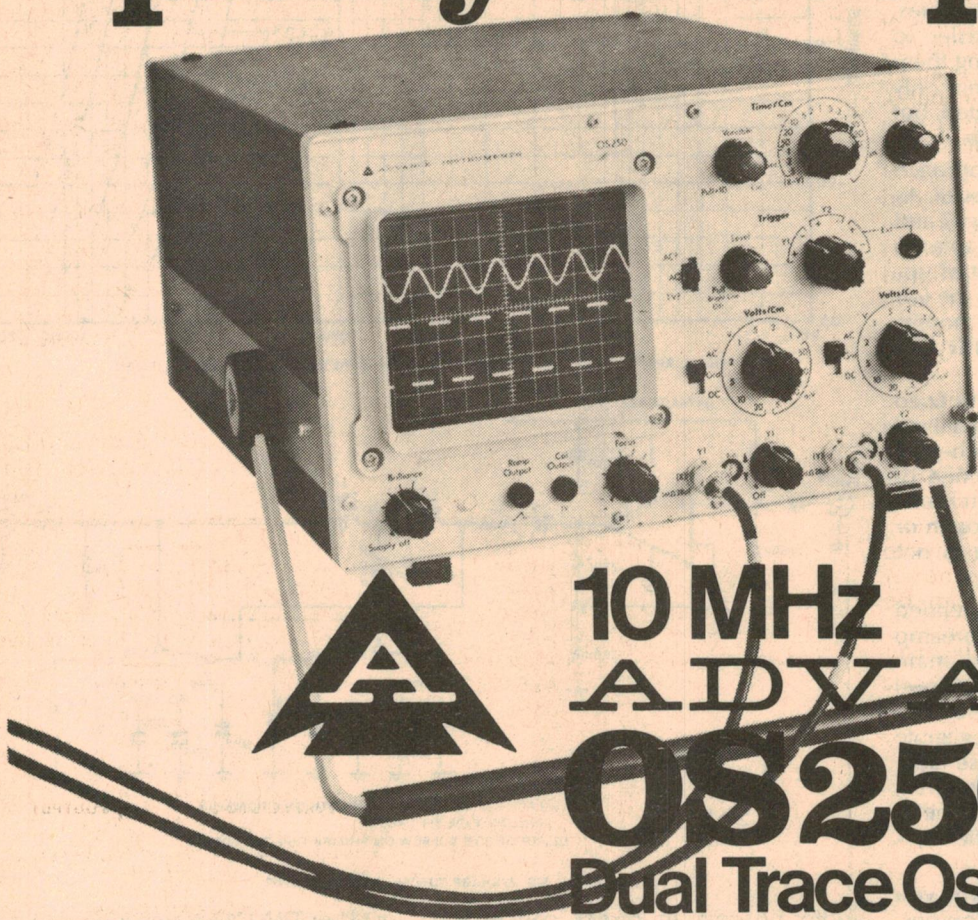

## 10 MHz ADVANCE OS250 Dual Trace Oscilloscope

### BRIEF SPECIFICATIONS

**Display:** 5 in flat faced CRT giving 10cm x 8cm display EHT — 3.6 kV overall.

**Vertical Deflection:** Two identical input channels. Y1 and Y2. **Bandwidth** (—3dB) DC—10MHz. **Sensitivity** 5mV/cm to 20V/cm in 1-2-5 sequence. **Input Impedance** 1M  $\Omega$ /approx. 28pF. **Input Coupling** DC-GND-AC.

**Display Modes:** Single Trace Y1 and Y2. **Dual Trace** chopped or alternate modes, automatically selected on timebase switch. Chop rate approx. 250kHz. **X-Y mode** with Y1 input giving X deflection and Y2 input giving Y deflection. Bandwidth DC to 500 kHz < 3° phase shift at 200 kHz.

**Horizontal Deflection. Timebase**—1  $\mu$ s/cm to 0.5 s/cm in 18 ranges (1-2-5) sequences. **X Expansion**—X10 pull switch gives fastest speed of 100 ns/cm. Variable control gives > 2.5:1 reduction in sweep speed.

**Trigger:** Variable level control with option of bright line in absence of signal. **Source** Internal Y1 + or —  
Y2 + or —

External + or —

**Coupling** AC, AC fast TV Frame. **Sensitivity** Internal 2mm approx. 40Hz-2MHz. External 1V approx. 40Hz-2MHz. Internal 1cm approx. 8Hz-10MHz. External 5V approx. 8Hz-10MHz.

**Additional Facilities:** Calibrator 1V  $\pm$  2% square wave at supply frequency. Dimensions .18cm(7") x 29cm(11 $\frac{1}{4}$ ") x 42cm(16 $\frac{1}{2}$ "). Approx. 7 kg.(15 lb).

Specifications quoted are for general guidance only, are subject to verification and change without notice.

Plenty of 'scope is what you get with Advance OS 250 in **two** ways. First, it's a lot of 'scope for the money. Second, it's got the versatility—with 10 cm x 8 cm display—for a wide range of laboratory, educational, TV and servicing applications.

It features two identical input channels with a maximum sensitivity of 5mV/cm and a bandwidth of DC to 10MHz. The two channels may be viewed separately, alternately at fast timebase speeds, or chopped at a 250kHz rate at low timebase speeds.

Particular attention has been paid to trigger performance, and the system used includes a variable control with bright line operation in the absence of a signal, or when the trigger level is outside the range of the input signal.

Ask for further details now from  
Sole Australian Representatives:

**JACOBY**   
**MITCHELL**

5/75

215 North Rocks Rd., North Rocks, N.S.W. 2151. Phone: 630 7400  
• Melbourne—44 5021 • Adelaide—293 6117  
• Brisbane—52 8266 • Perth—81 4144



## SHARP-CUT FILTER

Because of the closed magnetic circuit of the toroids, the windings are not critical in terms of shape, nor is it necessary to have L1 and L3 overwound or butting.


Winding toroids is not much fun, of course, but in this case there are only a few turns. You'll need about 3 metres of wire for the two larger windings, and 2½ metres for the smaller. All three can be wound quite easily in about 30 minutes.

As you can see, I have produced a small PC board to make the filter unit easy to assemble. Coded 75/f2, it measures 100 x 75mm. Space is provided for mounting the two toroids on the board, held in place by three short lengths of wire—soldered to isolated copper pads so that they don't form "shorted turns".


The wiring of the PC board is quite straightforward, and should be evident from the small diagram. Note that the pattern has been arranged so that you can drop in an op amp in either the 14-pin DIL, or the 8-pin "mini-DIL" packages. You could also use one in a round can, by bending its leads to suit.

Note also that if you want the filter to have only a single fixed turnover frequency, the capacitors can be mounted directly on the board.

The curves of Fig. 3 show the filter

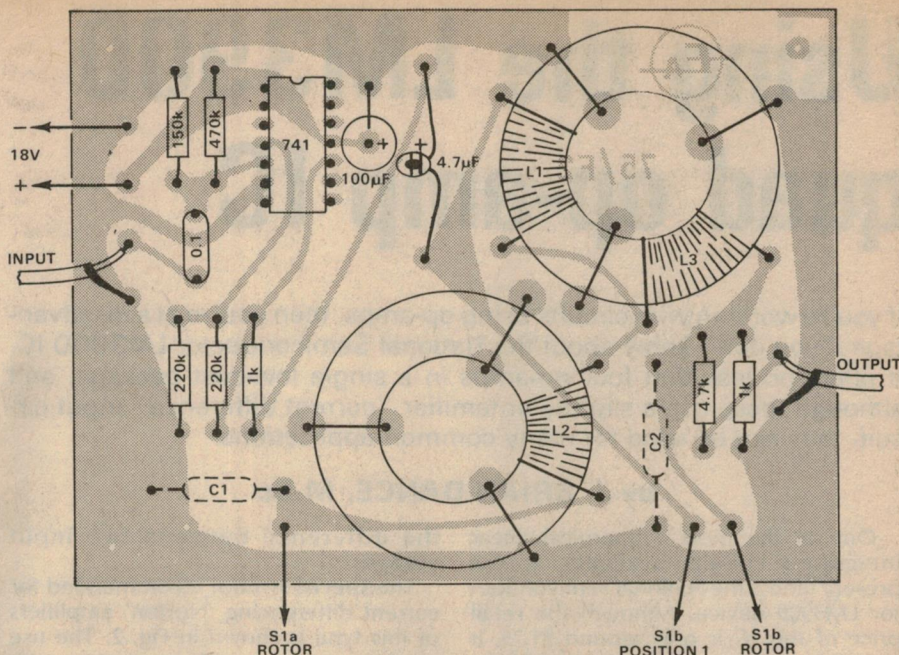

Above is the board wiring diagram for the filter, with the fixed filter capacitor positions shown dashed. If op amp packages other than the 14-pin DIL are used, connect using the guide diagrams below.

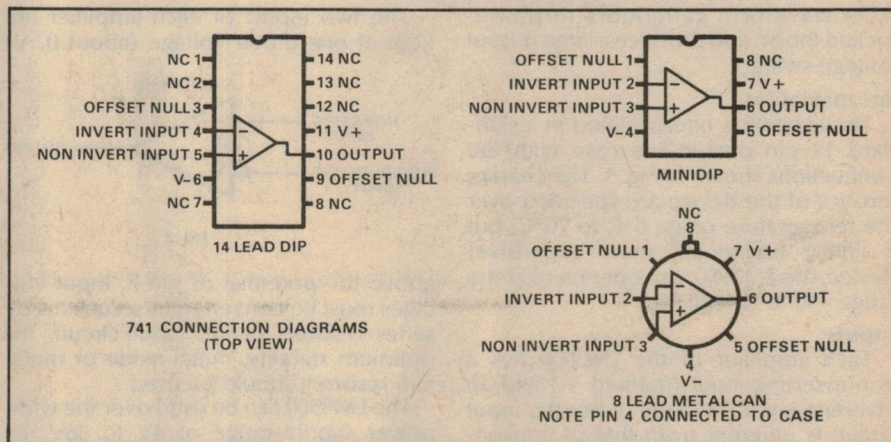

## LIST OF PARTS

- 1 PC board, code 75/f2 (75 x 102mm)
- 1 uA741, TBA221 or similar op amp IC
- 2 Philips 3E1 toroids (catalog number 4322-020-36571)

- 1 2 section 1-pole 6-position rotary switch

### RESISTORS (5% ¼-watt)

- 2 x 1k, 1 x 4.7k, 1 x 150k, 2 x 220k, 1 x 470k

### CAPACITORS

- 1 0.1µF LV polycarbonate
- 1 4.7µF 6VW tantalum electrolytic or LV polycarbonate
- 1 100µF 25VW single ended PC type electro

### Filter capacitors, LV polycarbonate:

- 1 x .022, 1 x .033, 1 x .039, 1 x .047, 1 x .082, 1 x 0.1, 1 x 0.15, 1 x 0.22, 1 x 0.27, 1 x 0.33

### MISCELLANEOUS

PC connection stakes, approx. 8½ metres of 30 B&S enamelled copper wire for winding coils on toroids, connecting wire, solder, metal case if required, suitable 18V DC power supply, two audio connectors as desired.

NOTE: Resistor wattage ratings and capacitor voltage ratings are those used for our prototype. Components with higher ratings may generally be used, providing they are physically compatible. Components with lower ratings may also be used in some cases, providing ratings are not exceeded.

characteristics obtained with the five capacitor combinations shown in the circuit. Note that the combinations giving the two lowest turnover frequencies produce peaks of between 2 and 3dB just before roll-off. This gives a small amount of ringing, which appears to improve intelligibility.

The capacitor combinations shown give approximate turnover frequencies of 8, 6, 4.5, 3 and 2.5kHz respectively, together with the "flat" characteristic. These provide quite a lot of flexibility, and should cope with most requirements. However if you want a turnover frequency between any of these figures, or above 8kHz, this can be achieved simply by a suitable choice of capacitor values. Note that the value of C1 (in series with L2) is roughly 50% higher than that of C2.

Having used this filter for a while now, I am able to verify that the sort of characteristic it provides can be very worthwhile in improving the reproduc-

tion from poor sound tracks. Providing the film is not too atrocious, the filter allows quite a good compromise to be reached between noise and bandwidth.

I must admit, though, that there still tends to be a problem with the very worst tracks—like that which started me off on this present foray. This is because with such films there is a basic conflict: the filtering which would be necessary to reduce noise to an acceptable level would also render the signal unintelligible!

Fairly obviously, no "static" filter of the type just described could cope with this sort of situation. If there is any possible solution to the problem, it lies in dynamic filtering: the use of a filter which changes its characteristics depending upon the presence or absence of signal.

I have been experimenting with a filter of this type, used in conjunction with the static filter just described, and the results seem promising. Details will be given in the third and final article in this series.



# Using the LM3900 quad op-amp IC

If you're working with circuits using op-amps, then you're at a disadvantage if you don't know about the National Semiconductor LM3900 IC. It offers no less than four op-amps in a single low-cost package, and although these use a slightly unfamiliar "current difference" input circuit, they can be used for many common applications.

by J. BRIAN DANCE, M.Sc

One of the most economical linear integrated circuits available at the present time is the National Semiconductor LM3900 device. Although the retail price of this IC is only around \$1.75, it incorporates four separate amplifiers which are designed to operate from a single power supply line. They can be used in a wide variety of applications, from waveform generators to phase-locked loops, and produce a large output voltage swing.

## Encapsulation

The LM3900 is encapsulated in a standard 14 pin dual-in-line case with the connections shown in Fig. 1. The characteristics of the device are specified over the temperature range 0°C to 70°C, but a similar (marginally more expensive) device, the LM2900, can operate over the range -40°C to +85°C.

## Inputs

Each amplifier of the LM3900 has a non-inverting input (marked +) and an inverting input (marked -), but the input circuit is different from that of conventional operational amplifiers. The output voltage depends on the difference between the two input currents rather than

the difference between two input voltages.

The special symbol recommended for current differencing 'Norton' amplifiers of this type is shown in Fig. 2. The use of this symbol avoids confusion with other types. The arrow on the non-inverting input shows this is a current input.

The two inputs of each amplifier are kept at one diode voltage (about 0.5V)




FIG. 2

above the potential of pin 7. Input voltages must be converted into currents by series resistors in the input circuit; for optimum stability, metal oxide or metal film resistors should be used.

The LM3900 can be used over the wide power supply range of 4V to 36V; its amplifiers provide outputs which can vary between 1V less than that of the positive line and a fraction of a volt above

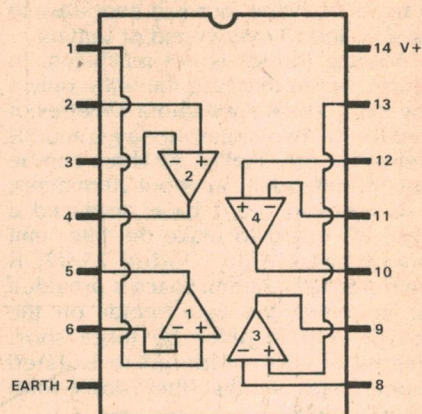


FIG. 1


ground potential. Alternatively, one can feed the device from balanced supplies of between  $\pm 2V$  and  $\pm 18V$ . The supply current is typically 6.2mA (max. 10mA) when the output current from each of the four amplifiers is zero; this supply current shows little variation with the supply voltage or with temperature.

The LM3900 may be damaged if the power supply is connected with the wrong polarity. The shorting of one of the outputs to ground or to the positive supply will not cause immediate damage, but may result in excessive heat dissipation and damage within a short time.

For simplicity, the power supply connections to pins 7 and 14 of the LM3900 will not be shown in the following circuit examples.

## Simple Amplifiers

The simple inverting amplifier shown in Fig. 3 can be used at audio or higher frequency and provides a gain of  $R_2/R_1$  ( $=20$  with the values shown). If one wishes the quiescent output voltage to

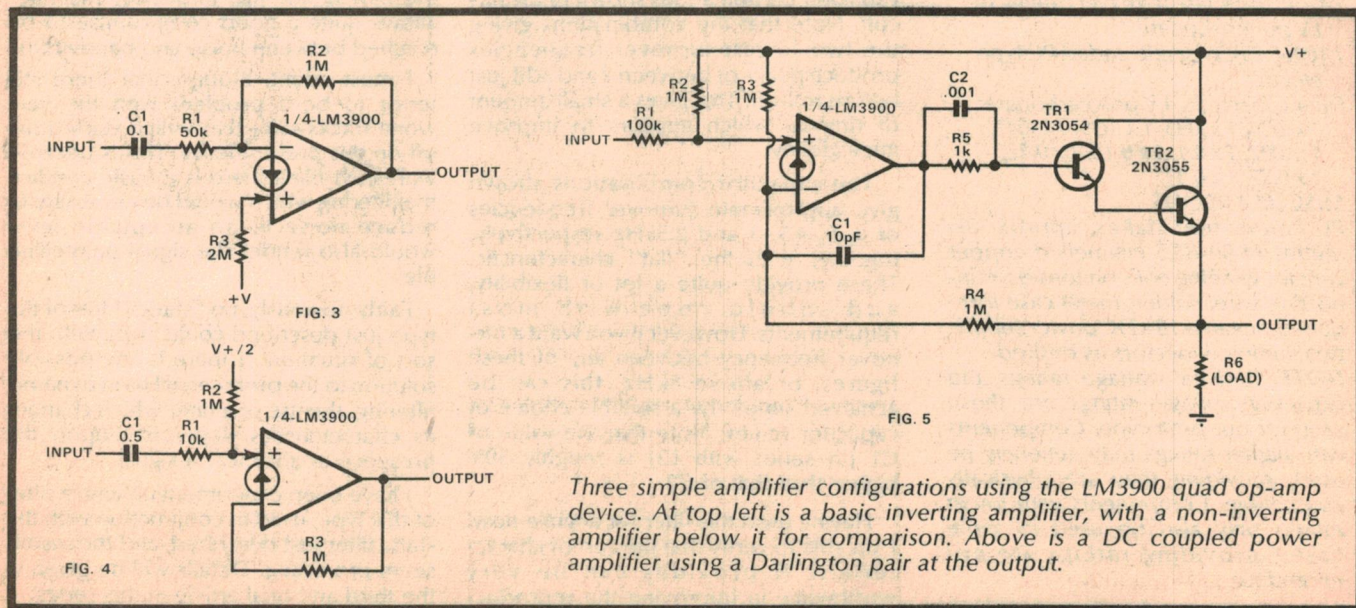

Three simple amplifier configurations using the LM3900 quad op-amp device. At top left is a basic inverting amplifier, with a non-inverting amplifier below it for comparison. Above is a DC coupled power amplifier using a Darlington pair at the output.



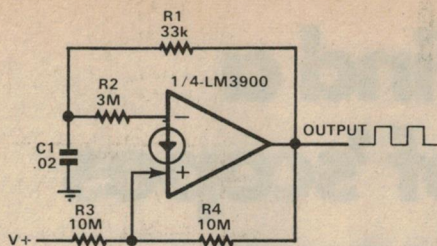


FIG. 6

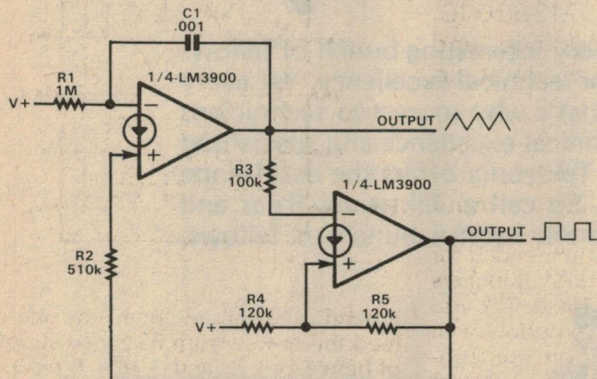


FIG. 7

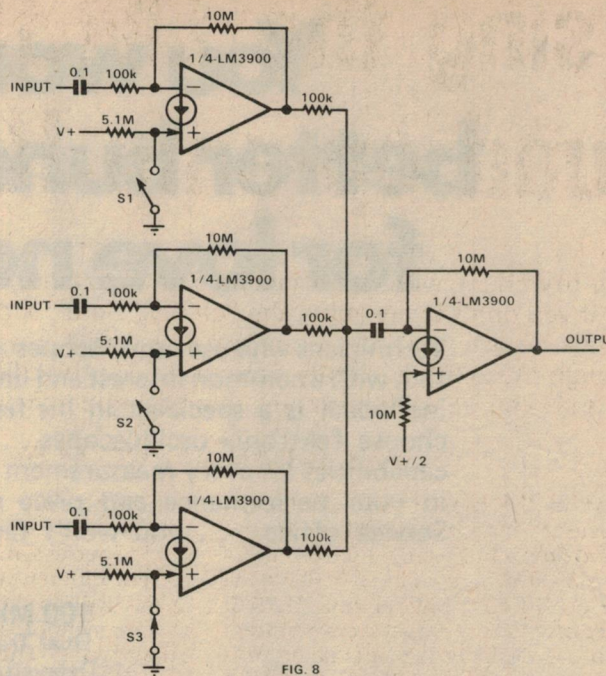


FIG. 8

Three more useful applications of the LM3900 device.

be half that of the positive supply line, the value of R3 should be twice that of R2. However, the value of R3 can be selected to provide any quiescent output voltage within the device range. The gain-bandwidth product is 2.5MHz for the Fig. 3 circuit.

The effect of power supply hum can be greatly reduced by returning R3 to a decoupled supply. For example, one may employ a value of R3 equal to R2 and return R3 to a decoupled supply of  $V+/2$ .

A non-inverting amplifier is shown in Fig. 4. The gain is  $R1/R3$ , or 100 with the values shown, and this gain can be obtained up to 1MHz. R2 and R3 should be equal for a quiescent output voltage of half the supply voltage. The lower end of R2 may be connected to the junction of two 47 kilohm resistors which are connected in series across the supply lines; this junction should be decoupled with an electrolytic capacitor. This decoupled supply may be used to supply any reasonable number of amplifier stages.

In the circuit of Fig. 5 the LM3900 amplifier output is fed to a high current Darlington amplifier. The output transistor should be mounted on a heat sink, in which case output currents of over 3A can be obtained.

#### Square Wave Generator

In the circuit of Fig. 6, the capacitor C1 alternately charges and discharges via R1 between voltage limits which are set by the other resistors. The circuit is basically a form of Schmitt trigger which, with the values shown, produces a square wave output of frequency about 1kHz.

The circuit of Fig. 7 employs two of the

LM3900 amplifiers to generate square and triangular waves simultaneously. The amplifier on the right hand side operates as a Schmitt trigger circuit, whilst the other amplifier operates as an integrator. If  $R1 = 2R2$ , the waveforms will be symmetrical. The frequency is inversely proportional to C1 and R1.

#### Audio Mixer Unit

Fig. 8 shows the use of the four amplifiers of an LM3900 in an audio mixer unit. The amplifier on the right hand side sums the outputs from the other three amplifiers. When the switches S1 and S2 are in the open position (as shown), the current flowing through the 5.1M ohm resistors will saturate these amplifiers and only the third input will contribute to the output signal, S3 being closed.

#### Conclusion

Many further applications of the very versatile LM3900 quad op-amp device are given in the National Semiconductor Application Report AN-72; they include voltage regulation, active filters, staircase waveform generators, digital circuits, tachometers, voltage controlled oscillators, etc.

The LM3900 is available from most suppliers, including Dick Smith Wholesale Pty Ltd, 160-162 Pacific Highway, Gore Hill, NSW 2065.

#### EDUC-8 HANDBOOK

This latest addition to the E-A handbook series provides all of the published articles on the EDUC-8 do-it-yourself computer system, together with useful supplementary information. Price \$3.00 plus 60c post and packing from Box 163, Post Office Beaconsfield, NSW 2014.

ALL ELECTRONIC  
DIGITAL WATCH

**MICROMA**

BUY DIRECT FROM  
THE IMPORTER



**SAVE OVER 50%**  
\$125 men's gold rhodium  
or stainless  
Ladies' also available

**ADE**

**ANDERSON  
DIGITAL  
ELECTRONICS**

P.O. BOX 322  
MT. WAVERLEY, VIC. 3149  
(543-2077)



# You won't find a better bunch of 'scopes for love nor money.

Technicians who use oscilloscopes are a very interesting bunch of fellows too, with a common interest and desire for technical excellence. Yet every individual is a specialist in his field. That's why more top technicians choose Tektronix oscilloscopes . . . technical excellence and specialised capabilities for every measurement task. Tektronix offers the best 'scope in your performance and price range. So call a Tektronix Sales and Service office . . . you won't find a more helpful bunch of fellows.

## 100 MHz 465

Dual Trace 5 mV  
Delayed Sweep 5ns  
Bright 18 KV

## 10 MHz D61

Dual Trace. 10 mV  
T.V. Triggering facilities.  
Bright 3.5 KV

## 50 MHz D83

Dual Trace. 5 mV  
Delayed Sweep  
Bright 15 KV



## 25 MHz D66

Dual Trace. 1 mV  
T.V. Triggering  
Bright 10 KV



# TEKTRONIX®

committed to  
technical excellence

Tektronix Australia Pty. Limited, 80 Waterloo Rd., North Ryde N.S.W. 2113  
SYDNEY 888 7066 MELBOURNE 81 0594 ADELAIDE 223 2811 PERTH 217 8855 BRISBANE 31 2896



# RF dummy load

Here is a very useful accessory for the radio amateur. Although easily built up in a couple of hours, it can be almost invaluable when testing transmitters. If you're a Novice just starting to equip your "shack", it would be well worth building.

by IAN POGSON

It is necessary sometimes to make prolonged tests on an amateur radio transmitter, and as the regulations do not allow a transmitter to be fed into a radiating aerial for such tests, it becomes necessary to use an "artificial aerial", "dummy aerial", or a "dummy load". All three names mean the same thing in this context. They describe a device which when connected to a feedline from the transmitter, looks the same as a properly adjusted aerial system. Ideally, this will be a pure resistance, in the range 50 to 75 ohms and capable of dissipating the full amount of RF power output from the transmitter.

If the power to be dissipated is only 10 watts, or even less, then the traditional way of producing an economical dummy load is to use 12 or more 1 watt non-inductive resistors connected in a series-parallel arrangement. For power ratings up to 100 watts or so, a suitable number of larger resistors similarly connected, to give the required 50 or 75 ohms, can be a satisfactory arrangement.

The power dissipation capability of a dummy load can be increased quite markedly by immersing the resistive elements in a suitable oil. It is also possible to add a metering circuit across the

dummy load to measure the actual amount of power being dissipated by the load, which also corresponds to the power output from the transmitter under test.

An alternative type of dummy load is one which uses a resistive element specially designed for the job. An example of this is a 50 ohm, 50 watt resistor imported by Dick Smith Electronics Pty Ltd. This resistor is in the form of a ceramic tube, with the element deposited on it and with about 12mm at each end metal sprayed to allow contact to be made. There are no signs of spiralling and the type of construction should result in a resistor with very low inductance. Made by Sankyo Tokusyu Musen, of Japan, it is designated the "Erema type SP".

Having acquired the resistor, the question arises as to how best to arrange it for use as a dummy load. Possibly the most convenient form is to mount the element in some sort of metal enclosure. This makes it easy to handle and it also gives a considerable amount of shielding, which will further reduce the possibility of radiation. While this arrangement also reduces the heat dissipation if the element is simply mounted "in air", it

also makes it possible to immerse the heat element in oil and this more than offsets the former disadvantage.



We solved the problem of a suitable container by raiding the kitchen cupboard, coming up with an empty "Oval-tine" tin. This tin which has a press-on lid, is about 98mm in diameter and 120mm high. This turned out to be just high enough to give sufficient end clearance to the resistor and mounting arrangement. While the diameter is perhaps a little more than necessary, it allows for a good quantity of oil if it is used, and the power dissipation will be increased accordingly.

A one litre paint tin should also be suitable—but choose one which can be cleaned out. A water-based plastic paint would be a good choice, allowing the tin to be cleaned out very easily.

The way the problem of mounting the resistive element was solved may be seen from the picture and the drawing. Unless you have ideas of your own, we suggest that you follow the method used in the prototype. This is how we did it.

Basically, there is a clamp at each end of the element. Each clamp consists of two parts as shown in the drawing. The blank size of each piece is 48mm long and 13mm wide. Each piece is bent up as shown, using the end of the resistor to obtain the correct radius. The clamps are then screwed to the resistor and the other pieces made and soldered to the clamps.

Our clamps and other pieces were

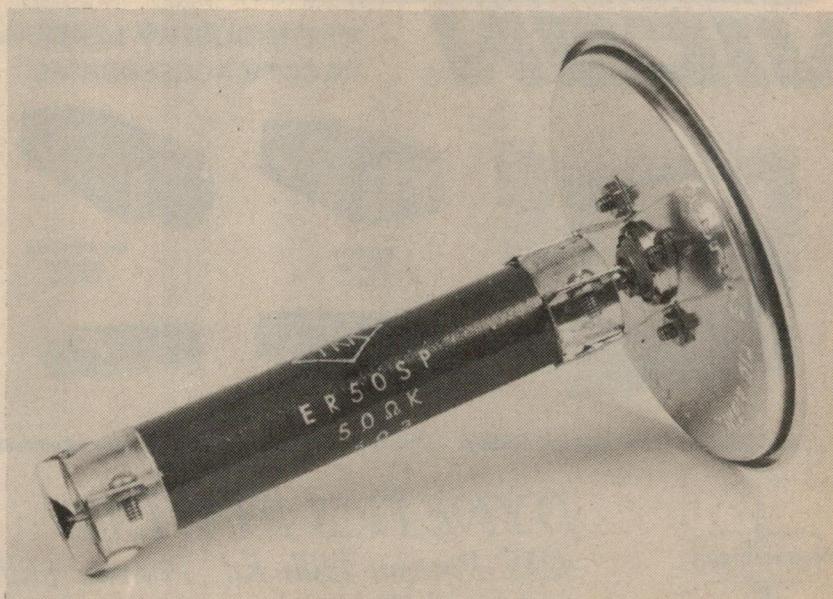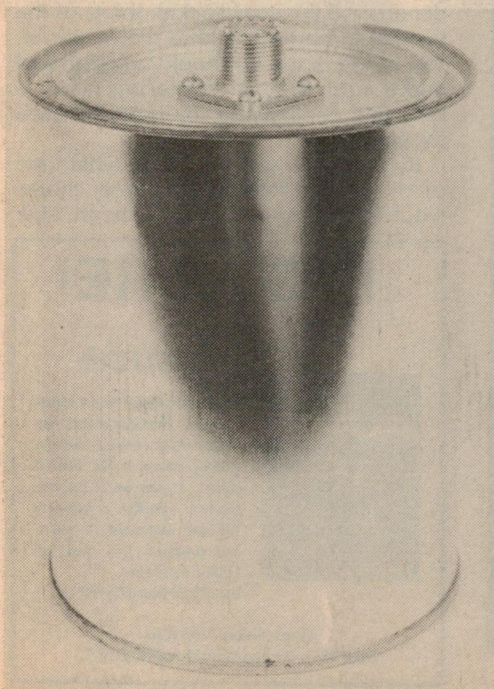


Shown in these pictures is the 50-ohm dummy load, using a single 50-watt load resistor made by Sankyo Tokusyu Musen in Japan. The tin provides shielding and holds cooling oil, if this is used.






Rugged Environmental Pan and Tilt. Four models to choose from.

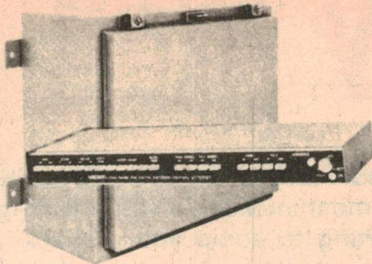

Long Distance Control through the use of Pulse Modulated Signals over simple twisted pair cabling for miles distant remote operation.

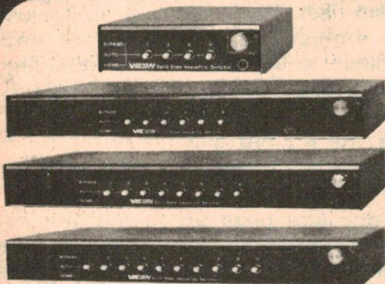

Sequential Switchers. Solid State, 4-6-8-10 position. Desk Top or Rack Mounted. This Switcher does everything.



Controls of every description: Preset, Remote Setting, Auto Readout Multiple Function, etc.



Distribution Amplifier. Signal Power for 40 Monitors



Video Amplifier. Long cable run compensation.



Time and Date Generators in many various versions. Image Motion Detectors.

## RF dummy load

made up from pieces of tinfoil, salvaged from another tin. This is cleaned up and the pieces are cut out with a pair of tin snips. If you are lucky enough to have access to some thin sheet copper or brass, then this may be used instead of tinfoil.

The type of coaxial socket which you use will be up to your own preferences; no doubt one which you have standardised on for all coaxial connections. The socket is fitted to the lid of the container and the resistive element mounting brackets can hopefully make use of the same screws.

Prior to finally mounting the element assembly, a lead must be provided to run from the centre terminal of the socket, to the far end of the resistor. This lead may be a stout gauge of tinned copper wire but the inductance of the lead may be reduced by using either a strip of copper, or this may be simulated by soldering together three or four pieces of 18 or 20 gauge tinned copper wire to form a flat strip.

The assembly, fitted into the container, is at this point, the basic unit and may be used as a dummy load on small transmitters such that the dissipation can be handled comfortably. On the other hand, if you want to take it further and to handle higher power, then further work must be done to make it suitable for oil cooling.

A hole is drilled in the lid, alongside the socket, to clear a screw about 4BA size. A nut is soldered to the outside of the lid and over the hole. With a screw in this nut, the arrangement is a simple pressure-relief device. To reduce the possibility of oil leaks to a minimum, solder around the coax socket. Joints of the tin should be filled with a run of solder. The inside of the tin should be clean and make sure that all soldering resin is removed. Methylated spirit may be used for cleaning.

By now, you will be asking what kind of oil to use. Perhaps the best choice would be transformer oil, if you are able

# VICON®

'THE INDUSTRY LEADER  
IN CCTV ACCESSORIES'



Economy  
Vidicon  
Camera



Low Light Level  
Industrial  
Camera




Send for our free catalog today. (Please enclose your company or agency letterhead)



**DYNETICS PTY. LTD.**  
425E Pennant Hills Rd., Pennant Hills.  
N.S.W. 2120 • phone 848-9055

## IT'S HERE!


### EDUC-8




The latest addition to our highly respected handbook series has arrived. Besides being a complete working manual to the EDUC-8 system, it gives an insight into computer operation in language you will understand. If you're into computers, you need the EDUC-8 handbook.  
Only \$3.00 (plus 60c P&P).

Electronics Australia  
Box 163, Beaconsfield NSW 2014.



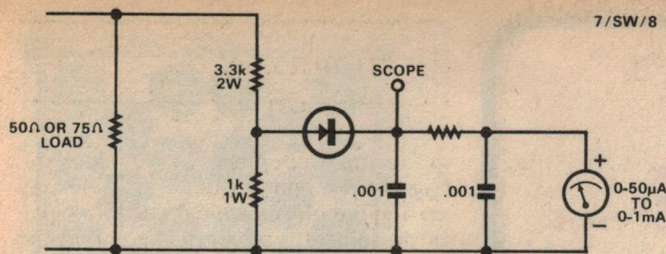

Use the circuit above as a guide if you want to add a detector to your load for relative power measurements. The diagram at right shows the metal clamps used for the 50-ohm load resistor.

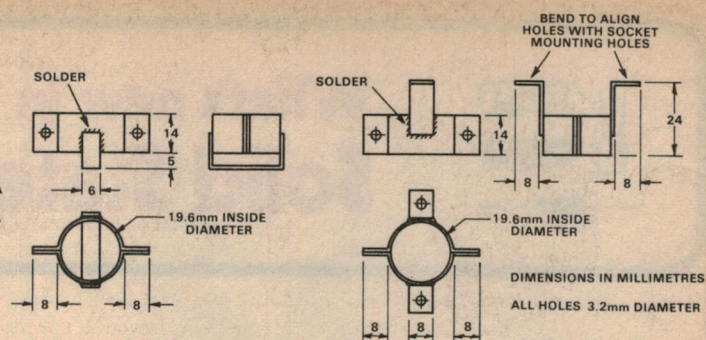

to obtain a small quantity. On the other hand, when we described a dummy load way back in May, 1967, we suggested that Castrol Z10 could be used. We have just been in touch with Castrol and they advise us that the Z10 is no longer available. However, they suggest that an alternative may be Castrol TQ (Dexron), which is an automatic transmission fluid. We have not tried it at this stage, but it seems to be a good possibility.

Quart packs of Castrol TQ (Dexron) may be obtained from Repco Auto Parts Pty Ltd, Grace Bros, and possibly other automotive houses.

The idea of using light motor oil should be approached with caution, as the additives may adversely affect its use for our purpose.

If it is your intention, now is the time to fill the container with oil to a level that will cover the resistor body, making sure to leave some space for expansion. When the lid has been fitted and when satisfied that all is well, it is a good idea to fix the lid with a couple of blobs of solder. This will prevent the lid from being accidentally removed, with possible unpleasant results!

So far, we have only considered the needs of those who use a nominal 50 ohm transmission line system. What about those who have settled for a 75 ohm system? Unfortunately, the answer to that one is that no 75 ohm resistor is available similar to the 50 ohm one just discussed. There is an alternative of course and this was touched on at the beginning of this article. The well tried idea of placing a number of resistors in parallel between two plates, or other similar conductors, can be put to good use where a 75 ohm system is required.

A 75 ohm dummy load along these lines was described in May, 1967 and to make the treatment complete, we will repeat brief details of this unit. Unfortunately, the availability of suitable resistors has changed considerably in recent times and it will be largely up to each individual to find resistors which will suit the particular application.

Using our former prototype as a guide, using seven 8 watt resistors, to obtain 75

*If you need or want a 75-ohm load, this is still the way you'll need to build one. Use a number of suitable power resistors, connected like this for low inductance.*

ohms it may be arrived at by using three 470 ohm resistors in parallel with four 560 ohm resistors. This gives just under 74 ohms, which is close enough for most purposes. Resistors of the above values and rate at between seven and ten watts should meet most requirements—in air for lower dissipation requirements and immersed in oil for higher power.


The picture shows a typical dummy load. This one was made up for ordinary high frequency use but if you wish to use one into the VHF range, then it would be wise to keep lead lengths as short as possible and to use a metal plate at the end, rather than radial leads.


Now that we have a dummy load, it is possible to extend its use beyond that whereby it is simply used to dissipate power from a transmitter. By adding some extra circuitry and components, it is possible to obtain an indication of relative output from the transmitter, as indicated on a meter. Furthermore, if one goes to the trouble to calibrate the instrument in terms of voltage across the load, the power output from the transmitter can be readily arrived at. And if the load is to be of a constant value (either 50 ohms or 75 ohms) then the meter may be calibrated directly in terms of power.

As a guide, a suggested circuit is given. Because small signal diodes are somewhat limited in their reverse voltage


rating, this restriction may be overcome by placing a voltage divider across the load. The value of the divider is high compared with the load resistance and so it may be disregarded as far as its effect on the load resistance is concerned. For HF and VHF up to about 150MHz, an ordinary germanium diode, such as the OA91 may be used as the rectifier. For higher frequencies, a hot carrier diode should be used. The series resistor in the filter and metering circuit should be a value such that full scale reading is not exceeded under likely maximum power conditions. With these criteria met, the meter will give relative readings of output power.

If you wish to calibrate the meter in terms of RF volts, then perhaps the most convenient method for the average person would be to calibrate it against a known AC voltmeter, at 50Hz. The two .001uF capacitors should be increased temporarily to 1uF or higher and the series resistor may be adjusted to give a full scale reading when 100V AC is applied. The extra capacitors should be removed after this operation.

Still another application is available. At the point marked "scope", an oscilloscope may be connected. This allows the modulation envelope to be checked, so that you can make sure your signal is clean and linearly modulated. 

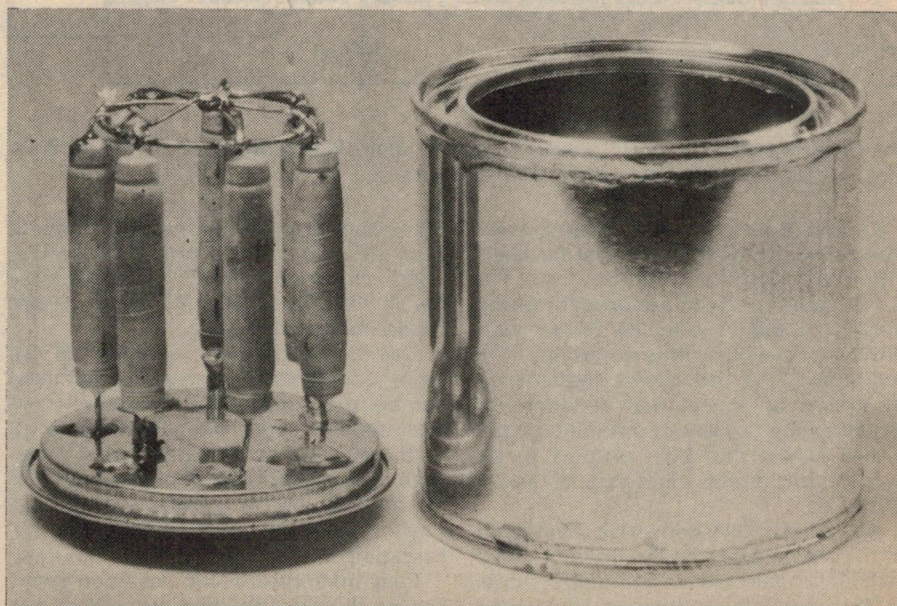





## What's new in Solid State

### Very flexible timer IC, active filter

First item this month is an LSI timer device which uses digital counting to provide precise long-period time delays. Known as the LR171E, it is made by a firm called Elremco in Essex, UK. Apparently it has been designed both for industrial process timing and for domestic use in washing machines, cars, battery chargers and similar applications.

The circuit for the LR171E is shown below. Essentially it consists of an RC clock oscillator whose frequency is set by external components  $C_t$  and  $R_t$ , and whose output is fed to a digital counting chain consisting of 12 flip-flops. Logic circuitry detects when all FFs have been set (after 4096 clock periods), and provides an output signal at pins 3 and 4. Time periods up to 24 hours are readily obtained.

movement, to give convenient display of lapsed time during the timing cycle.


The LR171E has its own internal supply regulators, and will operate from voltages anywhere between 6 and 450V DC merely by changing the series resistor value.

Triggering of the device may be from switch contacts, TTL gates, an LDR or any similar source. The device is readily protected against noise for operation in industrial environments.

Suggested applications for the LR171E are for automatic battery chargers, and for control of parking lights, headlights, and windscreen wipers in cars.

Local agents for Elremco are A. J. Ferguson Pty Ltd, of 29 Devlin Street, Ryde, NSW.

Another interesting new IC is a device

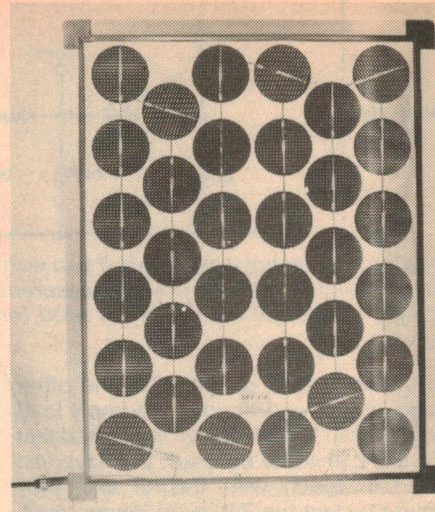

Philips Elcoma has released an improved version of its solar cell array, this BPX47A. Changed construction gives it a higher efficiency and 10.7W output at 25°C.

it will apparently operate to 10kHz with a realisable Q range to 500. Power supply range is from  $\pm 5V$  to  $\pm 18V$ , and the frequency accuracy is quoted as 1% unadjusted.

Another new device from National is a precision reference IC, the LM199, which they claim to be 20 times more stable than zener diode references.

Basically the LM199 consists of a zener derived reference circuit on the same chip as a temperature control circuit. The latter operates from between 9 and 40 volts DC, and dissipates only 300mW.

The zener element in the reference circuit of the device is a subsurface breakdown type, in which breakdown is forced to occur well below the chip surface. This eliminates the surface-related instabilities that plague other zeners.


The performance specs of the LM199 are very impressive. Long term stability of its nominal 6.9V output is .002%, with drift less than 1ppm/°C. The zener output impedance is half an ohm, making it two orders of magnitude less sensitive to operating current than a standard 7.5V reference zener. A 1% change in operating current at 1mA changes the voltage by only 5uV, compared with about 1200uV.

The LM199 comes in a four-lead TO-46 hermetic metal package. Price of the premium device is around \$35 in 100-off quantities, but an industrial grade version called the LM399 is available for around \$3.25 in similar quantities.

Applications for the LM199 include a standard cell replacement, a precision clamp and a portable calibrator.

National Semiconductors are available locally from NS Electronics Pty Ltd, cnr Stud Rd and Mountain Hwy, Bayswater, Vic. (J.R.)

For further data on devices mentioned above, write on company letterhead to the firms or agents quoted. But devices should be obtained or ordered through your usual parts stockist.

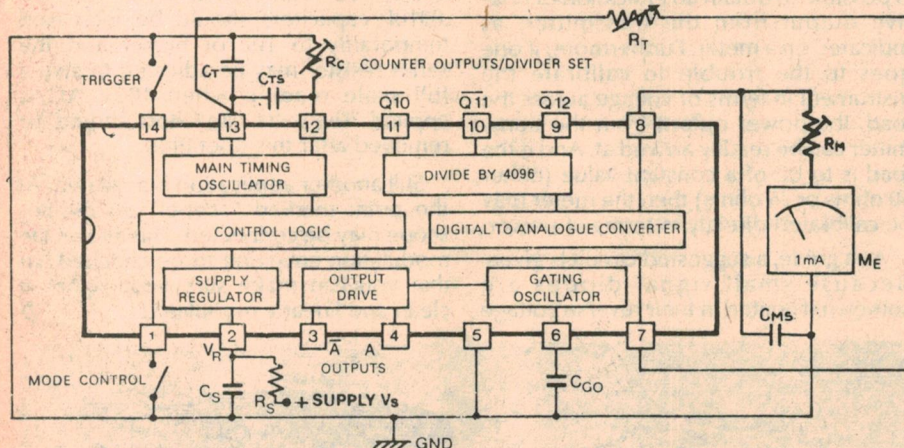

The Elremco LR171E timer IC, which is capable of providing precision timing periods of up to 24 hours duration, simply and at low cost.

To this basic system are added a few frills, which provide additional facilities. The Q-bar outputs of the last three FFs in the counting chain are brought out at pins 9, 10 and 11, and this allows subdivision of the basic time period into T/8 segments. This also allows sequencing, by means of an external decoder. An inbuilt gating oscillator controlled by pin 6 also allows the main outputs to be pulsed, for direct triggering of Triacs and SCRs.

An internal D-A converter connected to the last 6 stages of the counter chain provides a staircase current output at pin 8. This is suitable for driving a 1mA meter

from National Semiconductor which they describe as a "universal active filter". Designated the AF100, it is available in either a 14-pin DIL or a 12-pin round metal can package.

The device contains four internal op amps, connected in such a way that they can be programmed for any of the classical second order filter configurations with only four external resistors. Low, high and bandpass functions are available simultaneously at separate outputs. Higher order filters may be realised by cascading a number of AF100 devices.

Only brief information has been given for the device at the time of writing, but



# DICK SMITH

## Mini Catalogue

Christmas 1975



### Dick Smith Electronics Pty Ltd

Associated Companies: Dick Smith (Sales) Pty Ltd, Dick Smith (Wholesale) Pty Ltd,  
Electronic Enthusiasts Centre  
Car Radios : Hi Fi : Tools : Books  
Kits : Amateur Radio  
Electronic Components  
162 Pacific Highway, Gore Hill,  
P.O. Box 747 Crows Nest 2065 N.S.W.  
Tel: 439 5311 (5 lines)  
24hour STD: 439 5344

*Dear Customer,*

In the next few pages we are presenting a whole lot of new products. There are too many for our usual adverts, so we decided on the Mini-Cat to save the eyestrain some of you suffer from.

To cope with all these new products and the still growing number of customers, we have recently taken over a new 4,000 sq ft warehouse which will house our mail order and kit departments.

The fact that our business continues its dynamic growth is proof enough that our customers enjoy dealing with a truly Australian organisation that is geared to their needs. Our staff now totals 48 and a large percentage of them are dedicated electronics enthusiasts too.

Our whole business has been built on the fact of service - this was the reason I set it up to begin with!

13 people YES!! We will continue to give the best possible mail order service. We have just as good a deal as counter customers. That's why we try to cram as much of the latest news into our adverts as we can!

YES!! We give this service half that cost.

YES!! We will continue selling individual items. We avoid prepackaging unless it means real benefits to you - as in our computer selected resistor and capacitor packs.

YES!! We're still looking for new ideas. We crashed the price of digital clocks. We almost gave away transistors. Our special offer packs in E.A. lasted just 2 days. To satisfy the mail orders we had to negotiate for enormous extra quantities.

YES!! We're project orientated. We co-operate with magazines to get the parts you need, we try to help them with helpful suggestions. We often have to search for substitutes.

YES!! As a service to our growing number of professional customers we have installed a Telex for your convenience. We also now have a special Tax-Free price list.

YES - WE'RE DEDICATED TO GIVING YOU SERVICE!!

That's the difference, we're 100% Australian.

But can I make my usual plea? Just because we're Australians, it doesn't mean we can understand everyone's handwriting. SO PLEASE PRINT YOUR NAME AND ADDRESS.


Now once again it's over to you!

FREE BUMPER CHRISTMAS  
PULL-OUT




# NEW TOOLS


**No. 201 Transistor Nippers** Intended for professionals, these low cost cutters measure 115 mm long with 14 mm edge. \$3.50




**No. 200 Cutters** Large rivet joint to prevent twisting. Fine sharp edges with smooth cutting side. Measure 125 mm with 18 mm cutting edge. \$4.20




**No. 100 Diagonal Cutters** Feature box joint for more rigid support of the jaws which won't twist or distort. Very fine, sharp and keen cutting edge. Perfectly forged and tempered. Measure 125 mm with 22 mm cutting edge. \$4.75




**No. 110 Diagonal Cutters** Box joint. Cutting edge has two handy wire stripping holes (1.2mm and 1.6mm dia) 125 mm long with 22 mm jaws. \$4.50




**No. 300 Long Nose Cutting Pliers** For general and all round use. Rigid tip for heavy work. Serrated jaws with flat and curved edges. Built in cutters with wire stripping hole. 150 mm long with 50 mm jaws. \$4.50



**No. 310 Long Nose Cutting Pliers** Fine tip and serrated jaws for general use. Budget priced. With built in cutters 125 mm long with 40 mm jaws. \$3.75




**No. 400 Flat Nosed Pliers** Have completely smooth jaws. Ideal for precision instrument repairs or where serrated jaws could cause damage. Chromium plated. 145 mm with 42 mm jaws. \$3.75

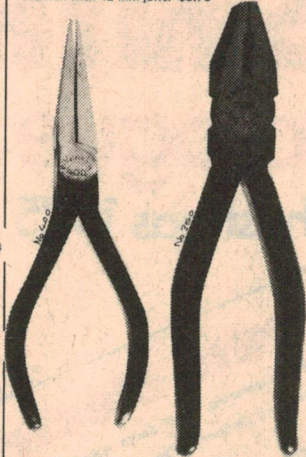

**No. 350 Side Cutting Pliers** For linesmen or general use. High quality gunmetal. Polished finish. Flat serrated jaws with wire cutters. 155 mm long with 25 mm jaws. \$3.75

**No. 520 Combination Plier.** Drop forged steel, all purpose tool often found in auto tool kits. Sliding type joint to deal with various sizes of nut etc. Flat and round jaw 160mm long \$2.50

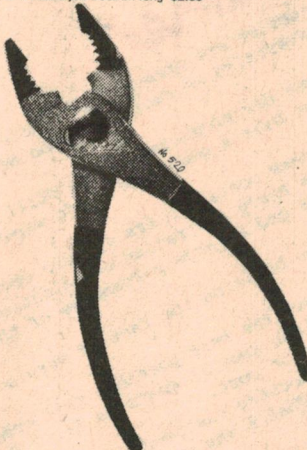


**SPECIAL TOOL PURCHASE**  
The search for new products is never ending and tools are one of the important areas we are constantly checking. Just look through this new range and their incredible low prices. It must all add up to good value.




**EN3 Precision Cutters** A really high quality professional tool. Intended for transistor and IC work. Spring-loaded handle. Box joint. 110 mm long with 15 mm edge. \$6.75


**No. SC-6 Soldering Iron Stand** Folds flat. Stand takes your iron and saves it melting insulation or burning the bench. Unscrew heatproof sponge for cleaning the tip. 65mm dia. \$2.50

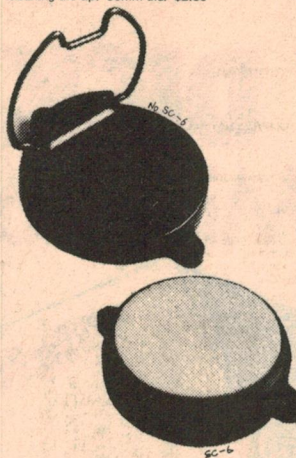


**No. SA50 Soldering Aid Set** Five handy aids in a vinyl wallet. Hook + angled reamer, scraper + straight reamer, Fork + stainless steel brush, bristle brush and a heat sink plier. If you build a lot of projects you'll need this one \$3.50

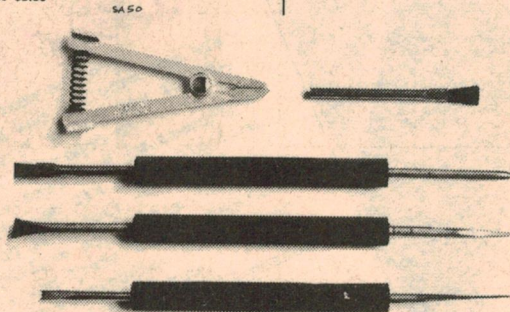


**No. SA7 Heat Sink** Neat little pliers grip heat sensitive leads. High conductivity aluminium construction. Two in a pack are straight one angled 75mm long. \$1.20




**EN4 Flat Nose Pliers** Companion to EN3. Flat jaws. Spring loaded jaws. Box joint for greatest rigidity. 110 mm long with 24 mm jaws. \$6.50




**No.77 Pin Vice** For machinists, toolmakers, jewellers, as well as hobbyists. Holds small drills, taps, etc. Hardened steel jaws. Two chucks grip up to 2.5mm dia. \$3.50




**No.77-5 Pin Vice** Chrome plated with double ended chuck and 3mm capacity \$4.00




**No. 66 Pearl Catch** For reaching into awkward corners. Virtually 3 pronged tweezers with syringe action. A must for retrieving nuts and washers. Keep your cool for \$1.00




**No. 667 Allen Key Set** 7 keys in vinyl wallet. From 1mm to 4mm approx. only 80¢




**No. 780 Reamer** For you chassis-bashers. This is a beaut tool for enlarging and finishing off holes. Tapers from 4mm to 22mm dia. With Tommy bar \$2.75

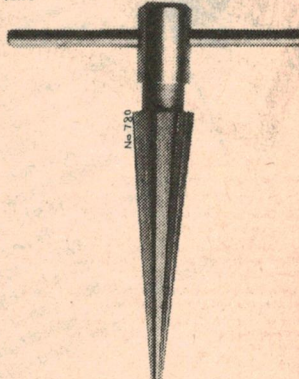

**No. 705 Needle file set** Five handy files - Triangle, square, round, half round and flat. In plastic wallet. 185mm overall length. \$3.50



**No. 88 Tweezers** Not just for removing splinters. Ideal for locating small nuts etc. Pointed type AA5 75¢ Serrated jaw type KS 65¢




## DICK SMITH



Screwdrivers are made of hardened and tempered tool steel and nickel plated. Handles are amber plastic, unbreakable, flameproof and shockproof and will withstand 15kV.

No. 81 Screwdriver 6mm blade in 3 lengths 150mm 50¢ 220mm 65¢ 310mm \$1.10.  
No. 81




No. 71 Screwdriver for Electricians 4mm blade in 2 sizes. 150 mm 40¢ 225 mm 45¢

No. 82 Cross-Type Screwdriver Philips type in 3 sizes 2½mm dia x 125mm 40¢ 4.5mm x 150mm 50¢ 5.5mm x 210mm 60¢



No. 41 Stubby Screwdriver 6mm blade 80mm long 60¢ or with Philips head 65¢ (state which).

No. 45 Minidriver An ultra miniature screwdriver for watchmakers and small grub screws. Better buy 2, they're so small you'll lose one!! 1.5mm blade. 55mm long. Flat or Crosshead (state which) 25¢

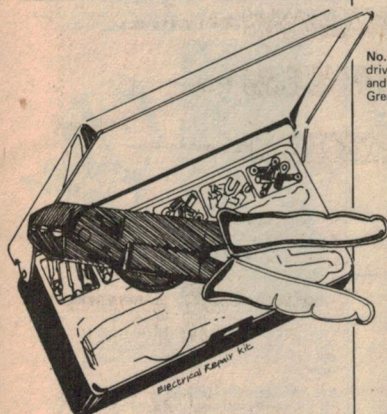

#### DON'T BE A LUG MUG !!

\*Why pay up to \$40.00 for similar crimping tool kits? YES! Dick has imported a great little Electrical repair kit that contains the following:


- 12 types of common basic colour coded and plated, copper solderless lugs & terminals for easy identification and trouble-free crimping.
  - Sturdy crimp tool (worth nearly \$8.00 itself) that doubles as a wire cutter & stripper.
  - Rugged plastic PVC snap-lock case with see-thru top & mounting brackets - hang it on the wall of your Workshop.
  - Large roll of PVC insulation tape.
- Everyone must have a No. 1331 kit for only \$9.75 (+75¢ p&p)




No. 705

No. 61 Serviceman's Screwdrivers 3 handy sizes - all useful!! A must for every toolbox. 3mm blades 100mm 30¢ 150mm 35¢ 250mm 40¢ (state which) or get the three for \$1.00


No. 376 Precision Screwdriver Set Six individual watchmaker quality drivers 0.9, 1.2, 1.8, 2.3, 3.0 and 3.5 mm blades in rigid plastic case. Beautifully made \$3.50

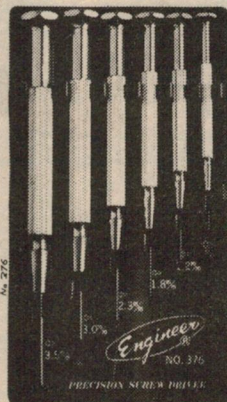



No. 626 Screwdriver Set Five individual serviceman's drivers. Nand and Philips blades. Watch repair driver and two spinnights - 3½mm and 6mm. Vinyl case. Great Value at \$1.75

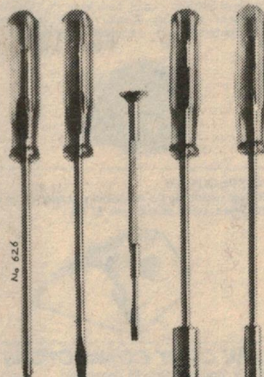

EL-1 SOLDER SUCKER Full metal construction - better than plastic!! With Teflon tip. Simple push/release thumb mechanism. Complete with nozzle-sweeper. (I) Only \$7.50 (Spare Teflon Tips \$1.50)



No. 516 Screwdriver Set Chuck type handle takes 6 'bits' Vinyl case. 3 and 5 mm screwdrivers. 2 sizes of Philips, plus 2 spirit lights 6mm and 8mm A.F. A handy set eh? \$2.75

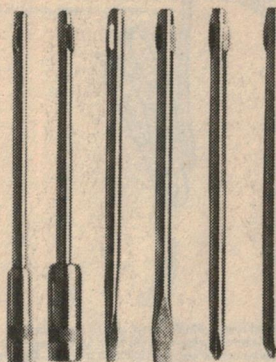

No. 711 Aligner An all plastic screwdriver with spring steel tip. Unbreakable plastic for I.F.s and trimmer alignment. 155mm long 2mm tip 60¢ 250mm long 75¢


No. 722 Aligner All purpose for I.F.s and Trimmers. One end has projecting tip other is recessed. Both are stainless steel 200mm long with 3mm blades 95¢



No. 744 Aligner Big, tough fibre screwdriver blade and recessed brass blade. 175mm long 5mm open blade \$1.75

#### UNIMAT MINIATURE MACHINE SHOP

What more could you need with the range of fantastic tools included with this machine? Complete kit includes: 240V, 95W motor with a speed range from 365 to 6000rpm. Faceplate, driving dog, vertical milling, drilling, surface grinding grinding arbor, 3 jaw self-centring lathe chuck, ¼" capacity drill chuck, grinding wheel guard, collet

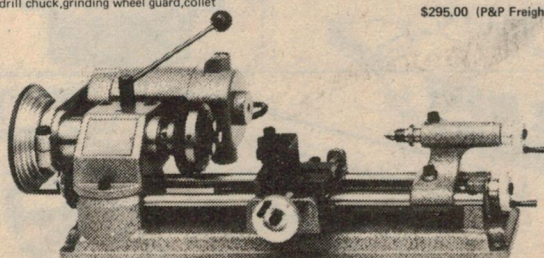


H9 SOLDER BULB A simple rubber bulb type solder sucker for de-soldering \$2.20




H3-C-R PULLER your extra hand for removing awkwardly located parts. Spring loaded to remove component as solder melts. Ideal for servicemen \$1.75



K88 NIBBLING TOOL cuts any shape opening in sheet steel to 0.6mm thick or light alloy to 1.5 mm. Easy to use, cuts plastics too without distortion. Follows scribe lines easily. Our catalogue price is \$9.50. Now a bargain at \$7.50




No. 733 TV Aligner Set Four all plastic tools for TV service work etc. All sorts of shapes guarantee that every core can be shifted!! \$1.75



#### FS-30 15Watt SOLDERING IRON

This beautiful little iron operates from any 12V supply. Yes ac or dc - so you can use it in the car or boat, or with a 12V, 1.2A transformer from domestic mains. Supplied with plated tip and 9ft lead. An ideal general purpose iron for home repairs etc. Terrific value at only \$ \$3.90 (P&P 75¢)

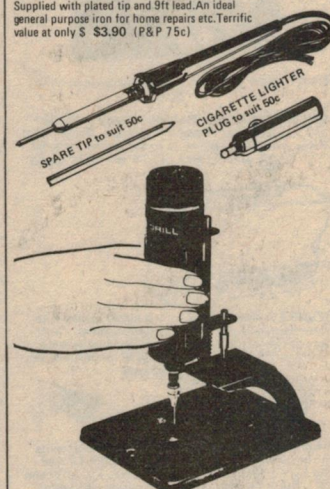

MINIDRILL PC DRILL runs off 4 UM3 cells or 6V d.c. at 600mA runs at 2500 rpm drilling holes from 0.0236 to 0.059" Ideal for all PC drilling, model makers, jewellers. This is a new line at \$15.75 (p&p 75¢)

And now... STD-50 MINIDRILL STAND Make your own Mini Stand Drill. Only \$8.50 (p&p 75¢)

holder and 5 collets from 1/16 to ¼". Also included is a set of tools, drills, milling cutter, lathe tools, counter sink bit and grinding wheel. PLUS 43 page techniques handbook. By offering this complete kit you make a saving of around \$20 on the tools. Highly recommended for the serious hobbyist, constructor, modelmaker etc.

\$295.00 (P&P Freight on)

# Mini~Catalogue



# TV. Accessories

## TV. RIBBON AND CABLE

**TV Ribbon and Cable** 300 ohm clear ribbon — designed for indoor applications — very low loss — maintains perfect balance.  
10¢ per Meter. \$7.00 per 100 meter roll

**300 ohm Black Ribbon** Especially designed for outdoor applications and long runs where an extremely low loss cable is required.  
13¢ per Meter. \$10.00 per 100 meter roll

**75 Ohm Coaxial Cable 3C2V** This cable is designed for television feeder systems. Excellent dielectric and suitable for use up to 400 MHz. 5/16" diameter, solid centre conductor and braided shield, black.  
30¢ per Meter. \$20.00 per 100 meter roll


## 300 OHM (Twin Ribbon) ACCESSORIES

**N9022—5029 4 Set Coupler** Handles colour, black & white, and FM signals with minimum loss of signal strength even when all 4 sets are operating at the same time. Compact plastic case can be mounted at any location near antenna lead in. 300 ohms input output impedance. \$3.50



**N9021—5028** Same as above but for two sets only \$2.50


**N5228 3 Way Antenna Switch** Attaches to the back of TV or any other convenient location. Gives instant 3 way switching — allows up to three antennas to be connected to one TV or FM set. \$3.50





**N1015 TV Antenna Clip** Strong plated springs with screw terminals and coloured plastic handles. Quick way to connect or disconnect antenna lead-in wires to TV set, FM radio, etc. Also ideal for portable sets. 40¢ each



**N4695—9068 AM/TV Splitter** The useful unit splits the incoming signal on a standard 300 ohm TV lead and gives 3 different outputs TV—VHF, TV—UHF and FM. This is the ideal unit for the person who wishes to operate his FM tuner from the normal TV aerial. \$3.50



**300 Ohm plug and socket set** designed to mount on wall or skirting board — for professional connection of 300 ohm twin ribbon. Complete with mounting screws. 50¢

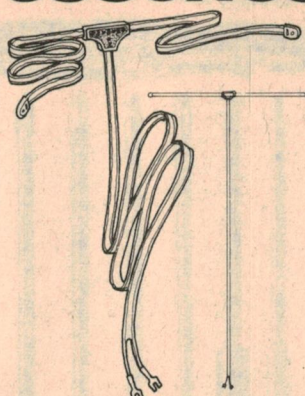

**N10020 Indoor FM Antenna** 300 ohm dipole FM antenna brings in good signals in all local areas. May be placed behind set, or hidden out of sight. Moulded ends make mounting easy. Long hook up lead terminates in spade lugs for simple hook-up to set. \$1.00

## 75 OHM (Coaxial Cable) ACCESSORIES

**9066 Set Balun** High quality, low loss ferrite balun for converting 75 ohm coax impedance to 300 ohm set impedance — designed to be mounted at rear of TV or FM set. Completely shielded and balanced. Also features AC blocking.  
1—9 \$2.00 10 up \$1.50  
(Requires one F59 connector)


**9052 Weatherproof Aerial Balun** Designed for indoor (TV set) or outdoor (aerial) mounting. This matching transformer converts from 75 ohm coax impedance to 300 impedance. Completely moulded construction and is supplied with rubber boot for weatherproof operation.  
1—9 \$2.50 10 up \$2.00  
(Requires one F59 connector)




**9067 Two Way Hybrid Splitter** This compact splitter provides two 75 ohm outputs from one 75 ohm input. Designed to provide two outlets from one TV aerial. Passes AC/DC power. Frequency response 5 to 300 MHz VSWR 1.3:1, insertion loss 3.5 DB, isolation 30 db.  
1—9 \$3.00 10 up \$2.50  
(Requires 3 x F59 connectors)



**9068 Three Way Hybrid Splitter** Designed to operate up to 3 TV sets from the one aerial. 75 ohm input, 3 75 ohm outputs, passes AC/DC power. Frequency response 5-300 MHz, insertion loss 5 db isolation 30 db. (Requires 4 x F59 connectors)  
1—9 \$4.00 10 up \$3.50




**9069 Four Way Hybrid Splitter** Four way 75 ohm VHF/FM/TV hybrid splitter provides four separate 75 ohm outputs from one 75 ohm input. Passes AC/DC power. Frequency response 5 to 300 MHz insertion loss 8 db isolation 30 db.  
(Requires 5 x F59 connectors)  
1—9 \$4.50 10 up \$4.00




**Coaxial Connectors & Adaptors** For all coaxial TV connectors we recommend the range of "F" type connectors. New to Australia these connectors are standard in many overseas countries including the USA. Their greatest feature is the fact that they require no soldering. When used with standard "3C2V" solid conductor — coax cable this connector retains a very high VSWR — far higher than normal connectors using screw terminals. They can also be easily connected and disconnected without the necessity of tools. This type of connector can only be used with solid centre conductor coaxial cable.

**F59 Male Cable Connector** For use with 3C2V and RG59/U cable. Mates with F61A and F81 connectors and all our series of splitters. Supplied with separate female for cable coupling.  
1—9 30¢ 10 up 25¢




**F61A Female Chassis Fitting** Accepts F59 connectors. Mounts in 3/8" diameter hole. Supplied with nut and washer.  
1—9 35¢ 10 up 30¢



**F81 Female Adapter** Mates with F59 connectors. The ideal way to connect lengths of coax without soldering and while retaining low VSWR.  
1—9 50¢ 10 up 45¢

**Lightning Arrestor 75ohm/300ohm** This lightning arrestor mounts on the mast near the aerial. Suits all types of lead-ins — coax, twin lead, etc. May be used indoors or outdoors. Simply run lead along arrestor and tighten screws — no soldering necessary.  
1—9 \$2.50 10 up \$2.00




**75 OHM OUTLET** Surface mounting Co-Ax outlet suitable for up to 850 MHz. Ivory plastic case. \$1.50



## LOW COST CONNECTORS

**Handy Insulated Coaxial Connectors** Moulded in tough, black plastic for TV, radio and instrument use. 75ohm.

Line plug	COP1	35c	32c
Chassis socket	COS2	50c	40c
Cable/Panel joiner	COS5	50c	40c



**F.M. ANTENNA** The latest VHF/FM aerial Suitable for both vertical or horizontally polarised signals. A must for good FM reception. Mounts indoors or outdoors. Mast extra. \$13.50 (P&P \$1.50)


## NEW



## COPAL DIGITAL CLOCKS

The Copal range is a brand new way to tell the time. Copal celebrated their 25th Anniversary last year and have a world wide reputation for precision engineering. They introduced digital clocks in 1965 and manufacture 200,000 clocks a week!! We've chosen the RP 160 — the lowest price alarm clock in their range with a 12 hour digital presentation and 24 hour alarm dial. Colours are ivory, orange and gold and price is well under normal retail at \$14.50

**Model 703** is for Amateurs and features a 24 hour display and a repeater type alarm. Available in orange, avocado or white. This clock features ultra-modern styling and is highly recommended at only \$21.00 (both p&p \$2.00)



## NICAD BATTERY CHARGER

This neat little unit is made by Sanyo and charges all three 1.2V NiCad cells — AA, C & D. It is used in conjunction with a 6V battery eliminator (included in the price) which enables many pieces of battery equipment to be mains operated as well!! Charges up to 4 cells at a time. Charge rate is 30mA or 73mA @ 2.4V (2 cells of any type at a time). Unit has charge indicator and see-thru lid. Measures 58x100x195mm. We've yet to see a simpler, better unit for \$24.95 (p&p \$1.00)



## FANTASTIC LOW PRICE RHYTHM UNITS

Ideal for groups etc., wanting to add that extra rhythm dimension. Simply plug into high impedance input of your amplifier.


## RFS CONCERT RHYTHM BOX

Provides slow rock, latin beat, rock'n'roll, foxtrots and waltz, at push of button. Produces sound of Drum, Conga, clavs, maracas, cymbal and snare drum. Tempo control continuously adjustable — volume control and start switch. 15 transistor 27 diode circuit. This sort of unit could cost you \$90, but our direct import price is only \$57.00 (P&P Road Freight \$3.00).



## RH12 NORTON RHYTHM BOX

Must be the ultimate, giving a choice of 12 rhythms — March, Foxtrot, Rock, R & R, Ballad, Shuffle, Bossa Nova 1 & 2, Latin, Mambo, Waltz, Jazz Waltz. "Instruments" include bass drum, high range, snare drum, clavs, high hat. Has tempo and volume controls and start switch. Pilot light flickers in time with beat. Circuit has 22 transistors and 50 diodes. You must hear one to realize potential and incredible value. Beautiful finish. Why pay up to \$140 for the sound the RH12 gives you for only \$99.75 (p&p road freight \$5.00).



**LATE NIGHT OPENING!**

We are now open on Thursday evenings until 8 p.m. at our GORE HILL Centre (ONLY UNTIL CHRISTMAS)

See you soon!!



# DICK SMITH




# PRODUCTS

## LATEST BOOKS

### MINIATURE TAPE COUNTER NOW AVAILABLE

- 3 digit (0-999)
- large pulley drive, - one rotation one digit
- metal & nylon gears throughout
- mounts easily
- clear blade numbers on white background

GET ONE NOW. Ideal for coil winding machine & tape run counters etc. Measures 3x2x2 cm approx. ONLY \$2.50 each. (p&p 50c)




### SOLID STATE 10Watt AUTOMOBILE P.A. AMP

- \* All solid state - no warm-up waiting
- \* Operates from 12V pos or neg DC supply
- \* 10Watts (rms) output 15W maximum
- \* Complete with 4foot power and 15foot speaker cords.

We've had so many requests for a compact, reliable little P.A. amplifier. The CP-2 is just what you've been asking for. It measures only 4in x 3 1/2in x 5 1/2in deep. Output is a full 10W rms into 4/8ohms. Current consumption is 2A at rated output.

Frequency response (depending on input source) is from 200 to 10,000Hz. Two inputs: Mic at 600ohm and Auxiliary at 20k. Five transistor circuit with diode protected power line. Auxiliary socket is ideal for connecting to gram or transistor radio. By adjusting level of Aux input and mic volume control mixing can be achieved. Mic circuit has own tone control.

Supplied complete with cables and mounting brackets.  
**\$36.00**  
(P&P \$2.00)  
8" x 5", 8ohm horn speaker to suit PH58 \$22.50



### CDM1541 NOISE CANCELLING MICROPHONE

Ideal for Amateur and P.A. use, the CDM1541 features twin inserts which are out of phase to ensure good noise cancelling. Fitted with high quality PTT switch and coiled lead. Frequency response is from 300 to 5kHz, 250 to 6000Hz. You could pay up to \$30.00 for a unit like this. Excellent value at only \$8.90



3 WAY CAR CONVERTER IN STOCK AGAIN  
Fits any cigarette lighter and gives 6, 7.5 or 9V at up to 300mA. Supplied with polarity reversing extension cable and 4-way plug-socket adaptor which fits almost everything! Converter alone is usually \$5.50. Get converter and adaptor lead for only \$4.90. (p&p 75c).

**5" INDOOR/OUTDOOR SIREN HORN**  
Ideal for any location giving wide dispersion and medium power scream. Simply connect up to a 12V dc supply (via a switch) and get a really good sound.  
High impact, plastic housing measures 5 1/2" by 3 1/2" deep. Supplied complete with mounting bracket. All hardware is non-corrosive or rust-proof.  
Use one as a car siren, domestic alarm etc etc. Great value at only \$22.50 (P&P \$1.00)

### SUPER-SENSITIVE METAL DETECTOR

Just tell a builder or handyman about this fantastic gadget - locates any metal object - wires, pipes, reinforcing steel, even nails, inside walls and plaster etc.

- \* Light comes on in presence of metals
- \* Penetration/sensitivity control locates metal 6" away
- \* Super-sensitive electronic circuit pinpoints even small nails
- \* Easy to operate from 9V transistor battery

Range depends on size of metal object. Ideal for electricians who once had to pay \$30-\$40 for such a unit. And only (9V battery 75c extra)  
**\$9.75**  
(P&P \$1.00)



**TRANSISTOR EQUIVALENTS**, 9th edition, entirely revised and extended, 312 pages, \$4.90 p&p 50c. This reference book enables the user to find substitutes for given transistors. To this end approx. 9,500 transistor types of European, American and Japanese make have been included together with equivalent substitutes.  
As it is very rare that one can speak of real substitutes or "equivalents" for given transistors it is recommended to check the detailed features of the chosen substitute by consulting its full specifications in the "SEMICONDUCTOR HANDBOOK, Part 1, Transistors."

**DIODES EQUIVALENTS**, 1st edition, 144 pages \$3.75 p&p 50c. No less than 9024 equivalent types for close to 6100 given diodes of European, American and of Japanese origin have been included in these tables. Triacs, diacs, LEDs, thyristors, light-sensitive and luminous semiconductors, with the exception of phototransistors.

**THE WORLD'S RADIO BROADCASTING STATIONS**, 1st edition, 200 pages \$6.90 p&p 50c. This book will serve as an up-to-the-minute guide for those who are interested in DX-ing. Of all the world's broadcasters on SW, MW and LW - and of the European FM/TV stations also - full details have been compiled in an efficient arrangement. No detail has been left out! Additional all-over information for beginners in English, French, Spanish, German and Dutch will contribute to a wider comprehension of the art of DX-ing. A real Golden Guide for listening in to the World!

**SEMICONDUCTOR HANDBOOK, PART 1, TRANSISTORS**, 1st edition, 164 pages \$6.90 p&p 75c. This manual includes over 106,000 details of 6,750 current transistor types of European, American and Japanese manufacture. Of each transistor type the mechanical and electrical features have been given including diagrams of transistor cases.  
For easy reference the details have been arranged in alphabetic-numerical classification. This reference work offers a comprehensive source of indispensable information about current transistor types.

**TTL DIGITAL INTEGRATED CIRCUITS 1**, 1st edition (series 7400-74132), 172 pages \$7.50 p&p 50c. NEW! Recording complete data and essentials of Digital Integrated Circuits... series 7400 - covering 13 principal manufacturers in USA and Europe, this directory provides an all-in-one survey of details including equivalents.  
Filed in numerical order and indexed for easy reference this vast directory has been planned as an efficient and practical working tool for both professionals and students in electronics. The editor has, in compiling this work, drawn on his practical experience in this particular and specialist field.

**ELECTRONIC TUBE HANDBOOK**, 16th edition, 440 pages, \$6.90 p&p 75c. This book covers the principal data of a large number of European and American types of receiver and amplifier tubes as well as of cathode ray tubes for television sets and oscilloscopes.  
The data have been arranged in such a way that all relevant characteristics and electrode connections of a given type can be found easily.

**PIN-POINT TV TROUBLES - IN 10 MINUTES**, 342 pages, \$9.65 (p&p \$2.00). The guidance in this handbook enables you to find rapidly the location of most breakdowns and then go on to pinpoint a faulty valve or component. A popular seller.

**SEMICON INTERNATIONAL TRANSISTOR DATA MANUAL**, 400p, \$28.00 (see E.A. April 75) Jim Rowe called it "a most thorough reference... worthy of a place in any lab or service shop". Yes, it is expensive, but then it lists some 24,000 devices. Check the contents:

- \* Introductory definitions, codes and symbols.
- \* Manufacturers' names and addresses.
- \* Alpha-numeric listing of transistors and FET's.
- \* At least a dozen spec's for each device.
- \* Quick substitution guide.
- \* CV (M.I.L. spec) guide substitutes.
- \* Termination drawings etc etc.

PLUS... You mail them a card and they GUARANTEE to send you a year's worth of update information as it becomes available. So it isn't a book, it's a service too! Similar publications cost over \$60.00. Semicon is yours for \$28.00

## STUDENT EDITIONS

**ELECTRICAL AND ELECTRONIC DRAWING**, James F. Lowe - 145 pages, \$5.00 (p&p \$1.00). Written by an Australian for Australia, this book is an introduction to drawing and provides an understanding of mechanical and technical drawing. Coming with a set of questions and exercises, this text fulfils the needs of Electrical and Electronic Trade and Post Trades Students doing First Year Drawing.

**EXPERIMENTS IN ELECTRONICS**, James F. Lowe - 111 pages, \$3.50 (p&p \$1.00). A practical laboratory manual suitable for either advanced or basic courses. Experiments are graded into three levels - basic, standard and advanced and are designed to use equipment in Australian Technical Colleges.


**ELECTRIC AND MAGNETIC CIRCUITS**, A. Mychael - 256 pages, \$6.95 (p&p \$1.20). Suitable for Certificate and Technician students in electronic and electrical engineering, the text gives a grounding in the techniques of solving magnetic and electronic circuit problems.

**SERVICING THE SOLID STATE CHASSIS**, H. Davidson, 256 pages, \$5.35 (p&p \$1.50). A practical approach to the techniques of solid state troubleshooting which avoids the theory and maths and gets down to plain fault-finding.

**BASIC ELECTRONICS**, Bernard Grob - 800 pages, \$13.95 (p&p \$2.00). This International student edition presents the basics in electrical principles, valves and transistors with a practical approach. Each chapter ends with a summary, review questions and problems.

**101 TV TROUBLES SYMPTOM TO REPAIR**, A. Mangolis, 224 pages, \$5.85 (p&p \$1.50). An all-inclusive guide to the cause and cure of 101 TV troubles - colour and B&W, all mapped out in plain language. Each chapter lists virtually every possible cause of a specific malfunction.

**INTRODUCING ELECTRONICS**, E. R. Jones - 45 pages, \$2.00 (p&p \$2.00). Essentially a practical approach, this book, published in Australia, covers the basics of electronics and is ideal reading for the electronic beginner.



**LT701 MICROPHONE LINE TRANSFORMER**  
Input is high impedance 100-2500. Output is high impedance 50k. Fitted with manual jack type plug and socket (looks like a bug jack plug!) so very easy to install. Fully shielded metal construction.  
\$5.90 (p&p 75c)

## LATEST PRINTED CIRCUIT BOARDS

ET1701	Masterhead Amp	1.25
ET1429	LM380	1.25
ET1702	Radar Alarm	1.50
ET1528	Intruder Alarm	1.20
ET1313	Car Alarm	1.20
ET1527	Dimmer	1.20
ET1116	Impedance Meter	1.45
ET1314	Auto Amp	1.75
ET1312	C.D.I.	1.00
ET1430	Line Amp	1.00
ET1426	Rumble Filter	1.20
ET1428	Colour Organ	3.60
ET1533A	Digital Display	1.45
ET1533B	Digital Display	3.15
ET1440	Amplifier	1.00
ET1117A	Digital Voltmeter	1.00
ET1117B	Digital Voltmeter	1.45
ET1704	Crosshatch Gen.	85
ET UTILBOARD		1.25
75W3	Wiper Control	1.25
75M6	Optimum	3.25
74 C3	Tape Deck Amp	1.35
75 SD4	FM Stereo Decoder	1.50
75 A01	Function Generator	1.20
75 C07	C.D.I.	1.45
ET1433A	Active Crossover	1.45
ET1433B	"	1.45
ET1120	Logic Probe	85
ET1121	Logic Puler	85
ET1118	Frequency Counter	1.20

**Post and Packing 75cents for 1 to 3 boards**  
*So buy more & save!*

## NEW KITS

Check these latest additions to our range of popular Kits:

Kit No 78	FM Stereo Decoder	\$10.75
E.A. April 75		
79	ET Radar Intruder Alarm	\$54.00
E.T. May 75		
80	E.A. July 75 C.D.I.	\$22.50
81	Crosshatch/Dot Generator	\$21.50
E.T. Aug 75		
82	E.A. Transistorised Ignition, Neg. earth only but easily converted to pos. earth	\$17.50
E.A. Aug 75		
DC8	Kit version of fabulous Profords Digital Alarm Clock	\$34.50
QC8	Quartz Crystal Battery Adaptor for all Fluorescent Readout Clocks	\$12.50
E.A. Sept 75		

## NEW PRICES

Kit No 11	PM143	NOW	\$69.90
71	ET1422	NOW	\$118.00

A popular old Kit revived:

1 E.A. Digital Logic Trainer MKII, \$82.00  
E.A. Mar 73. Revised by demand. Ideal for Schools and other Educational Institutions

## WIDE RANGE OF NEW CMOS AT PRICES THAT GIVE OUR USUAL FANTASTIC VALUE!

TYPE	DESCRIPTION	PRICE 1-9	PRICE 10-up	PRICE 100 mix
SCL4000AE	Dual 3 Input NOR Gate Plus Inverter	45	40	35
SCL4001AE	Quad 3 Input NOR Gate	45	40	35
SCL4002AE	Dual 4 Input NOR Gate	45	40	35
SCL4006AE	18 Stage Shift Register Static	2.75	2.65	2.60
SCL4007AE	Dual Complementary Pair Plus Inverter	45	40	40
SCL4009AE	Hex Buffer/Converter, Inverting	1.25	1.20	1.17
SCL4011AE	Quad 2 Input NAND Gate	45	40	35
SCL4012AE	Dual 4 Input NAND Gate	45	40	35
SCL4013AE	Dual D Type Flip Flop with Reset	1.25	1.15	1.05
SCL4014AE	8 Stage Static Shift Register	2.75	2.65	2.60
SCL4016AE	Quad Bi-Lateral Switch	1.05	1.00	95
SCL4017AE	Decade Counter/Divider	2.65	2.55	2.50
SCL4018AE	Presetable Divide By "N" Counter	2.80	2.70	2.65
SCL4021AE	8 Stage Static Shift Register	2.60	2.55	2.50
SCL4022AE	Divide by 8 Counter with 8 Decoder Outputs	2.25	2.20	2.15
SCL4023AE	Triple 3 Input NAND Gate	45	40	35
SCL4025AE	Triple 3 Input NOR Gate	45	40	35
SCL4027AE	Dual J-K Type Flip Flop with Reset	1.25	1.20	1.15
SCL4028AE	BDC to Decimal Decoder	2.10	2.00	1.95
SCL4029AE	Presetable Up/Down 4 Stage Counter	2.85	2.75	2.70
SCL4030AE	Quad Exclusive or Gate	1.00	95	90
SCL4049AE	Hex Buffer/Converter, Inverting	1.00	95	90
SCL4050AE	Hex Buffer/Converter, non inverting	1.00	95	90
SCL4071AE	Quad 2 Input or Gate	45	40	35
SCL4081AE	Quad 2 Input and Gate	45	40	35
SCL4416AE	Double Pole Double Throw Switch	1.00	95	90
SCL4426AE	Decade Counter/7 Segment Decoder/Driver	3.40	3.30	3.25
SCL4449AE	Economy Hex Inverter	45	40	35
SCL4511AE	BDC to 7 Segment Latch/Decoder/Driver	2.65	2.55	2.50
SCL4518AE	Dual BCD Up Counter	2.50	2.40	2.35
SCL4520AE	Dual 4 Stage Binary Up Counter	2.80	2.70	2.65
SCL4528AE	Dual Retriggerable Monostable Multivibrator	1.75	1.70	1.65
SCL5411AE	Oscillator 16 Stage Flip Flop with Buffer	3.75	3.65	3.60
MC14553	Dual BCD to 7 Segment Decoder and Driver	10.50	10.30	10.20
CA3130	Fet Input Operational Amplifier	1.85	1.80	1.75
MM5314	DTL Clock I.C.	5.90	5.80	\$4.20

*all these CMOS are packed by us in a special conducting foam to prevent damage by electrostatic charges*

# Mini-Catalogue




# SAVE on Hi-Fi

## LATEST NEWS: Extra duty on head- phones, buy now & SAVE!

**DEITRON DSH - STEREO HEADPHONES**  
De-luxe headphones featuring adjustable head band plus soft padding for the ears and for the top of the head.  
Individual volume controls + stereo mono switch Impedance 8ohm.  
Curl-cord extends to a full 9' with standard stereo jack fitted.

Per \$175

ONLY  
\$10'95



### MODEL SM220 STEREO HEADPHONES

An 8ohm headphone at a realistic price. Cushioned pads on these phones let you drift into another world. Expanding headband suits egotists and diet watchers. Enter the world of stereo with the SM220 Complete with lead and stereo jack.  
Dick's price (before the increase in duty) is an astounding \$6.95

\$6.95

per \$175



### COLOUR YOUR WORLD WITH EXPO

Why look dull when wearing your headphones?


The Expo CIS 50 Headphones come in two shades - a beautiful decorator Red or scintillating Yellow. Units are 8 ohms impedance fully equipped with 6 feet of 'black' lead with a standard stereo jack for connection to your amp.

\$12.99

(p&p \$1.75)



SAVE  
\$2.95



ONLY  
\$7'50  
each

### CUBE SPEAKER SENSATION I

Now everyone can have Quadraphonic Sound with these fantastic little extension speakers.

Check these features:

- \* Scuff resistant vinyl exterior
- \* Modern colours
- \* Rugged 4" 8ohm speaker 50-20,000Hz 4watts
- \* Screw rear terminals
- \* Black fascia
- \* Measures a compact 128(w)x128(h) x123(d)mm

Get these handy extension speakers now for only \$7.50 each. +75¢ p&p

Ideal as Transistor Radio extension speaker.

## HARMON KARDON synergy one



Dick Smith has great pleasure in stocking Harmon Kardon. Cast your eyes on the system below, read the specs, then get over to Dick Smith's and see it in the 'flesh'.

### A Complete System - SYNERGY ONE (Definition: Combined Action)

The Model 330B Receiver is of the usual high quality expected from Harmon Kardon.

Brief Specs: 20/20 watts continuous both channels

driven into 8 ohms.

Total Harmonic Distortion: Less than 0.5%

Intermodulated Distortion: < .5% from 1 watt to full power.

Hum and Noise: >75dB below rated O/P.

FM Sensitivity: 2.5µV (IHF)

The front of this unit shows a beautiful AM/FM Scale indicated in green. The features read like film credits: Tuning meter - speaker system 182 - Stereo Mo-o switch - Tape monitor - Contour switch - the normal balance, volume, tuning, function and last but not least separate bass and treble controls for both channels.

The rear of the unit has full facilities including separate main and pre-amp for both channels - fuse protection for both channels - speakers from 4 ohms thru' to 16 ohms. And a host of other features.

### The Turntable of Synergy One is the renowned CEC BD2000

This unit is a belt drive unit driven by a 4-pole synchronous motor. Place your record on the cast aluminium platter and listen to your favourite music with a S/N ratio of more than 42 dB and wow figures of less than 0.1 %.

The unit comes complete with the MG15 tone arm incorporating a universal plug in headshell. No need to buy a cartridge - that's there too! A magnetic cartridge with diamond stylus. We could tell you more - come and see us and the CEC BD2000

Finally, the end product... the well respected HK20 Bookshelf Speakers.

These specifications speak for themselves: -

8" long throw woc 'sr

2 1/2" ultra wide dispersion tweeter

Response: 36 Hz to 22 KHz.

Capacity: 40 watts continuous

Design: Acoustic Suspension.

HEAR THEM TO BELIEVE THEM.

G/Tee's 2 full years on the 330B

1 full year on the turntable

1 year on speakers + 4 further years on parts.

Before telling you the price, Dick would like to quote the Harmon Kardon credo - Faithfulness in music

Faithfulness in music reproduction is note merely a compilation of impressive specifications. The final judgement comes from listener appreciation and the ability to enjoy many hours of music without strain or fatigue. COME AND JUDGE FOR YOURSELF.

### Complete System

\$499


(P & P FREIGHT ON)

A Saving  
of \$119!

### HEAD DEMAGNETIZER

Ever wondered why your cassette or tape recorder sounds 'hissy' even after you have attacked the heads with a cotton wool bud and cleaned them?  
The answer is magnetism - most people do not realize that the so called 'magnetic head' must not have any residual magnetism on it. If it does it can adversely affect both recordings and playback.  
DICK has the answer to your 'hissy' problems in the form of a very convenient 'head de-magnetiser'. Plug this unit into the AC outlet and holding the probe about a foot away from the heads gradually bring the probe down towards the heads.  
Taking the probe close to the heads, swing across them and away until you are again a foot away - this is all done with a semi-circular action.  
In doing this the probe draws any magnetism from the heads and leaves them ready for recording or playback.  
DICK recommends you do this every five hours of recording or playback.

The cost of preserving your tapes is a ridiculously low \$6.95 (p&p \$1.00)



### PIANOLA SR2201 - The Car Radio Bargain

Dick has been selling this little beaut for months and as we have had none back for repair, he has decided to give a real swinging price on this unit.

The radio is a push-button (5 buttons) selector or manual, the front fascia plate can be altered to give black, walnut or silver satin finish. There are controls for manual selection, volume & tone and if your car is 12V positive or negative, no worries, a simple switch controls from +ve to -ve.

Pianola has everything in the one package - all hardware, superannated bobs & bobs, rear support bar, 5" speaker, support plate for the speaker and even a spare fuse. Dick makes it all complete by giving an aerial in the package deal.

This unit will fit most cars and you have no worries with a 12 month guarantee included in the price.

So what's all this cost?

DICK SAYS \$49.95 ... this saves at least \$30

on comparable units (p&p \$2.50)

NB: The PIANOLA SR1206 is also available at \$69.95 + p&p This unit is identical to the SR2201 except it can be used on 12V + or - and 6V + or - cars. THIS IS IT FOR BEETLE OWNERS!



One of England's most popular turntables is now available at Dick Smith Electronics ...

### THE BSR 810 Automatic Transcription Turntable.

This unit has many features that will enable you to enjoy your music to the fullest extent.

The unit has a 7 lb (approx) 12" dynamically balanced

diecast turntable - this takes either a single play

spindle or an auto spindle (both supplied). The tone

arm is of the square section type with counter-

balance weight and tracking weight setting in 0.25

grams units from 0 grams to 4 grams. The arm has a

slide in mount for the cartridge. The BSR 810 has

an anti-skating device in the form of a knob that can

be set for either spherical or elliptical stylus. There is

also an adjustment for set down of the stylus on the

record, a tone arm height adjustment (essential for

different types of cartridge), a viscous damped

device and an arm lock for when the unit is not being

used. Five push buttons control the following

functions: Manual operation, stop, 7-10 and 12

these determine set down of arm on auto operation

(they relate to record size). This unit will play

stacked records, one record at a time and will auto

repeat single records if required. The unit has an

ADC Magnetic cartridge fitted and there is a brush

situating so that the stylus is automatically cleaned

before playing. The speed selector is for 45 rpm and

33 rpm and has a variable pitch control used in con-

junction with the supplied stroboscope disc.

This unit has other features but we lack the space ... so

what's all this cost?

DICK'S PRICE \$165 complete with base & cover

(SAVE \$26.00) (p&p freight on)


### DUAL PHONE LEAD

It's late at night - you want to use your Hi-Fi and the neighbours suffer from noise phobia!

THE ANSWER IS HEADPHONES - You can listen without disturbing anyone and Dick has the answer for those people who like to share music.

Dick has a dual headphone lead. Plug the standard stereo jack into your audio and one metre later there are two standard stereo jack sockets. Plug in two pairs of headphones and listen to your 'hearts' content!

The lead that can stop divorce from Dick at \$3.00 (p&p 75¢)



## AT LAST! An AM/FM Radio at a LOW PRICE


Finished in black plastic with vinyl sides - a carrying handle complements the military design. A large indicator dial gives a semi-circular readout showing clearly FM in MHz and the AM band in KHz. The volume control has ten position indicator for precise setting of your favourite volume level. Band selection via a clearly indicated control under the volume control.

Telescopic aerial for FM reception and an output jack for tape recording finishes the physical description. The SG1264A contains 9 transistors and 6 diodes and best of all sounds great. (4 penlite batteries included).

What cost a unit like this?  
\$35 ... NO! \$25 ... NO!

\$19.95

(p&p \$1.00)



### DON'T SUFFER TENSIONS

Dick has the answer with the

'Cassette Tension Winders'


Use them to take up

slack or for easy

editing and repairs.

DICK'S PRICE 75¢

(per pair)




## METROSOUND Audio Care Products

### METROCORE HI FI KIT 4:

Comprising balanced arm bug + ionizer + liquid. SAVE \$3.95 on this item.

DICK'S PRICE \$9.95 p&p \$1.00




### METROCORE DISCMASTER:

Dual purpose Wet & Dry cleaning arms.

SAVE \$2.25


DICK'S PRICE \$9.00 p&p \$1.00



### METROSOUND JUNIOR GROOVEMASTER

Clean your records the easy way.

DICK'S PRICE \$3.95 p&p \$1.00



### METROSOUND DOLBY TEST CASSETTE

SAVE \$1.35

DICK'S PRICE \$6.75 p&p .50¢



### METROSOUND IONISER MKII

Improved model of humid, soft velvet

containing a special anti static agent.

DICK'S PRICE \$2.49 p&p .50¢



# DICK SMITH



### CASSETTE SPECIALS!

We continue our superb Prices on cassettes

	Singles	5	10	20
BASF				
C60LHSM	2.50	2.00	1.85	1.55
C90LHSM	3.00	2.50	2.20	2.00
C90SMC/02	4.25	3.75	3.50	3.25

And now HATCHI Cassettes

	Singles	5	10	20
C60LN	1.69	1.49	1.39	1.29
C90LN	2.25	1.99	1.84	1.69
C60UD	2.60	2.45	2.29	1.99
C90UD	2.99	2.69	2.49	2.29

For SONY enthusiasts, we have a few Sony HF Tapes left:

	Singles	5	10	20
C60	2.75	2.50	2.30	
C90	3.70	3.40	3.10	

### SUPER SPECIAL

CANNOT BE REPEATED OFFER ON CrO<sub>2</sub> C60

SPECIAL MECHANICS LIBRARY PACKS

10 or more \$1.50

SAVE AT LEAST \$2.40!!

p&p	1 tape	50c	10 tapes	1.00
	5 tapes	.75c	20 tapes	1.75

don't forget p&p

### NEW SCOTCH CLASSIC CASSETTES

This new cassette combines the unique qualities of CrO<sub>2</sub> with a layer of gamma ferric oxide. The tape is supplied in the 3M 'Posttrak' backing. Bias setting needed is for normal tapes, but if you have the setting this is better. Brief specs are full 10db increased headroom at 12.5kHz before saturation. Low frequency sig/noise better than 5db above ref. High frequency is better than 13db. We've put it through our tests and we're really impressed. Call in and hear some!

	1 off	5	10	20 plus
C60	\$3.60	\$3.35	\$3.00	\$2.75
C90	\$5.00	\$4.50	\$4.00	\$3.50

### GOLDRING ES70S MAGNETIC CARTRIDGE SCOOP!

save \$4

We have this cartridge in our catalogue at \$8.75, but here's your chance to buy at nearly half price! Yes we've cut the ES70S right back to only \$4.75!! Check the spec: Frequency response from 15 to 25kHz. Output is 6mV at 5cm/sec. Tracks at 1 to 2.5gm. Fitted with conical diamond stylus 0.8milligram tip mass and high compliance. So save \$4.00 on this beautiful magnetic cartridge. Now it's yours for only

**\$4.75**

### THE ORIGINAL DUST BUG!

A few years ago Cecil Watts had the brilliant idea of removing dust from records with a brush that traversed the record whilst you were playing music. This idea is called the DUST BUG. Dick has in stock the original CECIL WATTS DUST BUG. Housed in a see thru plastic container the unit comprises a rubber suction pad support unit with an adjustable height rod. This is placed in a convenient place on the turntable and into it is placed a perspex arm that has a soft roller brush for picking up the dust and a nylon brush for tracking across the record. Included in the kit is a bottle of anti-static liquid and instructions. Simple but effective - and original DICK'S PRICE \$5.99 (p&p 75c)

### KB12 The adaptable rear speaker for Cars.

A 5" x 7" watt 8 ohm speaker in a rear wedge mount speaker box. Undo four screws and use it as a flush rear deck speaker with a smart front grill. Finished in black high strength plastic. Wire included and packed as pairs.

Would you believe \$12.00 per pair (That's only \$6.00 each!) (p&p \$1.50)

## NEW SWITCHES



### ECONOMY TOGGLE SWITCHES


P5215 Single pole, single throw. Well designed switch with bakelite case, chrome on-off plate and handle. 1 1/2" high x 5/8" wide x 1" deep. 3/8" bushing, solder lugs. Handles 1 1/2A at 240V

	1-9	60c	10up	50c
P5216 As above but double pole, double throw.				
	1-9	\$1.20	10up	\$1.00

P5217 D.P.D.T. Centre 'off' 3A rating at 240V a.c. Rugged bakelite case. Red and Black On/Off plate. Screw terminals. 1 3/8" high x 1 1/2" wide x 1 3/8" deep.

P5218 D.P.D.T. with enormous 6A rating at 240V a.c. Same dimensions as P5217 above. Chrome plated metal parts and screw terminals.

	1-9	\$2.20	10up	\$2.00
--	-----	--------	------	--------



### PROFESSIONAL "MIYAMA" SWITCHES

#### ULTRA-MINIATURE TOGGLE SWITCH

Almost unbelievably small size. Ideal for miniature equipment, models etc. This switch is even smaller than the normal miniature switches. 5.2mm mounting holes. 240V rating @ 1A. DPDT contacts

MS245	1-9	\$1.00	10 up	80c
-------	-----	--------	-------	-----

#### MINIATURE TOGGLE SWITCHES

The following range of famous Miyama switches are our most popular. They are intended for most general applications. Quality is excellent, so don't be put off by the low prices - we import them direct. Rated at 240V @ 1 1/2A. 6mm mounting hole.


MS173	SPDT	1-9	\$1.10	10up	\$1.00
MS174	DPDT	1-9 <td>\$1.35 <td>10up</td> <td>\$1.25</td> </td>	\$1.35 <td>10up</td> <td>\$1.25</td>	10up	\$1.25
MS286	DPDT	1-9	\$1.50 <td>10up</td> <td>\$1.40</td>	10up	\$1.40

(centre off)

#### HEAVY DUTY MINIATURE TOGGLE SWITCH

This switch although it is still a miniature, offers high reliability and quality. It is recommended for applications requiring the highest rating and reliability. Rated at 240V @ 6Amps!

MS168	DPDT	1-9	\$1.75	10up	\$1.50
-------	------	-----	--------	------	--------



### PUSH BUTTONS All quality Miyama brand

#### MS102 MINIATURE PUSHBUTTON

Push 'ON' momentary contact. 7mm mounting hole. Rated at 240V @ 1/2A. Available in Red & Black.

	1-9	40c	10up	30c
--	-----	-----	------	-----

#### MS197 ALTERNATE ACTION PUSHBUTTON

This miniature switch is of professional quality and has a full 240V rating. DPDT contacts rated at 240V @ 1 1/2A. White button. 6mm mounting hole.

	1-9	\$1.80	10up	\$1.60
--	-----	--------	------	--------

#### MS198 Push 'ON' Push 'OFF' PUSHBUTTON

This switch has an all plastic case and button. Rated at 240V @ 3A. Red button. 12mm mounting hole.

	1-9	\$1.20	10up	\$1.00
--	-----	--------	------	--------

#### MS199 Push 'ON' Momentary contact PUSHBUTTON

Identical looking to the above switch but this one features momentary 'ON'. Rated at 240V @ 3A. 12mm mounting hole.

	1-9	\$1.15	10up	\$1.00
--	-----	--------	------	--------

#### MS078 ILLUMINATED PUSHBUTTON

This high quality illuminated switch is intended for applications where panel space is extremely limited. Supplied complete with built-in 6V globe. Rated at 240V @ 1A. Momentary contact 'push' 'ON'. Red button. Requires 18.5mm square hole.

	1-9	\$1.50	10up	\$1.30
--	-----	--------	------	--------

#### MS080 ILLUMINATED PUSHBUTTON

Identical to the above but designed to give momentary contact 'push' 'OFF' switching. Therefore has a green button with 6V globe.

	1-9	\$1.60	10up	\$1.40
--	-----	--------	------	--------


### ROTARY SWITCHES

Our new range of imported rotary switches at an extremely economical price, is ideal for all projects. Spring loaded, positive detent action. 1 1/2" diameter with 1 1/2" shaft. Plated lugs. All one section. All same price.

Poles	Positions	1-9	\$1.45	10up	\$1.20
1	12				
2	6				
3	4				
4	3				
6	2				


### SUBMINIATURE ROTARY SWITCH MRZ204

This professional quality switch is fully dust-sealed and will last a lifetime. Contacts are rated at 240V @ 1A. Switch offers 2 pole, 4 position switching. Requires 6.5mm mounting hole. Supplied complete with pointer type knob. \$3.90



### SUBMINIATURE LEVER SWITCH LT030/60

This is virtually a wafer type switch to which has been added a special lever action. Configuration is 2 pole, 4 way. Supplied complete with mounting bracket and neat black knob. Ideal input selector for amps etc. Mounting centres at 32.5mm. \$3.75



### FOOT SWITCH

Features robust crackle finish metal case with large rubber foot pad. Lead is terminated in normal jack plug. A neat unit taking up a minimum of space, yet offering a good positive action. \$

### SLIDE SWITCHES

#### Model SLS124 SUBMINIATURE DPDT

Ideal, inexpensive switch for all applications. Black plastic actuator. 18.5mm mounting centres

	1-9	30c	10up	25c
--	-----	-----	------	-----

#### MODEL SLS222 5MR

Similar to the above switch, but this one has an extremely attractive spun aluminium actuator with red insert. Ideal for pushing up your amp front panels!

DPDT	1-9	45c	10up	40c
------	-----	-----	------	-----

#### MODEL SLS232 7R

A subminiature 3 position, 2 pole slide switch with a spun aluminium actuator, red insert as the above switch. Mounting holes at 18.5mm centres.


	1-9	60c	10up	50c
--	-----	-----	------	-----

Mounting screws for above switches 3c each.

#### MODEL SLM222 11R

This miniature DPDT slide switch has a beautiful spun aluminium actuator with black insert in place of the usual black plastic actuator. Ideal for panel mounting where looks are important. Mounting holes at 28.5mm centres.

	1-9	60c	10up	50c
--	-----	-----	------	-----



### ULTRASONIC WIRELESS SWITCH

Yes, here's a ready made unit for garage door opening and numerous other on-off switching applications like lights, TV etc. Operates at a distance of up to 40ft at a frequency of 38 kHz. Operating time constant is 1.2 seconds. Switching relay is rated at 600W (240V at 2.5A).

NOTE: The receiver operates as an alternate on-off device. Each signal from the transmitter changes the state of the receiver relay. However a switch on the receiver allows direct operation of the relay. Transmitter USO-12Tx operates on a 9V transistor battery. Available separately at \$7.50 each. Receiver USR-12Rx operates from 240V ac. Complete system USO-12Tx plus USR-12 Rx is yours for only \$29.75 P & P \$1.50.



Technics Matsushita Electric

NATIONAL RS-676 US

A front loading Cassette deck of superb specifications

Track System : 4 track 2 channel stereo  
Speed : 4.8 cm/s  
Wow & flutter : 0.063% (WRMS)  
Frequency Response: Normal tape (MPX Filter out)  
20 - 16,000 Hz  
CR02 Tape (MPX Filter out)  
20 - 18,000 Hz  
S/N Ratio: Dolby out - 52dB  
Dolby in - 62dB @ 10 KHz  
Harmonic Distortion: 2.0% (OVU @ 1,000 Hz)  
Inputs: Mic, Line, Tuner  
Output: Line, Headphones  
Motor: 2 motor system  
1-Electronic speed control motor for capstan drive  
1-DC motor for reel table drive  
Heads: HPF for rec/playback.  
1 Ferrite head for erase.  
Dimensions: 410mm(W) x 140mm(H) x 360mm(D)  
Weight: 10.5 kg.

This unit has so many features that we can only list a few.  
Operation is controlled by solenoid switches, it has memory rewind, O/P level, record level controls, selector for input source, CR02 - normal switching and of course Dolby switching.  
With Dolby on this unit you have the opportunity of recording FM Dolby Broadcasts (experiments by 2FMBS during September in Dolby Broadcasts may become part of Australia's FM future). This enables you by taking the output from a tuner (with record out facilities) to calibrate and record the FM Dolby Broadcast direct.

Note: The purpose of Dolby Broadcasts is to remove objectionable hiss from low modulation passages, particularly classical music.

DICK'S PRICE **\$525**

(p&p freight on)



# LATEST Amateur Gear

## BOOKS

**WIRE ANTENNAS FOR RADIO AMATEURS.**  
192 pages, 97 illustrations. \$8.60 (p&p \$1.00)  
How to build efficient horizontal, vertical, multitap, trap and beam antennas 2-160 meters. "Invisible" antennas for difficult QTH's, 2 & 6M quickie beams, tuners, baluns, etc.

**ALL ABOUT CUBICAL QUAD ANTENNAS**  
112 pages, 200 illustrations. \$6.90 (p&p \$1.00)  
The world-famous "Classic" on quads! Gives new dimensions, revised gain data; Quad V Yagi; Mini Quad and Monster Quad construction; correct dimensions 6-80M.

**BEAM ANTENNA HANDBOOK**  
200 pages, 122 illustrations. \$8.60 (p&p \$1.00)  
Correct beam dimensions 6-40M. Are 40M beams worth the effort? Construction triband and compact beams; the truth about height/matching systems, baluns, and test instruments.

**VHF HANDBOOK FOR RADIO AMATEURS.**  
336 pages, 298 illustrations. \$9.95 (p&p \$2.00)  
Unique new handbook covers major VHF subjects in clear language: FM equipment, antennas, repeaters, VHF ants., DX propagation; satellites; EME; construction, etc.

## BARLOW WADLEY

**BARLOW-WADLEY XCR30 MARK II RECEIVER**  
(see E.A. May 73, A.R. Sept. 73). As keen Amateurs know, is no ordinary superhet portable. It is a cunningly disguised general coverage communications receiver with a range from 500 KHz to 30MHz. There is no band switching since one dial selects MHz and the other KHz (calibrated to 10KHz). It uses the Wadley loop as used by Rascal which involves a front end oscillator covering 45.5 to 75 MHz (see magazine for full description). The result is frequency scale accuracy of 5KHz reset to within 1KHz. Set the dial to WWV, switch on and you hear the signal! Selectivity is 6 KHz A.M. 3KHz SSB. Sensitivity is limited by antenna thermal noise. Image rejection 50dB. Modes are LSB/AM/USB clarifier on SSB. Reception is of course crystal controlled. Quote from A.R.: "It would be hard to imagine a better receiver for SW listeners". A masterpiece of electronic engineering in our opinion. \$275.00 P&P \$2.00



**Icom IC22A**  
now in stock at  
\$210  
P&P Insured anywhere in Australia for \$3.00

## JUST IN...



Set of 2 cassettes for \$12.50

## MORSE CODE BY THE WORD METHOD

We have searched the world in response to hundreds of requests for help with learning the code. This US tape has been evolved after years of practical experience. It is unusual, yet is claimed to work, by starting at a moderate speed using simple material and then building up at the same speed to more difficult material. Thus the student doesn't have to increase his speed. At the end of the two cassettes you should be ready to receive at a speed of 13wpm - and you should have reached that level of skill in much less time. Come on you novices and Z calls, here's your chance to get a full licence!



## UNIDEN TRANSCEIVER

**LATEST TRANSCEIVER SENSATION!**  
80-10 Meters, AC-DC, Separate USB/LSB/CW filters, phase lock loop oscillator for maximum stability, independent RF circuits for TX & RX, plug in module with digital frequency readout. (P & P Freight on) **\$570.00**

## KENWOOD



### KENWOOD TS520 SSB TRANSCEIVER

Month after month Kenwood is proving to be even greater value. With thousands of units now on air all over the world, the famous Kenwood quality and value speak for themselves. SSB and CW on 80 through 10 metres built in A.C. and 12V D.C. power supply, VOX, RTT, noise blanker and all other features you want... all for \$550.00 (plus freight on)



### KENWOOD TS900 DELUXE SSB TRANSCEIVER

GST wrote: "The only transceiver superior to the KWM2" USB, LSB, CW, FSK on 80 through 10 metres, with 300 watts PEP on SSB. Coming complete with power supply, speaker unit, the TS900 has been designed and built for serious enthusiasts. There are just too many features to describe. \$800.00 (plus freight on)

## YAESU

YES! The New 'E' Model!



**FT-101E THE VERY LATEST OF THE 101 SERIES**  
With speech processing and many many more features. Includes FULL 10 meter coverage. \$640 includes Mic & all cables (P & P Road Freight On)

**FT-101ES SPECIAL FOR NOVICE OPERATORS**  
The above unit is available to comply with your requirements. Unit comes complete with 6 crystal locked Transmitter Frequencies & can be modified for general use. \$640 Includes Mic & all cables (P & P Freight on)

### HAM HIGH QUALITY LOW NOISE FET RF AMP MODULES

These units are designed to be simply connected between the aerial and receiver of any 10.6 or 2 metre unit. You can even mount them right at the aerial if you require maximum performance. Input impedance 50-75 ohm, noise factor 5-6 db gain, dimensions, 70mm x 30mm x 15mm. Fully wired & tested. Circuit supplied, only 4 connectors required.

ERB-27(CB)

ERB-6

ERB-2

\$18.50 ea. p&p 75c

27-29 MHz  
50-54 MHz  
144-146 MHz



### ECONOMY GUTTER MOUNT

GM-1 chrome plated gutter mount will take virtually any aerial - complete with mounting screws. \$2.75 p&p 75c

### CXIOP 12V COAX RELAY

Don't be misled by the price. This unit has high quality gold contacts which gives an insertion loss of less than 0.2 db up to 500 mHz. Very low VSWR and 1000 watt power rating. Designed to mount directly inside the smallest transceiver. \$9.75 p&p 75c



### KATSUMI MC701

#### MICROPHONE COMPRESSOR

Yes - up to double your signal strength with very little loss in clarity with this F.E.T./IC compressor. Operates from 6 internal penicite cells and is designed with slim vertical look to mount inside equipment. Works by the principle of reducing audio peaks of voice modulation thus allowing a higher average level of audio to be used. Specs as follows: 1 X 1C (UPC) 566H low noise compressor (AMP) 1 x F.E.T., 2 x transistors, 2 x diodes. Compression level 25db max fully variable, Mic impedance 100-50K ohms, distortion 1% or less, 10 db output. Freq. response 100-7 KHz 2db (300-3kHz with audio filter on) S/N ratio - 60 db. Power 9 volts @ 15 MA max. Dimensions 50mm W x 170mm H x 110mm D. Complete with circuit and instruction book. \$39.50 p&p \$2.00 Batteries extra.

### SW-3C3 POSITION COAX SWITCH

High quality gold plated contacts give a maximum rating of 1.5 kW. with an insertion loss of only 0.03db at 50mHz. Incredibly low VSWR, over 60db isolation, operates up to 1000 mHz - a real mickey mouse unit. Also features safety "pull to turn" systems which prevents "fiddlers" blowing things up. \$22.00 p&p \$1.00




### RAK BL50A 50 ohm Balun (1 to 1 Ratio)

Enormous 4 kW maximum rating, fully weatherproof, 1.8 to 30mHz band width, VSWR 1.3 : 1 high 250kg tensile strength. VHF socket supplied. \$17.40 p&p 75c

### AMIDON TOROIDAL KILOWATT BALUN KIT

Make your own Balun with this beautiful American product. Supplied complete with massive 2" diam. Toroid, enamelled heavy gauge copper wire and explicit instructions to make 1: 1 balun, 4: 1 balun and matching to 36, 52, 72 and 600 ohms. \$12.00 p&p 75c



### HAM 6 & 2 METRE FET CRYSTAL LOCKED CONVERTERS

These beautiful little high performance low noise converters are supplied completely wired and tested with high stability crystal to give tuneable I.F. output on 28-30 mHz (use any communication receiver). Extremely stable and excellent specs; 50-75 ohm input. Noise factor 5db, gain 30db, operating voltage 9-12 VDC @ 15 MA. Dimensions 70mm x 30mm x 15mm. Completely tested and pre-aligned. However tuned if you wish to do so. Supplied complete with circuit. EXC-6 50-52mHz EXC-2 144-146mHz \$27.50 ea p&p 75c




### AIR DUX COILS

Now there's no excuse! You can easily make antenna loading units and high power liners with our high quality air dux coils. Each coil is separately boxed with an incredibly simple chart which shows at a glance the turns No/inductance/capacitance necessary for resonance at any frequency. If you would like a photocopy of these charts before buying, simply send 25c per chart and we will post them to you. All coils are 155mm long (6") and are bright tinned copper wire.

No.	Diam. (mm)	Wire Diam. (mm)	Pitch per Turn	Price
200816	20	0.8	1.6	\$3.40
401016	40	1.0	1.6	\$4.60
402042	40	2.0	4.2	\$4.95
602042	60	2.0	4.2	\$6.50

p&p 75c

## ANTENNAE

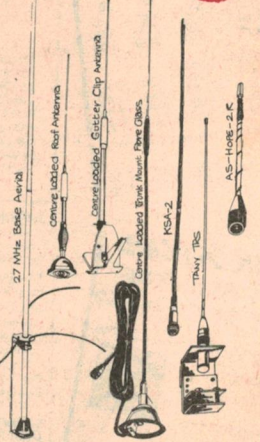

**27 MHz BASE AERIAL**  
High-gain base loaded vertical DSE-GP. This magnificent aerial with an overall height of 18 ft features a gain of 4DB. The matching stub places it at DC ground potential which substantially lowers the residual noise level and results in gains as high as 19 DB in signal to noise ratio. \$59.00 (road freight on)

### CENTRE LOADED ROOF ANTENNA

Only 18 in high but works as well as a full quarter wave of 108in. All parts chrome plated on brass or stainless steel, spring included and supplied with coax cable and connector. \$19.50 (p&p \$1.00)

### 311 CENTRE LOADED GUTTER CLIP ANTENNA

Clips on the rain gutter of any vehicle. Can be installed or removed instantly without tools! 18 in high and supplied with coax and plug. \$17.50

### G.F.A. CENTRE LOADED TRUNK MOUNT

FIBRE GLASS ANTENNA  
Ideal long range for the person who does not wish to drill holes in his vehicle, simply clamps to boot or bonnet lip. 48 in long & supplied complete with coax & plug. \$27.00

### KSA-2 Flexible 2 METRE ANTENNA

1/4 wave long - designed especially for KEN KP202 but can be used with any 2 metre unit - aerial made from 1/2" wide spring steel folds down to less than 4" high - ideal for bush use as it will not break. \$10.50 p&p 75c

### TANY TRS - 2.2 METRE ANTENNA - BARGAIN PRICED


This fantastic 144-148 mHz antenna is supplied complete with deep chromed gutter mount bracket (saves drilling holes in your car), over 4 metres of 52 ohm low flexible coax cable, PL259 plug and stainless steel whip which is easy to disconnect from the gutter mount. \$10.50 p&p \$1.00

### AS-HOPE-2R MINIATURE 2 METRE HELICAL ANTENNA

This fantastic little antenna (under 9" long) screws into any VHF socket and then performs as well as a standard 1/4 wave antenna. Ideal for mobile use where height is a problem and for walkie talkie operation. Made of heavy duty fibre glass with chrome on brass mounting plug. \$16.50 p&p 75c

### LISTENER 3

The ultimate long range, long wire dipole antenna 3-30mHz supplied complete with Balun, feed wax (45) VHF plugs, insulators, extremely large gauge aluminium wire and nylon support rope. Originally designed for professional use, but ideal for the serious short wave listener who requires the best. \$42.50 p&p \$2.00



### A-580N

Deluxe multiband transmitting & receiving antenna - Yes this is the ideal system for the amateur who is not convinced that beams are best. Covers all bands from 3.5mHz to 28mHz with a VSWR of better than 1.2. Full 2kW pep rating. The massive aluminium wire dipoles supplied ensure fantastic efficiency. \$39.75 p&p \$2.00 Note: Requires BL-50A Balun for 52 ohm operation.

## DICK SMITH

### ELECTRONICS CENTRE

Head Office & Mail Orders

P&P 50c min

Shop hours:

Mon-Fri 9-5.30 Sat 9-12.30

162 Pacific Highway Gore Hill

N.S.W 2065 tel:439 5311

telex:AA20036

cables:DIKSMIT Sydney

Also at CITY I25 York St

tel:291126

(Nr Town Hall)

and

BANKSTOWN

361 Hume Hwy

tel:709 6600

(Nr Chapel Rd)



Open till 8pm  
Gore Hill only  
on Thursdays  
till Christmas





The views expressed by correspondents are their own and are not necessarily endorsed by the editorial staff of "Electronics Australia". The Editor reserves the right to select letters on the basis of their potential interest to readers and to abbreviate their contents where this appears to be appropriate.

### Component source

There must be many of your readers—keen hobbyists like me—who are frequently very frustrated at the business of buying odd components. I have often found that the stocks held or on offer are not too comprehensive and also that the prices and delivery dates are a little daunting.

Perhaps my experience will help these unfortunates. Through my daughter in the UK, I have been put in touch with a dealer there who carries an extremely wide range of components and assemblies. The prices are much more reasonable than those applying here and the delivery is simply fantastic—I have had four orders from him in the past three months and on each occasion the goods have arrived, per air mail, within 16 days of posting the order. Even when the cost of air mail is added to the goods ordered, the prices paid are competitive in the extreme.

If any of your readers are interested, I can put them in touch with the dealer concerned—I can assure them that they will not be disappointed. Perhaps I should add that I have no direct connection with the firm concerned and I shall derive no financial benefit. But having had such good service from him, I felt that many people in Australia might like to emulate me.

Incidentally, one of the benefits derived is a system of credit vouchers. With each cash purchase, the buyer is given vouchers which, in effect, amount to 8% discount on purchases, these vouchers being redeemed on subsequent orders.

V. L. Fisher  
11 Wilcox Road  
Elizabeth, S.A. 5112

### Circuit symbols

Members of the Institute of Draftsmen, Australia have frequently favourably acknowledged the choice of symbols used in circuit drawings published in "Electronics Australia".

Currently the Standards Association of Australia is preparing a series of standard

symbols relevant to circuit drawings. Along with other relevant organisations, this Institute's representatives have played an important part in formulating definite and practical standard symbols.

Prior to the publication of these standards, symbols for new electronic components used in your magazine often proved well chosen and Draftsmen frequently adopted these as a temporary standard. As "Electronics Australia" has a wide circulation and the SAA symbols standards are now becoming available, you will no doubt adopt the standards in full.

However, may this letter be received as a mark of appreciation from Draftsmen for the policies adopted within your editorial organisation through a very difficult era in circuit drafting.

(Mrs) P. Sherid  
Federal Secretary,  
The Institute of Draftsmen, Australia.

### Transistor ignition

In the August edition of your magazine, there was an article featuring a transistor assisted ignition system. I've been looking for something of this nature for several months and I think it is an excellent idea. The problem is that on going to Elcoma components they presented me with a form stating that the BDY98 transistor used in your circuit was obsolete. This disappointed me, and I think that there may be quite a few of your readers who would also feel this way. Perhaps you may know of an alternate transistor for this purpose. Elcoma has a BDY96 which is the closest to the BDY98, but they do not recommend it for this purpose. Perhaps you could publish something in a forthcoming issue. I feel it would be much appreciated.

J. Wedlock.  
Cooroy, Qld.

COMMENT: Your letter indicates how the situation surrounding the BDY98 has been widely misunderstood and misrepresented. When we published the article the transistor was a current type, and indeed we know of two major parts suppliers who were able to obtain stocks of BDY98. Subsequently, when Philips Elcoma re-ordered from Eindhoven, Holland they were informed that production of the BDY96/9798 series had produced very low yield of the BDY98—all the yield

was going into the higher rated (and more expensive) BDY97 and BDY96. Ergo, the BDY98 is obsolete. It would seem possible that the situation might change in the future and the BDY98 might suddenly become "current" again.

The BDY97 and BDY96 may be considered to be more suitable than the BDY98 for use in our transistor-assisted ignition system by reason of their higher ratings. Unfortunately, they are very expensive. At this stage, we cannot suggest any other alternatives.

### A lot to learn?

Your expert who runs the Information Centre still has a few things to learn. I am referring to his reply to N.T. of Eaglehawk, Victoria, on page 105 of the June issue.

I have received Radio Nederland (9715kHz) on my Sharp 6-transistor MW pocket receiver, which was not modified in any way. All I had to do was to place the receiver next to the mains cord of the power pack. Obviously the 5th harmonic of the set's local oscillator was responsible for this reception. It can be explained as follows: at the dial setting of 1579kHz, the oscillator frequency is 2034kHz; 455kHz above; its 5th harmonic is 10,170kHz, 455kHz above 9715kHz.

I have a QSL card from Radio Nederland, Hilversum to verify this reception.

I have thought of designing a multiband receiver which utilises the harmonics of the local oscillator instead of switching in different oscillator coils as is normally done.


Dennis Daniel, Ph.D.  
Nelson, New Zealand.

COMMENT: In our reply to N.T. in the June issue we didn't suggest that it wasn't possible to receive signals by means of image reception or interaction with oscillator harmonics. We were making the point that not all ways of "fiddling" a set to produce such reception are equally desirable. In particular, we were frowning upon the idea of detuning the RF selectivity by deliberately shorting turns in the aerial coil. Nothing in your letter contradicts this point, which we still believe to be entirely valid. Incidentally if it is to work properly, a receiver along the lines you propose will probably still need a number of coils in the oscillator section—to select the appropriate oscillator harmonic for each range. Otherwise, the receiver will have a host of spurious responses.

### STATION LISTS

We wish to thank those readers who wrote to register their support for continued publication of the radio and TV station lists. We hope to publish an updated list shortly.



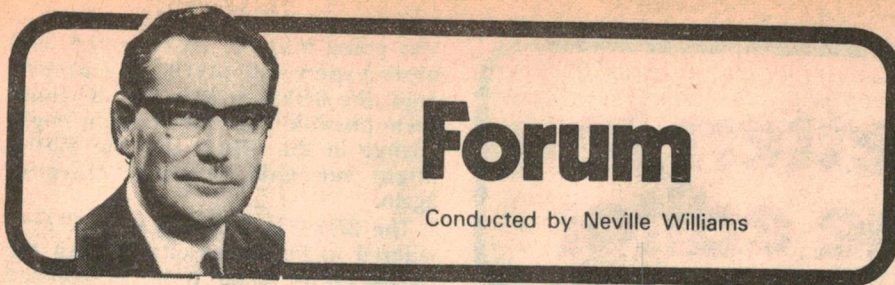

# Forum

Conducted by Neville Williams

## Sidebands: as per a Fourier analyser

In the July issue, "Forum" dealt with one of the oldest of all arguments in the world of wireless: the existence or otherwise of the sidebands in an AM transmission. The article has now turned up a verification for the sideband concept based on one of the newest equipments in the world of electronics!

Perhaps that last sentence in the introduction is a trifle exaggerated but what self-respecting journalist would pass up a convenient turn of phrase, simply on that account? Sufficient to say that the equipment concerned—a Fourier demonstrator, a computer and a pen recorder at Sydney's Macquarie University—add up to a very modern and useful teaching aid. They make it possible to synthesise a complex waveform from its Fourier components, displaying the result either on a CRO screen, or on paper.

In the July article we talked of the conceptual problem which enthusiasts have had over the years in respect to modulation sidebands, to the point where some have denied their existence altogether. Arguments put forward by the no-sideband school were examined, and hopefully disposed of in a deliberately non-mathematical way.

There the matter might have rested for

another respectable period had it not caught the eye of a Senior Lecturer at Macquarie University, School of Mathematics and Physics. We are indebted to him for the following letter:

Dear Mr. Williams,

I refer to your Forum in the issue of July, 1975, which recently came to my attention.

Convincing students of the reality of sidebands is of course of interest in universities, and one technique used could be of interest to you and your readers.

The method is to synthesise the waveform in question electronically from its Fourier components, and display the output on an oscilloscope. Instruments to do this have been manufactured, both in universities, and now commercially. The result is a very direct and appealing demonstration of the truth of the theory.

I have also written a computer program to plot such waveforms, and these are more readily put in a form suitable for printing; four such plots are enclosed. All assume a carrier frequency of 2500 Hz and a modulation frequency of 500 Hz.

Fig. 1 shows how a carrier plus a pair of in-phase sidebands can result in normal AM. The zero crossings occur where the carrier would have them (every 200 usec.) indicating the absence of FM.

Fig. 2 shows how, if the resultant of the pair of sidebands is put at right angles to the carrier, a considerable degree of FM is obtained.

Fig. 3 shows how a further pair of sidebands can remove most of the residual AM of Fig. 2.

Fig. 4 simulates what happens to Fig. 3 if the CRO timebase is expanded, and triggered off the waveform. The FM is readily evident here.


If this material is of interest, you are welcome to use the four diagrams as you wish.

Yours sincerely,  
Keith S. Imrie  
(Senior Lecturer)


We are indeed indebted to Dr Imrie for his observations and have no doubt that many will study the diagrams with interest—not because they need to be convinced but because the equipment can display, or plot in very short order what could be done graphically—given sufficient time and patience. You may recall that we referred to the graphical approach in the July article—without attempting it!

Well, Dr Imrie's computer and plotter have done the job for us and for this we are grateful.

Changing the subject, the persistent problem of hard-to-get components has

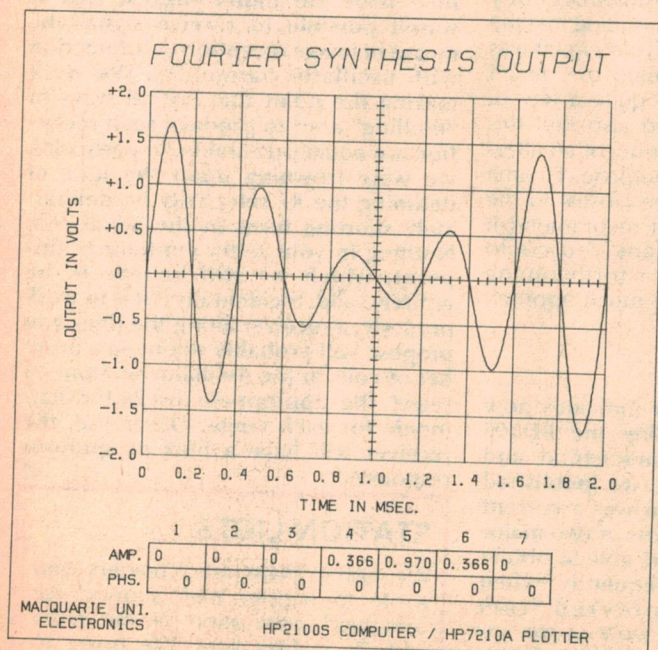

"A" Fig. 1: Normal AM

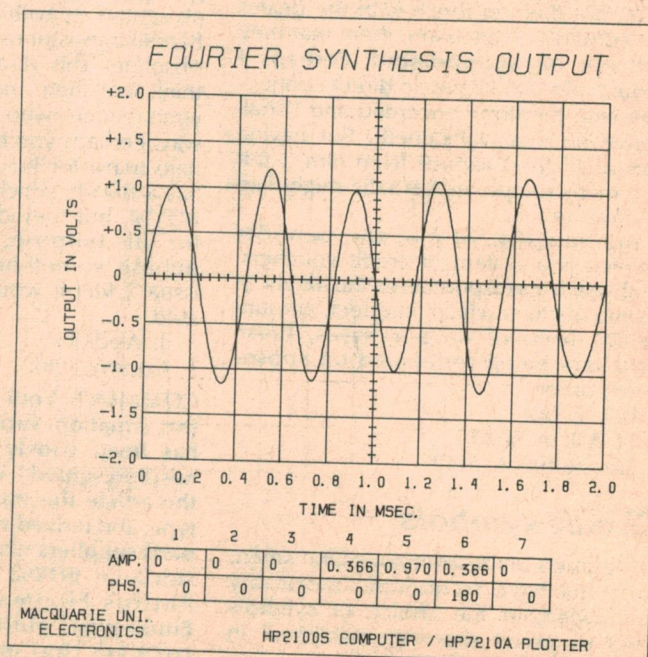

"B" Fig. 2: Poor FM



surfaced again with a letter to hand from Dick Smith, Sydney's self-styled "electronics nut". While a published letter might seem to indicate all kinds of hard feelings, it isn't really like this. Dick Smith warned us that the letter was on the way and hinted that the matter had also been raised elsewhere.

The broad problem of electronic components is not new, of course. We devoted one whole instalment of "Forum" to it in May of last year, emphasising the difficulties that suppliers—and particularly mail order suppliers—had to cope with at the relevant time. We quoted from the English journal "Everyday Electronics" as an indication that similar difficulties were being encountered, even in a compact country like Britain.

Things haven't really changed for the better in the intervening period. There are still problems of communication and supply at all levels, the main difference being that they are now more costly! The figure of \$2 which we quoted then as the bare minimum to generate a simple business letter is well and truly out of date, with rises in salaries, materials and postage.

But there's not much point in dwelling on these matters or shedding tears of lament for "the good old days". Our options are either to "drop out" or adapt and carry on, whether one's interest is electronics, or anything else one might think of.

Getting back to the present, Dick Smith's complaint is basically about the suppliers' problem when he (or they) cannot immediately meet the demand for components which are used on magazine projects. His letter reads:

The Editor, "Electronics Australia":

Dear Sir,

We have been receiving many letters from customers complaining about delay in the delivery of kits for projects which

have appeared in your magazine. They blame us for the unavailability of parts, when the fault lies with our suppliers who provide the parts for the projects.

A typical example is the Radar module which we could not obtain from Philips. We feel that it is up to the magazine to ensure a good supply of special parts before any project is published. Alternatively, a second source should be located before publication.

As you can see from the enclosed typical letter, it is my company's reputation which is getting "knocked" when we are not really to blame. I would be grateful if you would comment on this in your next issue.

Finally, if you are going to continue publishing these difficult-to-get projects, we will have to stop offering kits for them. We naturally want to give our customers service and would not like to be forced into a position where we cannot do so.

(signed) R. H. Smith  
(Managing Director)

Dick Smith Electronics Centre

Dear Sir,

Re Radar Intruder Alarm Kit 79, ET702.

On 26/6/75 I placed an order for the above item and paid an additional sum on 15/7/75 for a different kit which I have since received.

I am at a loss to see that a large establishment such as yours cannot honour your commitments in a reasonable time.

Even your delay notice of 3 weeks has exceeded your time limits. Please advise as soon as possible.

M.T. (Como, W.A.)

Curiously, the focus of the above complaint is not an E.A. project at all, but we take no refuge in that. Electronics Australia does not hold a monopoly on

either problems or solutions. They are quite ecumenical!

Speaking for ourselves, we do regularly check out the supply position on components—despite Dick Smith's implications to the contrary. We'd be crazy not to do so.


As if to emphasise the point, we currently have two completed projects "on ice" because the initial shipment of certain key components has not arrived. As soon as the essential bits show up, we'll run the articles in the fervent hope that stocks will thereafter keep pace with demand.

And herein lies a further part of the problem. One can only guess at the interest any particular project will stir up, so that suppliers and stockists alike have to "take a punt" as to how many items to order. Too many, and they're landed with dead, expensive stock; too few and they're abused for not being able to supply. Further to complicate the situation, a project may interest an equipment manufacturer and, next thing, most of the components designated for the hobby market have been bought up.


In producing the magazine, we must complete projects and designate them for publication about 6 weeks ahead of the on-sale date. At that point in time we have to make a judgement about the future supply position and hope that nothing will go off the rails while the issue is being assembled, printed and distributed.

We exercise all the care we can but, frankly, if we were to wait until all stockists had every component on their shelves, or had access to multiple supply sources, we would never describe anything but the most routine, mundane items. Then we would be roundly criticised for being stodgy, unenterprising, and behind the times!

(Continued on page 107)

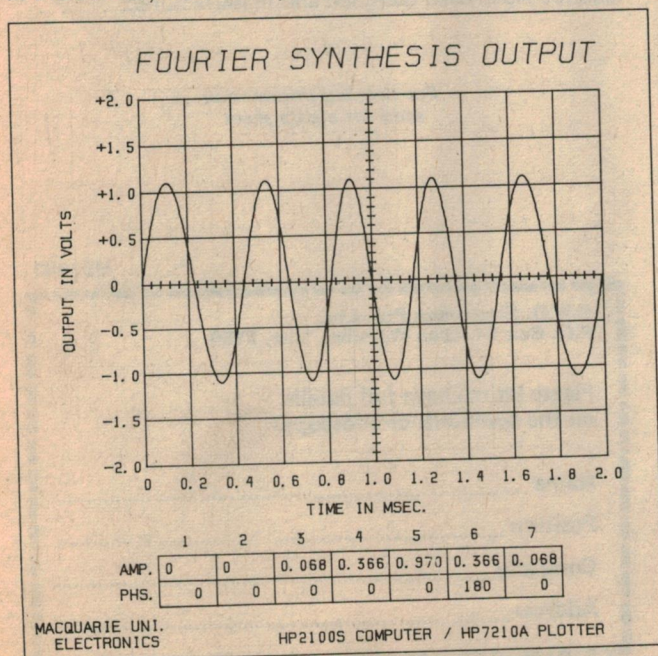


"C" Fig. 3: Good FM

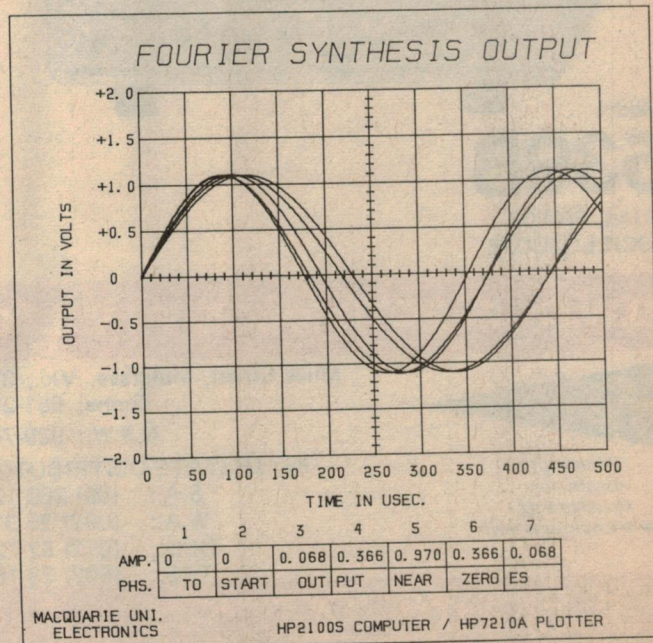

"D" Fig. 4: FM, expanded display.



When you buy the Dual Trace 539B, you get

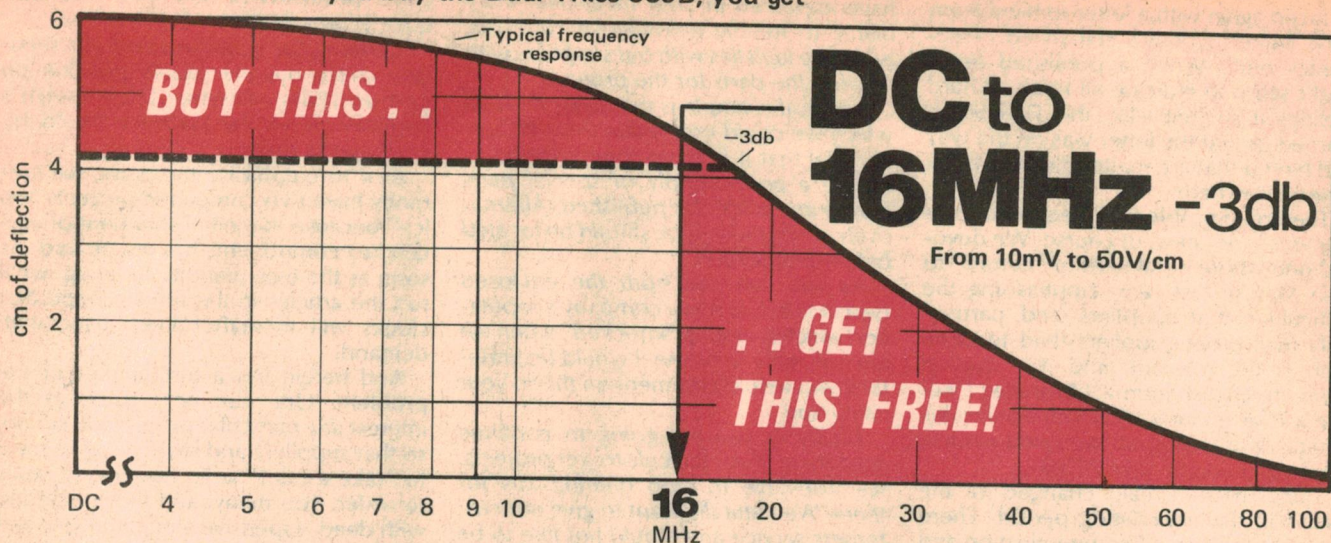


This is the tip of the performance range. Like the iceberg, there's a lot below the surface... and when you buy a bwd539B for its performance to 16MHz, you get the measuring capability to beyond 50MHz for FREE.

**These are just some of the features:**

- Sensitivity: 10mV/cm DC to 16MHz  
 $\approx$  30mV/cm at 30MHz  
 $\approx$  100mV/cm at 50MHz  
 $\approx$  500 $\mu$  V/cm 3 Hz to 30kHz cascaded
- Time Base Range: 100n Sec to 2.5 sec/cm
- Trigger Range: <5Hz to beyond 30MHz
- TV Trigger, Identical X-Y, 3.3KV EHT
- 8 x 10 cm display,

and it's Australian designed and manufactured.

For detailed information  
send for a data sheet

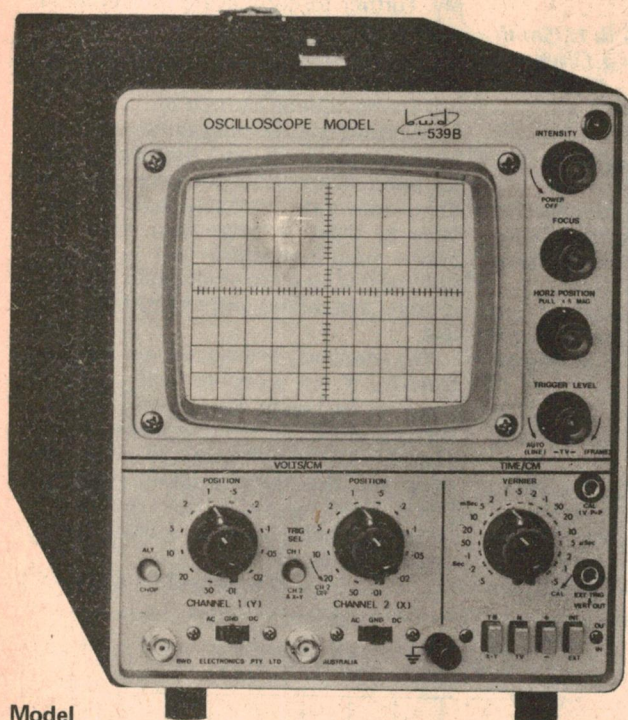

Model

**539B**

DUAL TRACE  
OSCILLOSCOPE

**B.W.D. ELECTRONICS PTY. LTD.**

Miles Street, Mulgrave, Vic., 3170  
Phone: 561-2888  
N.S.W.: 929-7452

INTERSTATE DISTRIBUTORS  
S.A.: (08) 269 1244  
W.A.: (092) 25 3144  
QLD.: (072) 52 7255  
TAS.: (002) 23 1843



Winner of  
Award for  
Outstanding  
Export Achievement

**1955/1975 20 YEARS OF AUSTRALIAN  
DESIGN INNOVATION**

MB7503

B.W.D. Electronics Pty. Ltd.,  
P.O. Box 54, Glen Waverley, Vic., 3150.

Please let me have full details  
on the bwd539B oscilloscope.


Name .....

Position .....

Company .....

Address .....





## The Serviceman

### Customers—and their funny ideas

As I may have hinted before in these columns, the most difficult part of a service job is often the customer; occasionally because they are just naturally hard to get on with, but more usually because they quite innocently say and do all the wrong things. On the other hand, their quaint ideas certainly break the monotony.

Take the "dear old ladies" (D.O.L.) for instance. Whenever I get a call from a D.O.L. I reckon it's an odds-on bet that she will come up with some previously unheard-of theory or inexplicable outlook regarding modern electronic technology. The most recent call was no exception.

The complaint concerned a Philips hybrid TV set (model 12F) and was to the effect that it would receive only radio station 2JJ on all channels. For the benefit of interstate readers, 2JJ is Sydney's recently established "rock style" station on about 1500kHz, near the top end of the broadcast band.

Mind you, I couldn't blame her for complaining. It is bad enough to have a fault of any kind develop in a TV set, without having insult added to injury by it being one which brings in 2JJ. I mean, 2JJ is quite definitely an acquired taste; it certainly isn't my cup of tea and the D.O.L. could give me a few summers, so I suppose it would be even less to her taste than mine.

From a purely technical angle, I wasn't completely surprised that 2JJ was involved because she lives quite close to their transmitter. And, while I had not the faintest idea what had gone wrong, it is not unusual for solid state circuits to turn on some funny acts in the presence of RF signals. Even audio circuits are not immune, as one pop group found out recently when taxi calls found their way into a high power guitar amplifier.

When I was finally ushered into the D.O.L.'s lounge room she lost no time in demonstrating the fault. She switched on the set and up came 2JJ immediately—loud and clear. (Well, I think it was clear; it's a bit hard to tell with their programs!) Anyway, it was good room volume.

That much established I waited for a picture to appear. But after about a minute, with no sign of a picture, I tried another channel. Still no picture; just 2JJ rocking round the clock. This was a completely new development; there had been no mention of a picture failure in the message I received, nor had the

D.O.L. bothered to mention it when I arrived. She seemed to be completely obsessed by the presence of 2JJ on all channels.

"See," she said, "It's everywhere. I can't get rid of it."

"But", I pointed out, "There isn't any picture."

She barely acknowledged this fact.

"Yes, but I can't get rid of this radio station, even when I change channels I still get it."

I gave up. How do you explain to a D.O.L. that, technically, the absence of the picture was a far more significant symptom than the freakish reception of a radio signal? The truth is you don't; there is just no way. All the same, I did wonder how she would have reacted had I simply fixed the sound and left the set with no picture!

Delving into the back of the set I quickly established that the basic problem was simply lack of HT supply. As I mentioned earlier, the set was a hybrid type. More precisely, it was solid state with the exception of the vertical oscillator and output stages, and the horizontal output stage. The power supply was a two section arrangement; an HT supply delivering about 250V after the filter and a 16V supply for the solid state circuitry.

I traced the HT line back to the power supply printed board and finally concluded that there was no output from the bridge rectifier—four type OA110 diodes. So I promptly replaced all four diodes; only to find that I still had no HT.

In fact, I had made the mistake of not measuring the bridge output right at the diode terminals, but rather at a nearby terminal on the board which was marginally more accessible. Now I measured it right at the diodes, established that voltage was present, then began tracing the printed pattern, with the test prod, towards my previous check point.

Suddenly the set burst into life with an ear shattering roar—the D.O.L. had turned the volume full up in her efforts to get TV sound, and left it that way. I had

restored the HT with the prod by simply bridging a hairline crack in the pattern.

So that was it. A few moments' work with the soldering iron and I had bridged the break permanently and the set was back on the air—minus 2JJ.

But I was intrigued as to the cause of the hairline crack. This particular set has a 15W resistor connected after the bridge rectifier. It is quite a large device, nearly half an inch square and about one and three-quarter inches long, and is clamped hard down on the printed board. Over the years the heat from the resistor had buckled the board, eventually to the point where the copper track failed.

An inherent weakness which is worth remembering.

Equally intriguing was the reason why the set refused to receive the TV sound, since all the necessary circuitry was solid state and still operational. While I can't be sure, I imagine it was a function of the AGC system, which normally derives its controlling bias from the line output pulses. With no HT on the line output stage and no pulses, it seems likely that the bias of the tuner and video IF stages was so upset that they would not function in the normal way. And that left the way open for any strong RF signal to be rectified by the most convenient non-linearity it could find.

But I didn't try explaining that to the D.O.L.!

Another recent job was interesting in that it involved a colour TV set and a fault which I had heard about, but not seen before. The complaint amounted to lack of purity or, as the customer described it, "... coloured patches in the corners".

More precisely, when I saw the set the top left hand corner of the screen featured a cyan patch about 8 inches in diameter, with a similar area of green in the bottom left hand corner. It certainly produced some grotesque effects on certain types of picture.

My first impression was that either the purity had never been adjusted correctly or that someone had subsequently fiddled with the yoke position. So I loosened the yoke clamps, disconnected the blue and green guns, and tried for a normal red screen purity adjustment. It didn't take me many minutes to realise that this was not the answer; the purity adjustment just wouldn't work.

Then I did what I probably should have done first; degaussed the tube. But still no joy; the aberrations stubbornly persisted.

I was standing beside the set, wondering what to do next, and taking the weight off my feet by resting one hand on a nearby cabinet. Suddenly the penny dropped—the cabinet I was leaning on was one of a pair of speaker cabinets, the second one being in the opposite corner of the room.

But this one was only about 18 inches from the TV set. Could its magnetic field be strong enough to affect the set at this distance? I moved the cabinet about 6ft



# The world's most experienced maker of PAL colour TV uses this test equipment.

(So should you.)

Philips range of CTV test instruments are the result of 30 years of experience in Colour TV research, development and manufacture.

They are instruments of the very highest standard, used by Australian Technical Colleges and service schools for their training programmes.




**CTV Pattern Generator PM 5509**

Invaluable for servicing or aligning black/white and colour receivers as well as Video Cassette Recorders. It provides 5 colour and 5 black and white test patterns which can be electronically tuned to almost all available TV channels for video and audio.

**Analog Multimeter 2412**



In this professional standard unit 'hidden' errors (between 10 and 50% in conventional instruments) are eliminated. AC/DC voltage ranges: 100 mV-1 kV AC/DC current ranges: 1 micro A-1 A Resistance ranges: 100 ohms-10 M ohms.

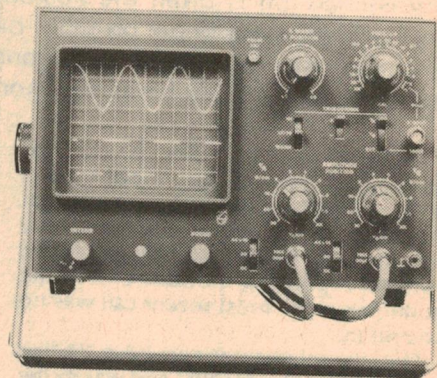


**Dual Trace Oscilloscope PM 3110**

This dual trace 10MHz oscilloscope has automatic triggering without necessity for level or stability control. Thus the signal is free-running showing a clearly visible trace at all times.

The Timebase switch is linked to the chopper/alternate function so change-over for optimum display is automatic. This control gives fully automatic derivation of line and frame once the triggering position is selected.

The PM 3110 can take knocks and abuse — making it ideal for TV service work.

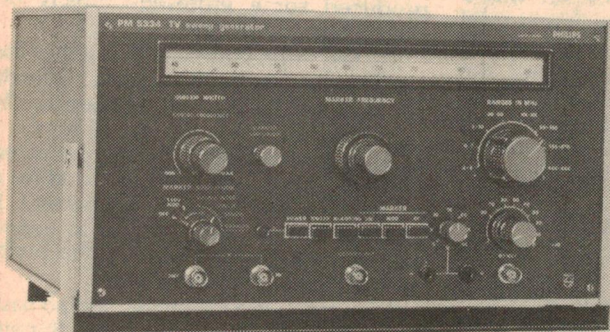

**CTV Sweep Generator PM 5334**

This enables quick and easy alignment and servicing of black/white and colour equipment. Sweep frequency is variable between 8 and 50 Hz. The stabilized RF output voltage can be alternated 80 dB down from max. of 200 mV (into 76 ohms load). It has one variable and three fixed markers.

Contact: Sydney 2 0223, Melbourne 69 0141, Adelaide 223 4022, Brisbane 44 2471, Perth 21 3131, Canberra 95 0321, Hobart 28 0121.

To Test & Measuring Instruments,  
Philips Scientific & Industrial Equipment,  
G.P.O. Box 2703, Sydney, New South Wales, 2001.

1. Please send me full details of your Philips PAL service equipment.
2. Please arrange a demonstration for me.

NAME .....

ORGANISATION .....

ADDRESS .....

POSTCODE .....



**Test and  
Measuring  
Instruments**

**PHILIPS**

38.2513



away and went through the degaussing routine again. Result: a beautiful pure red screen from corner to corner.

Only one problem remained; to get the message across to the lady of the household, who was a foreigner with only a limited command of English. I decided that this was a case where action speaks louder than words.

Leaving the red pattern on the screen, I called her into the room. "Oh lovely", she exclaimed, and I realised that I had put that part of the message across. Then I moved the speaker cabinet back to its old position, immediately destroying the even pattern. The reaction was a little delayed this time, but she was soon nodding her head vigorously and indicating that she understood.

Then, of course, I had to move the speaker away and degauss the tube again. Still, it was worth it, particularly as I sensed that even this operation was not lost on the lady.

As I said at the beginning, this is a fault I have heard a lot about but have never actually encountered. In fact, I have heard lots of stories about the dreadful things which household appliances can do to colour TV sets, mainly from reports in the daily press.

One of the things which these garbled reports invariably fail to mention is that such appliances, to the extent that they constitute a problem at all, do so only if they happen to be switched off in the immediate vicinity of the TV set. If a vacuum cleaner was close enough to a TV set when it (the cleaner) was switched off, and if the switch happened to break the circuit at or near the peak of the AC cycle, then the collapsing magnetic field could magnetise the picture tube shadow mask and/or the shield.

These reports also fail to mention that even if this did happen, the chances are good that the TV set's own degaussing circuit would take care of the problem the next time the set was switched on. In fact, the problem I have just described may well have responded to the set's degaussing circuit, once the speaker cabinet had been removed. The reason I used my own degaussing coil was to avoid waiting 15 to 20 minutes for the set's system to cool down.

After I had written the foregoing, I had the opportunity to discuss the problem with the service engineer of one of the larger set manufacturers. It so happens that he is an inquisitive type of person who wanted to prove or disprove the theory for himself. So he placed a typical domestic vacuum cleaner under one of their models, which stands on 9in legs, and proceeded to switch it on and off.

His conclusion was that the picture tube could be magnetised on an average of about one switch-off in 25, but that the degree of disturbance was well within the capability of the set's degaussing system, when switched on from cold.

So there you have it, straight from the horse's mouth!

## PICTURE TUBE QUICK-HEATING CATHODES

Recent overseas announcements have described a quick-heating type picture tube capable of producing a picture within five seconds of switching on. I was intrigued as to how this was achieved until I came across a brief but lucid article on the subject in a recent issue of "Elcoma Brief". It is reproduced below by kind permission of Philips Elcoma.

For many years the public have been accustomed to having instant sound when using transistor radio receivers, and in a similar way the transistorised sound circuits of television receivers can also provide this facility. However, since cathode ray tubes are still fitted with thermionic cathodes, it has so far not been possible to provide the "instant picture". As a general rule this means that after the set is switched on, the viewer may have to wait up to 30 seconds before the picture appears on the screen.

In an attempt to offset this disadvantage, some manufacturers have incorporated circuit designs which work on the principle that, when the receiver is switched off, the cathode ray tube heater remains in circuit, but operates at a slightly lower voltage than normal. This means that the cathode is allowed to remain hot, and when the viewer switches the receiver on again, the tube fairly quickly reaches its optimum working temperature, thus producing the effect of an instant picture.

Fig. 1. Conventional cathode construction as used in the Philips A66-140X picture tube.





Fig. 2. Quick-heating construction as used in the Philips 410X picture tube.

### Key details

1. Filament/heater
2. Cathode cylinder
3. Straps
4. First grid (g<sup>1</sup>) cylinder
5. Glass

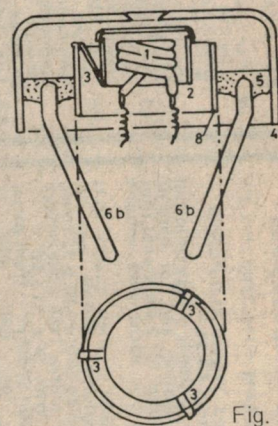

- 6a. Cathode support bars
- 6b. Heater support bars
7. Mica insulation
8. Cathode support tube

Since it is so relatively simple to produce "instant viewing" this way, why is it that more manufacturers do not provide this facility? In certain respects this question can be answered commercially but from a technical stand-point two rather important points are raised. Firstly the television receiver must always be connected to the mains supply in order to provide the "instant on" facility, which in itself may constitute a hazard.

Secondly, the receiver is consuming power whilst switched to the stand-by position, even though the equipment is not being used.

With these problems in mind, the quick-heating cathode-ray tube has been developed using a new type of cathode construction enabling a picture to be available on the screen within 5 seconds of switching the receiver on.

The main details of this new style cathode construction can be seen in comparison with the earlier version (see Figs. 1 & 2) and are given below:

1. The use of smaller components makes it possible to heat the cathode to the required temperature more rapidly.
2. The old-style construction with a long M-shaped filament has now been replaced by a more compact bifilar-wound heating coil.
3. The inside of the cathode cylinder is given a special coating which ensures very good conduction characteristics between the coil and the cathode.

The improved efficiency in warming-up time is achieved entirely by the cathode construction, and does not involve any increase in the total power supplied to the heating coil. In fact one of the many advantages of this type of tube is that the new design has resulted in a 20% reduction in the power required. The new construction is used in 22in and 26in colour shadow-mask tubes using 110° deflection, and 12in monochrome tubes.



## ALL GOODS ON SALE UNTIL SOLD OUT

1. 20 yds. Hook-Up Wire — 10/010 in 5 colours. \$1.00.
2. 40ft. Speaker Wire — Fig. 8 colour coded \$1.00.
3. 4 Philips V.D.R.'s — Experimenter's Pak with data. \$1.00.
4. 20ft. Single Shielded Cable — high quality grey. \$1.00.
5. 12ft. Twin Shielded Cable — Fig. 8 grey. \$1.00.
6. 4 — Alignment Tools — useful radio/T.V. types. \$1.80.
8. 200 — Assorted Screws/Nuts — suit electronics assembly. \$1.00.
9. Bonanza Jackpot — a wealth of all types of electronic parts for the Hobbyist/Experimenter. \$25 value for only \$5.00.
10. 2-Way Intercom — Master/Slave with 50ft Cord. \$10.95.
11. 50ft. Plastic spaghetti tubing — asstd. sizes/colours. \$1.00.
12. Crystal Microphone (high imp. 200-6000 Hz. \$1.95).
14. 25ft. Nylon Dial Cord — c/w 5 dial springs. \$1.00.
15. 27 MHz CB Crystals — Miniature type 3/8" pin spacing, matched transmit/receive, PAIR for only \$5.00.
16. 5-NE 2 Neon Bulbs — 60V operation, 100's uses \$1.00.
17. 10 — Volume Controls — some with switch, ganged. \$1.00.
18. 10 — Preset Pots — tab. mtg. TV types. \$1.00.
19. 4 — Transistor Sockets — 3 pin suit TO5, TO18 etc. \$1.00.
20. 3 — Transistor Sockets — TO3 Power Transistor. \$1.00.
21. P.C.B. Etching Kit — all the requirements including P.C.B. to make professional P.C. Boards. \$2.95.
22. 2-2 Pin Din Plug/Sockets — best quality. \$1.00.
23. 2-5 Pin Din Plug/Sockets — cheapest and best. \$1.20.
24. 3-4 x 1015 Pnelight Battery Holders black. plastic. \$1.00.
25. 12 — No. 216 Battery Clips — High Grade type. \$1.00.
26. Timing Dial Kit — Incl. tuning spindle, 3 x 3/8" pulleys, drum and dial cord etc. and instructions. \$1.00.
27. 3 — Magnetic 8 Ohm Ear Pieces — c/w 3.5mm plug. \$1.00.
28. 2 — Crystal Ear Pieces / c/w 3.5mm plug. \$1.20.
29. 15 Fuses, Std. 3AG — your choice 1/2A, 1A, 2A, 3A, 5A, 10A. \$1.00.
30. 2 — Panel Fuse Holders — Std. 3AG Screw In. \$1.00.
31. 1 — Chassis Fuse Holders — Std. 3AG Clip In. \$1.00.
32. 50 — Rubber Grommets — Asstd. useful sizes. \$1.00.
33. 10 — Jumper Leads — Asstd. Colours, Alligator Clips each end. \$2.00.
34. 4 — 2 Pin Speaker Plug/Socket sets — Polarised Type. \$1.30.
35. 3 — Push-button Switches — 1P Push to make. \$1.20.
36. 2 — Neon Screwdrivers — tests 180 — 500V A.C. or D.C. \$1.80.
38. 20 Rubber Feet — Asstd. sizes. black. \$1.00.
39. 20ft — 5 core solder — 16G 60/40 multicore. \$1.00.
40. 20 — Brass Spacers — 4BA clearance hole, Asstd. sizes. \$1.00.
41. 2 — pair multimeter test leads — 3mm prods each end. \$1.50.
42. 2 — I.C. Test Prods — mini-hooks, 1 red, 1 black. \$1.20.

DON'T MISS OUT — PLACE ORDERS NOW

## ALL GOODS ON SALE UNTIL SOLD OUT

43. 1 — Transistor tuning gang — std. type 1" x 1". \$1.00.
44. 1 — Strobe Tube and Trigger Transformer — matched set, high output. \$6.95.
45. Remote Control, T.V. Listener — easy to install device for private listening and for hard-of-hearing persons — outputs for 2 earphones (not incl. but available at 50c each) with volume control. \$3.50.
46. Extension Speaker Box — high quality hi-fi speaker box c/w volume control and 5" dynamic speaker 5W. Size 230 x 140 x 125mm, giving a beautiful clear sound. This is the deluxe model with aluminium trim. SPA. \$13.50.
48. Wall mounting Extension Speaker — front panel slopes downwards for wall mtg at approximately 6-8ft. high. Uses a super 5" 5W speaker and includes volume control. Size 240 x 165 x 95mm. Finished in imitation wood-grain vinyl. SP2. \$12.50.
49. Small Extension Speaker enclosure — compatible with smaller portable radios etc., it has all the beautiful features found in more expensive models. Uses 6" x 4" oval speaker with volume control. Size 200 x 135 x 90mm. Imitation woodgrain vinyl finish. SP1. \$12.20.
51. Hi-Fi Speaker Enclosure — a wall or shelf mounting speaker box for background music, small stereo systems or portable use, incorporates a large 6 1/2" hi-fi quality speaker with a 7W power rating. Freq. response from 60Hz to 14kHz imp. 8 ohms. Size 250 x 300 x 128mm. SP12. \$19.95.
53. 2 Way Super Hi-Fi Speaker Enclosure — this 2 speaker system features a specially designed 6 1/2" woofer with acoustic suspension speaker cone and a 2 1/2" cone type tweeter for super hi-fi performance. Power handling 10W, imp. 8 ohms, freq. response 60Hz to 15kHz. Features genuine walnut timber finish with satin aluminium trim. Size 216 x 350 x 222mm. Wood 150 suit all ardent music lovers. SP20. \$29.50.
54. Speaker Selector Switch — recessed for wall mounting — fits standard electrical mounting box. Allows 3 pairs of speakers to be switched in 7 different combinations, i.e. one on, two on, two on, one and two on, etc. etc. Features easy installation and attractive gold satin finish. \$5B2. \$7.50.
55. Speaker Selector Switch — surface mounting for horizontal or vertical operation. Allows 3 pairs of speakers to be switched in 7 different combinations, e.g. one on, two on, one and two on, etc. Its simple to wire your whole house for hi-fi sound in every room. B2. \$8.25.
57. Record Cleaner — a deluxe model free standing cleaning arm with cleaning brush and anti-static roller to clean the dirtiest of records. Arm is counter-balanced so it will not affect speed of turntable. Fits all record players and comes with spare roller. A "must" at only. \$3.95.
58. 4 Channel Stereo Adaptor — Universal 4 channel adaptor uses a novel new circuit to provide 4 channel sound from conventional 2 channel sources and for sound enhancement of "encoded" 4 channel stereo records. Connects to speaker output of almost any stereo amplifier — requires no power source. Imported — introductory price — Cat. No. 17-120-010. \$15.50.
59. Car Stereo Speakers — 5" heavy duty 4-5 Watt sloping-front cabinet for rear shelf operation in all types motor cars. Avail. in 4 or 8 ohms imp. Supplied with mtg. screws and connecting wire. SK709. \$11.80 pr. or \$6.25 each.

DON'T MISS OUT — PLACE ORDERS NOW

## ALL GOODS ON SALE UNTIL SOLD OUT

60. Car Stereo Speakers — flush mounting with long-life chromed grille incorporates 5" speaker of 4-5 Watts handling power. Available in 4 or 8 ohms impedance. Supplied with mounting screws and connecting wire. GK705. \$11.80 pr. or \$6.25 ea.
61. Car Stereo Speakers — same as above but with handsome black, soft vinyl grille and black plastic frame. GK705V. \$12.50 pr. or \$6.95 ea.
62. Car Stereo Speakers — a deluxe charcoal finished cast-metal cabinet houses a hi-fi quality twin-cone speaker for rear-shelf or under dash mounting. The sound is clean, clear and crisp. A "must" for camper-vans. etc. \$15.90 pr. or \$8.50 ea.
63. Top Cowl Car Antenna — a high quality fender mounting car radio antenna finished in gleaming chrome with approx. 6ft lead-in. \$3.25.
64. Lock-Down Car Antenna — beat the vandals! Extra high quality chrome finished — extends to 40 inches c/w approximately 6ft. lead-in. \$3.95.
65. Top Cowl Spring Loaded Antenna — a "snazzy" new spring loaded car radio antenna for fender mounting, beautifully chromed for all weather conditions. Complete with 6ft lead-in. \$3.50.
66. Motorised Car Antenna — press the button and it goes — press again and it retracts — thief-proof and trendsetting. Operates from 12 volt only, suits pos. or neg. ground. Guaranteed best quality. \$16.95.
67. Crystal Microphone — a lapel or hand-held microphone for small tape recorders and hobbyist projects. Supplied with 3.5mm earphone type phone plug. MG62. \$1.95.
68. Crystal Microphone — quality mic. for hand-held or table operation — suit most tape recorders and hobbyist projects, c/w 3.5mm plug. MC22. \$3.20.
69. Deluxe Crystal Microphone — a beautiful chrome — finished mic. with adjustable desk stand and 6ft. cable. General purpose use. MC72. \$6.99.
70. Deluxe Dynamic Microphone — same as above but includes high quality dynamic insert and transformer for high impedance 50K ohms. MD402. \$8.50.
71. Dynamic Microphone — attractive high impedance (50K ohms) microphone for hand-held or table operation. Suits most tape recorders etc. MD391. \$5.99.
72. Dynamic Cassette Type Microphone — a low impedance (200 ohms) dynamic mic. for use with most types cassette tape recorders — features on-off switch for remote control of tape recorder if required. For hand-held or table operation — comes complete with 3ft lead and "earphone-type" 3.5mm plugs. Freq. response 200Hz to 10kHz. A real bargain. MD17. \$3.25.
73. Deluxe Hi-Fi Dynamic Microphone — this omni-directional hand-held ball type microphone has a die-cast housing of satin chromed finish, on-off switch, mic. holder and approx. 9ft. shielded cable. Would suit high quality tape recorders, PA or singing use, store advertising or G.P. applications. Imp. 50K ohms, freq. response 100Hz to 10kHz, sensitivity — 58 dB at 1000 Hz, c/w 20ft. lead and 6.5mm phone plug. MD109. \$16.95.
74. Crystal Mono Cartridge — suit most imported record players. M110. Cat. No. 12-200-010. \$1.95.
75. Ceramic Mono Cartridge — as above. MC110. Cat. No. 12-200-011. \$1.95.

DON'T MISS OUT — PLACE ORDERS NOW

## plus FREE GIFTS

Choose according to scale:

- ORDER \$10 — 1 GIFT  
 \$20 — 2 GIFTS  
 \$40 — 5 GIFTS  
 \$80 — 12 GIFTS

- A** Miniature 200pf radio tuning gang  
**B** 2-earpieces 8 ohm with 3.5 mm plugs  
**C** Miniature plug-in 4 PDT relay in plastic case  
**D** 25-Asst Electrolytic Capacitors (all new)  
**E** 2-micro-miniature (gold) plugs/sockets 3 pin



# electronic agencies


THE MAIL ORDER  
DISCOUNT HOUSE  
P.O. Box E5, CONCORD 2137

Your money  
cheerfully  
REFUNDED  
if not fully  
satisfied.  
(less post/pack)

115-117 Parramatta Rd,  
(Cnr Lloyd George Ave.)  
CONCORD NSW 2137  
TELEPHONE (02) 747-6472

Trading Hours: 12:00 to 6 pm Mon-Fri.  
8:30 to 1pm Sat.

NOTE: Add postage, rated 10% order  
value. C.O.D.'s send \$2.00 prepayment.



## ALL GOODS ON SALE UNTIL SOLD OUT

118. Stereo headphones control box — allows 2 pairs of stereo headphones to be operated from any amplifier fitted with a standard 6.5mm headphone socket. Each pair of headphones has its own slider volume control and a stereo/mono switch is included. \$5.50.
119. 5-2 Pin Polarised Line Plug/Socket sets with covers. \$1.00.
120. 8 — Standard 3AG In-Line Plastic Fuse Holders. \$1.00.
121. Radio Dial Kit — hands-on clear plastic circular dial, all states dial scales, bush, etc., to suit most Japanese plastic tuning coils. \$1.00.
122. Tuning Condenser with dial standard 3/4" x 3/4", 200pF gang with radio dial kit as described above. \$2.00.
123. 10 Asstd. potentiometers — ideal for experimenters and hobbyists. All new and useful — includes preset, ganged, switched and standard types. \$1.00.
124. 12 Pot — Nuts and washers — shiny brass nuts and steel lock-washers. Keep 'em on hand — very useful. \$1.00.
125. 6V DC — DC Car Converter — plugs directly into any car cigarette lighter socket. For use with cassette tape recorder, transistor radio etc and provides regulated output up to 300 mA. \$6.90.
126. 9V DC — DC Car Converter — similar to above but 9V output. \$6.90.
127. Cassette Tape Splicer — for the adventurous Cassette Enthusiast or for repairing broken tapes, you need this handy little unit. Cuts and trims tapes in 2 operations — complete with instructions. \$3.95.
128. 6" side — Cutting Pliers — real forged steel; hand finished by continental craftsmen. Made in Sheffield England; best quality for all radio work, with insulated handles. Normally priced around \$2.95, our price just \$1.95.
129. 60 — Self-Tapping Screw Assortment. All Cadmium plated steel, various sizes suit radio and electronics work. \$1.00.
130. 120 — Steel Washers Assortment — made of quality bright steel, various sizes and hole gauges, suit electronics assembly. \$1.00.
131. 120 — High Grade Nut Assortment — various sizes incl. whit. and BA types and speed nuts, suit electronics assembly. \$1.00.
132. 100 — Screw Assortment — incl. countersunk, round head, hex head and in various sizes, all cadmium plated — no rust. \$1.00.
133. RCA Audio Leads — RCA phono plug each end of 1 metre shielded cable. Set of 2 for \$1.00.
134. Ignition Suppressor Resistors — insert in HT leads to suppress ignition interference. Pack of 3 for \$1.00.
135. Car Radio Suppressor Kit — includes 2 suppressor condensers, 1 HT lead resistor, 6 adaptor lugs, mounting hardware etc., and illustrated instruction sheet. \$1.95.
136. 3 — 240V Neon Bezel — safe, plastic neon indicators in orange, green, clear colours; include in built resistor, most popular types (normally 70c each) 3 for \$1.00.
137. Experimenters pack of 30 assorted electrolytics, all voltages; all new, quality stock. Range 100µF, 6V to 50V. Current price, approx. \$6.72. Our bulk-buy price, \$3.00.
138. Super Experimenters Pack containing 50 most popular useable electrolytic capacitors, guaranteed new and high quality. Range 22µF to 3300µF 6V to 160V. The normal price would be \$11.48; but the price now is only \$4.50 (just 9c each).
143. 2000mfd, 25VW Ducon Electrocs — brand new and guaranteed, insulated can type. 2 for \$1.50.

DON'T MISS OUT — PLACE ORDERS NOW

## ALL GOODS ON SALE UNTIL SOLD OUT

97. Radio Tuning Condenser — a 3 gang 4.5pF compact size tuning gang, standard 1/4" shaft — ideal for building, experimenting with or repairing radios, tuners etc. Brand new, cheapest in Australia! \$1.95.
98. 3 Bank Push-Button Switch — from McMurdo — a modern, miniature Isoslate switch bank for P.C. or lead wiring. Features 3 non-interlocking or independent DPDT switches mounted in one row with attractive black rectangular knobs. Would enhance the appearance of any amplifier or front panel. \$1.45 ea.
99. Transistor Tuning Gang No. 2, 3/4" x 3/4". A standard replacement type as used in most radios. 200pF per gang with built-in trimmers. \$1.00 ea. 10 for \$8.00 00 for \$65.00.
100. 3 — SPST Rotary Wafer Switches — standard OAK type, 3/8" mounting hole, 1/2" long shaft. \$1.00.
101. 2 — 3PDT Rotary Wafer Switches — standard OAK type, as above. \$1.00.
102. Rotary Wafer Switch — 3 position 9 hole triple wafer OAK Switch, latest type, 3/8" diameter mounting hole, 3/4" long shaft. \$1.00 ea.
103. 2 — Rotary Wafer Switches — 3 position plus mains on-off, 3 pole, 3/8" diameter mounting hole, 1/2" long knurled shaft. \$1.00.
104. 2 — Rotary wafer switches — 6 pole 3 position, dual wafer, OAK 'H' type, 3/8" diameter mounting hole, 1/2" long shaft. \$1.00.
105. 3 — Suppressor Condensers 0.5µF, 160VW for car ignition. \$1.00.
106. Selenium Bridge Rectifier — 20 volt, 6 amp suit battery charger, compact size 2 3/4" x 3 1/4" x 2". \$4.50.
107. Plug-In Headshell — standard replacement for most Japanese turntables and tone arms. 1/2" mtg holes suit all modern magnetic cartridges — attractively finished in matt black with chrome trim. \$4.50.
108. Plug-In Headshell — super lightweight model, similar to above but finished in satin aluminium. Greatly improves the appearance of your turntable. \$5.35.
109. Din to Din Lead — 6ft cord with 5 pin din plugs each end for connection between stereo amplifier and tape recorder or record/playback. \$2.95.
110. Computer Boards — these popular ex IBM Computer Boards size 5" x 2 1/2" are loaded with resistors, diodes, capacitors, transistors, chokes etc. Pack of 4 boards with a minimum of 12 transistors, only \$1.00.
111. 2 — Car Cigarette Lighter Plugs — very useful for auto accessories — suit most car cigarette lighter sockets. \$1.00.
112. 2 — Neon Indicator Bezels 250V A.C. — a very attractive square type red indicator. \$1.00.
113. 2-6 Volt Indicator Bezels — a beautifully chromed bezel complete with 6 Volt mini-globe. Available in red, green, amber. \$1.00.
114. 6 Earphone Plugs/Socket sets — standard 3.5mm plugs and panel mounting sockets, available in red/black. \$1.00.
115. 2 — Mono 6.5mm Plug/Socket sets — very useful for microphones, guitars, speakers etc. Comprises 2 plugs and 2 sockets (panel mounting) with changeover switch. \$1.00.
116. 2 — Stereo 6.5mm Plug/Socket sets — for all stereo applications, comprises 2 plugs and 2 panel mounting sockets. \$1.50.
117. 6 — RCA type plug/socket sets — standard audio input connectors for amplifiers etc. Comprises 6 plugs and 6 panel mounting sockets. \$1.00.

DON'T MISS OUT — PLACE ORDERS NOW

## ALL GOODS ON SALE UNTIL SOLD OUT

76. Crystal Stereo Cartridge — as above. S110. Cat. No. 12-200-012. \$2.95.
77. Crystal Mono Cartridge — "Ronnette" style with mtg. bracket 12-200-013. \$2.25.
78. M241. Cat. No. 12-200-013. \$2.25.
79. Ceramic Mono Cartridge — as above. MC241. Cat. No. 12-200-014. \$2.25.
80. Ceramic Stereo Cartridge — as above. SC243. Cat. No. 12-200-015. \$3.50.
81. Ceramic Stereo Cartridge — a good quality hi-fi stereo cartridge with excellent freq. response for small stereo systems and radiograms. Same as BSR Model C-1 cartridge. Cat. No. 12-200-017. \$4.95.
82. Auto 12 Volt, 4 Amp Battery Charger. Most powerful for its size available in the World! Fully approved by all electrical authorities. Full wave circuit with foolproof fusing. Automatically charges 12 volt batteries from flat to full-charge overnight. Housed in attractive, unbreakable, double insulated plastic case. Size only 5 1/4" long, 3 3/4" wide, 3 1/4" high. Factory guaranteed. \$24.
83. Amazing Telephone Conversation Pick-Up Coil. Simply mount this handy little unit on the back of your telephone to record conversations clearly and easily. Connects to mic. socket on any tape recorder. Supplied with 1 metre lead and 3.5mm Plug. \$1.95.
84. Invisible Tape Antenna — a revolutionary adhesive tape antenna which may be fitted around front windscreen or rear window — self adhesive. Gives clear reception on all stations. \$2.25 ea.
85. Rola 2 1/4" 25 ohm Speaker — for transistor radios, tape-recorders, amplifiers, hobbyists etc. Type 225A. Normally priced at \$2.30. Sale Price \$1.00 ea.
86. Ferrite Aerial Rods — 3/8" diameter rod by inches long. Ideal for radio servicemen etc. 3 for \$1.20.
87. Ferrite Aerial Rods — 3/8" diameter x long. A useful size which fits most radios. 2 for \$1.00.
88. Ferrite Aerial Rods — a flat ferrite rod 0.75 ins x 0.2 in x 5 1/2" long. Suits many Japanese Radios including National. \$2.25 each.
89. Ferrite Aerials with coils — 1/2" diameter x 8" long. A large ferrite rod for mantel radios and larger type portables; complete with 2 section coil. Individually packed in styrofoam No. 7124. \$1.00.
90. Ferrite Aerial with coils — a 3/8" diameter x 6 1/8" long rod with 2 separate coils for increased versatility. Would suit most radio sets. No. 7126. \$1.00.
91. Ferrite Aerial with coils — a 3/8" diameter x 6 1/8" long rod with standard 2 section coil — a very popular type. No. 7122. \$1.00 ea.
92. Ferrite Aerial with coils — a 3/8" diameter x 8" long rod with standard 2 section coil — suits most popular radios. No. 7118. \$1.00 ea.
93. Ferrite Aerial with Coil — a small flat ferrite rod 0.65" x 0.15" x 2.2" long with standard 2 section coil. \$1.00 ea.
94. Ferrite Aerial with Coil — a large flat ferrite rod. 0.65" x 0.15" x 5.2" long with standard 2 section coil. \$1.00 ea.
95. Radio Knob Assd. a selection of 15 useful plastic and metal knobs suit car radios, mantels, portables, transistors etc. \$5 for \$1.00.
96. Miniature 5K ohm volume controls — for transistor radios. Universal type used by most manufacturers. Ideal for building pocket radios and for repairs. 4 supplied with plastic knobs and for only \$1.00.

DON'T MISS OUT — PLACE ORDERS NOW



# The measurement of "Q" -and an economy Q-meter

Here is a novel design for an easy to build, low cost Q-meter. Fully solid state, it incorporates a low distortion RF oscillator and a measurement bridge system using two MOSFETs. The author gives full coil details to cover the frequency range from 250kHz to 23MHz.

by F. G. CANNING, FIREE (Aust)\*

Some years ago an American technical magazine carried a reader's letter with which, rightly or wrongly, I profoundly disagreed. The writer of the letter was complaining that the amount of space being devoted to constructional projects was excessive. He concluded on a rather supercilious note by saying that "he supposed he would have to put up with it until the readers learned to act like engineers and buy their instruments ready-made."

Apart from the obvious fact that a host of small laboratories, both private and commercial, simply do not have the funds to buy numbers of expensive and highly-specialised instruments which sit idle on the bench for most of the time, it may be doubted if it is wise to breed a generation of technologists to whom the possession of manufactured and specialised "black boxes" is indispensable to their daily work, particularly if they have only a hazy acquaintance with their internals and principles. The tendency for the young graduate engineer or technician to seem rather helpless in his job unless provided with thousands of dollars worth of sophisticated instruments, like those on which he presumably was trained, was becoming noticeable in industry many years ago and the increasing complexity of electronics is probably accelerating the process.

All the same, it is true that some of the specialised instruments do save much time and effort in experimental design work and anyone who has had daily access to a good commercial Q-meter knows that it comes to seem indispensable.

This article describes a rather simple arrangement for Q measurements over a limited frequency-range, which can be made up cheaply by an experimenter and requires only the simplest calibration to give acceptable results. The circuits

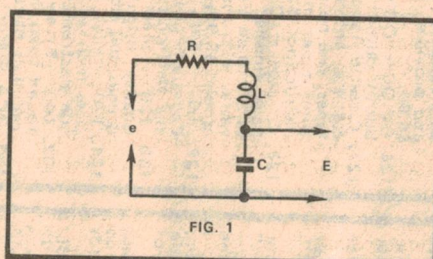


FIG. 1

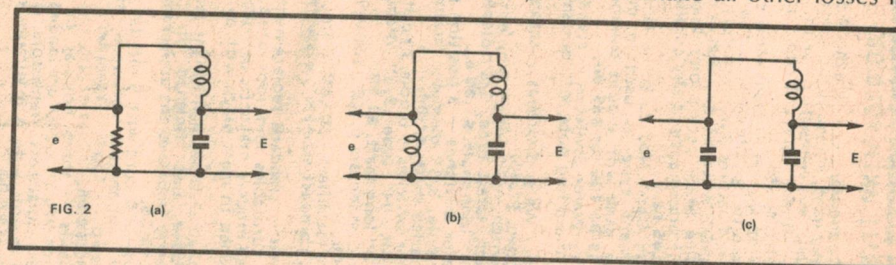


FIG. 2

used are not new, but some work was done to make them practicable.

**DEFINITION OF "Q":** The symbol  $Q$ , first popularised in the USA, refers to that property of a resonant circuit which has been called "circuit magnification factor" in Britain and parts of Europe. It is an indicator of the quality of a circuit or component and is defined as the ratio of reactance to resistance at the test frequency; thus  $Q = X/R = 2\pi fL/R = 1/2\pi fCR$ . Note especially that  $R$  is the total AC resistance of the complete resonant circuit, not that of any individual component.

**BASIC CIRCUITS:** Fig. 1 shows a simple series-resonant circuit corresponding to the above equations. If we inject a small EMF, denoted by  $e$ , at a frequency  $f$ , in series with the tuned circuit, a current  $i$  of the value  $e/R$  will flow when the circuit is tuned to resonance with  $f$ . Then the EMF generated across the inductance will be  $(i \times XL)$  which at resonance equals  $(i \times XC)$ .

We have seen that the  $Q$ , or magnification, of the complete circuit is  $Q = X/R$  or  $iX/iR$ ; thus  $Q$  equals the ratio of the

EMF  $E$  developed across either of the reactances, at resonance, to the injected EMF  $e$ ; or  $Q = E/e$ . So if we can inject the signal  $e$  at a constant level, we can then use an RF voltmeter of negligible losses connected across either the inductor  $L$  or the capacitor  $C$  and calibrate it to read  $Q$  directly.

Remember that  $R$  in the equations is not the ohmic resistance of any part of the circuit but, rather, the total AC resistance of the complete circuit at the test frequency; therefore we are measuring the  $Q$  of the whole circuit, and not that of any component. This means that if we want to know, for example, the  $Q$  of the inductor  $L$  (in which most of the circuit losses are likely to reside) we must use every effort to make all other losses in

the circuit negligible. Fortunately this can usually be done and the ratio  $E/e$  can then be taken as the true  $Q$  of the inductor or other component under test. Actually, there are several associated factors, such as the self-capacitance of inductors, which make an absolute value of  $Q$  difficult to measure directly, but they are too complex to take into account here; it is sufficient to remember that the measured value of  $Q$  will always be lower than the true value by a few per cent.

There are, however, some points which must be observed if anything like a true  $Q$  value is to be obtained. These are:

(a) The means used to inject the signal  $e$  must introduce a negligible additional loss into the circuit.

(b) The voltmeter which measures the magnified signal  $E$  must have extremely high input impedance and negligible losses, or it will load the tuned circuit and reduce the effective  $Q$ .

(c) Unless the voltmeter has an accurate square-law response (which almost none of them have, at least over the voltage range needed here) it is necessary that

\*30 Back Beach Road, Portsea, Vic. 3944.



the injected signal shall have a pure sine wave-form, otherwise the voltage readings may be unreliable. This is an important point which seems seldom to be brought out.

(d) The injected signal must come only from the injection point; i.e., there must be no stray coupling or leakage of signal between the signal source or oscillator and the measuring circuit. This is not always easy to achieve.

Fig. 2 shows three possible ways of injecting the signal. All three are used in commercial instruments, the choice being dictated largely by the frequency involved. What we really want is to develop the injected Q-meter EMF across an impedance of zero magnitude in series with the tuned circuit. As this is an impossibility we have to be content to inject across a very small pure resistance or pure reactance.

Fig. 2a shows injection across a resistor, usually of around .01 to .03 ohm, small enough to be negligible with respect to the rest of the circuit resistance and specially constructed to have RF resistance virtually equal to its DC value. The method is useful for frequencies up to about 25MHz, after which it becomes increasingly inaccurate due to rising RF resistance.

Figs. 2b and 2c show injection across a small inductive reactance and a small capacitive reactance respectively. Inductive injection is often used for frequencies above, say, 20MHz because its resistance and capacitive losses can be made small enough to leave the tuned circuit almost unaffected, but for lower frequencies the reactance falls to such a low value that an impracticably powerful oscillator is needed to maintain the injected voltage at the proper value. The inductor used may be of about 0.1 millimicrohenry.

Capacitive injection (2c) calls for a large capacitor of zero inductance and very low losses; it has the opposite characteristic to 2b, working well at low to medium frequencies but failing above about 25MHz because of increasing demands on the oscillator which begins to see something like a short-circuit. The residual inductance of the capacitor also becomes troublesome.

2a and 2b are not practicable for the small laboratory because of difficulty of construction and measurement to the accuracy needed. 2c, however, is straightforward if its frequency limitation can be accepted, because the capacitive components can be bought with sufficient accuracy or built up with the help of a simple capacitance bridge. This is the method used here. It has the further advantage that small stray capacitances are less likely to affect the injected voltage.

**BLOCK DIAGRAM.** Fig. 3 shows the essentials of the proposed arrangement. A well-screened tunable RF oscillator with a continuously-variable output, capable of supplying 1 volt RMS to the

Q-meter input at all frequencies of interest, feeds the Q-meter through a short co-axial RF cable. This standard input of 1 volt is reduced through a capacitive potentiometer to .01 volt for injection into the Q-meter circuit which is tuned by a low-loss variable air-dielectric capacitor. The magnified voltage appearing across the tuned circuit at resonance is measured on a VTVM or other RF voltmeter having scales of 0 to 1 and 0 to 5 or 10 volts. The same voltmeter, on its 1 volt range, can be switched to measure the 1 volt input to the Q-meter. Thus, with the input set to 1 volt and reduced by the capacitive potentiometer to .01 volt for injection, an output of 1 volt across the tuned circuit represents a Q of 100; likewise any observed output voltage, multiplied by 100, represents the Q of the circuit or of the coil under test in the case of an inductor. No additional meters are needed in either oscillator or Q-meter. The high-impedance voltmeter with RF probe which I described in the November 1974 issue of "Electronics Australia" is very suitable for this purpose, but any RF voltmeter with appropriate scales could be used. The Q-meter incorporates impedance-transforming buffers which make very high voltmeter input impedance unnecessary.

## FUNDAMENTAL OSCILLATOR CIRCUIT.

This is a rather unusual but very useful push-pull long-tail arrangement using small-signal high gain transistors of the cheapest kind. Fig. 4 shows its essentials. The circuit first came to my notice in an interesting and valuable paper on transistor oscillators by P.J. Baxandall (1) published in 1960. A vigorous oscillator of good stability and fairly high efficiency, it can give a pure RF waveform with distortion as low as 0.1%. As can be seen, the number of parts required is minimal.

The turns ratio of the feedback winding, base to collector, is about 1:10 and not critical. Oscillation is obtainable up to about a quarter of the transition frequency  $f_t$  of the transistors used, and down to very low audio frequencies. By making the emitter resistor RE variable a moderate degree of amplitude control can be had without distortion. The load resistor RL, shown dotted, is usually needed below about 5MHz in a tunable oscillator to prevent saturation of Tr2, which can produce distortion. The base battery can be 1½ or 3 volts, the collector battery of 9 to 18 volts according to output required. Note the polarity of the windings; both are in same direction and F indicates finish. The closest magnetic




FIG. 3

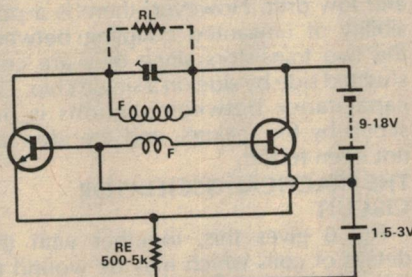


FIG. 4

coupling and the least capacitive coupling between windings is, as usual, to be aimed for; windings arranged in a single layer, end-to-end and close together seem satisfactory.

Anyone who may have found transistor oscillators at all tricky might be recommended to give this circuit a trial for other purposes. A limiting resistor of about 200 ohms permanently in series with RE is a wise precaution to prevent accidental reduction of the emitter resistor to zero, with probable damage to the transistors. RL is not critical and may be around 20k ohms for a start.

## FUNDAMENTAL Q = METER CIRCUIT.

This is shown, in essentials, in Fig. 5. The scheme was originally suggested by J. Luijckx(2) and his version used a twin-triode valve of RF type. In that form it works well and presents few problems, but it was felt that a semiconductor version was worth developing. It consists basically of two matched RF buffer circuits of the source-follower type, one measuring the RF input from the oscillator and the other the magnified voltage across the tuned circuit, with a switch to connect an external voltmeter to either buffer. The input of 1 volt, monitored by Tr2 and the external voltmeter with switch S set to "V", is applied to the

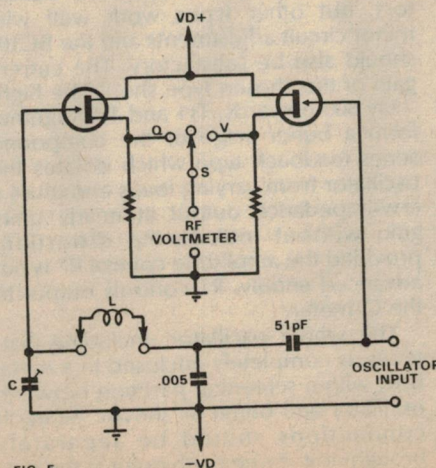


FIG. 5



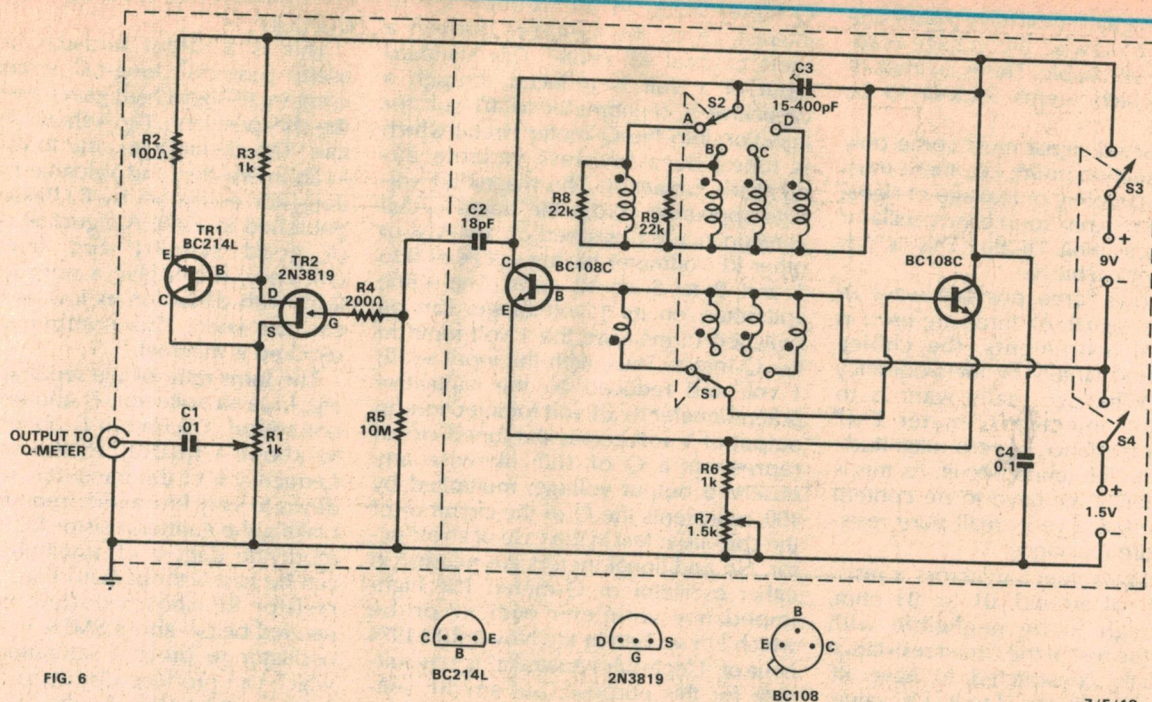


FIG. 6

Fig. 6: practical oscillator circuit for use with the Q-meter.

capacitive potentiometer formed by the capacitors of 51pF and 5000pF. A voltage of .01 volt is thereby injected into the tuned circuit across the 5000pF capacitor which is common to both circuits.

This capacitor is too large to seriously affect the tuning and if its losses and residual inductance are minimal it will not appreciably reduce the circuit Q.

The magnified voltage corresponding to the Q appears across the tuning capacitor C and is monitored by Tr1 and the same external voltmeter with switch S set to "Q". Inductor L represents a coil whose Q is to be measured, connected to the terminals provided. A number of plug-in coils can be provided as accessories, to permit checking of other components such as fixed capacitors or RF chokes by connecting them across the complete tuned circuit.

Field-effect transistors more nearly match the very high input resistance and low losses of the original valve circuit than do bipolar transistors. They are connected as source-followers to more thoroughly isolate the voltmeter from the tuned circuit and oscillator. In the practical circuit this thought was carried further by using MOSFETs (with insulated gate) instead of the junction FETs of Fig. 5. They are fully comparable with valves in respect of high input resistance and low RF losses, and the effect of Tr1 on the Q of the tuned circuit is then negligible.

The only real difficulty about this is that the two buffers should be closely matched over the working voltage range. Twin-triode valves usually give little trouble, but MOSFETs vary much more widely and this presented a problem which has been overcome with fair suc-

cess in the final circuit. From a stock of four RCA 40468 MOSFETs it was found possible to select two which tracked sufficiently well as a pair.

On paper, an attractive alternative might be the substitution of a monolithic pair of junction FETs in a single case, such as the National Semiconductor dual J-FETs 2N3955 or 2N5912, as these are especially designed for close tracking and low drift. However, there is a possibility of unwanted coupling between the two transistors since they are constructed side by side on a single chip. The capacitance between sections is not stated by the makers, and the idea has not been tested.

#### THE PRACTICAL OSCILLATOR CIRCUIT

Fig. 6 gives this, together with the details of coils which may be wound to cover frequencies from 250kHz to 23MHz approximately. The oscillator proper uses a pair of BC108C transistors, but other types work well with minor circuit adjustments and the BC109 should also be satisfactory. The current gain of the chosen type should be high—say 300 upwards. Tr1 and Tr2 together form a buffer stage of the compound series-feedback type which isolates the oscillator from varying loads and gives a low-impedance output at nearly unity gain without introducing distortion, provided the amplitude control R7 is not advanced unduly. R1 controls output to the Q-meter.

The whole oscillator, including batteries, is completely enclosed in a metal box, with a screening partition between oscillator and buffer as shown. All earth connections should be separately brought to the one earth point at the out-

put co-axial socket. Note that neither side of the tuning capacitor is directly earthed. An insulating coupling between its shaft and the outside control dial or knob removes hand-capacitance detuning. The linear type output control R1 may be of either carbon or wire-wound type. The isolating capacitor C1 is not needed for use with the Q-meter, but is included to allow the oscillator to be used separately for other purposes where the output load may be conductive.

#### THE PRACTICAL Q-METER CIRCUIT.

Fig. 7 gives this circuit. The only critical components are the voltage-divider capacitors C6 and C7, which for accurate Q measurements should ideally be of  $\pm 1\%$  tolerance, or as near as can be managed. 50pF will be the nearest size commercially obtainable for C7 and should be good enough. If the "preferred value" series is obtainable, C6 and C7 can be made 47pF and 4700pF respectively. They must both be of the silvered-mica type and the wire joining them should be fairly short and of low capacitance to metalwork and other components. C6 must be joined to the "L" terminal and to the tuning capacitor C2 by the shortest possible portions of its own pigtailed to a minimum. The actual layout will depend somewhat on what is used for C2, which should be of the best quality obtainable, if possible with ceramic stator insulation. A straight-line-capacitance law (i.e., with semi-circular rotor plates) is perhaps best on the whole, giving a more rational capacitance calibration.

C3, a variable air trimmer of 30 to 50pF maximum with an external dial, together with the "C" terminals or sockets, can be



## ECONOMY Q-METER

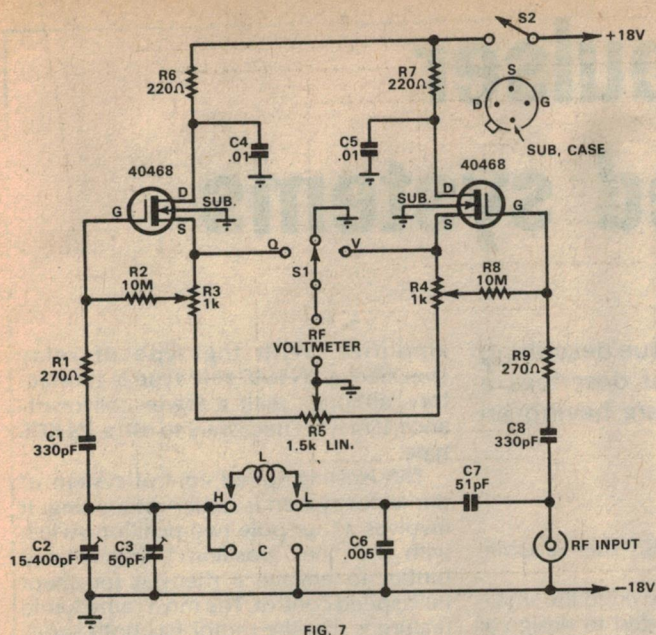


FIG. 7

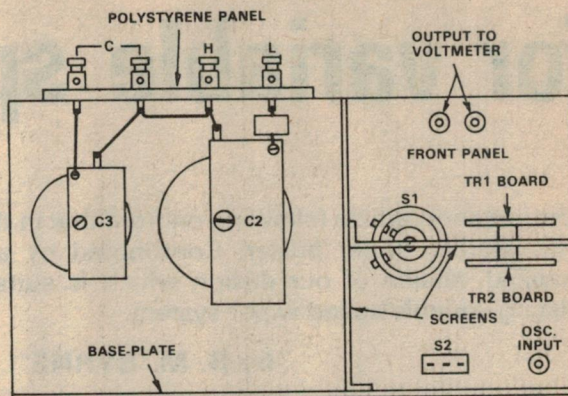


FIG. 8

Fig. 7 (at left) shows the practical Q-meter circuit, while Fig. 8 (above) shows a rear view of the suggested circuit layout.

omitted if desired but is very useful for fine tuning and as a means of measuring small capacitors and the capacitance and Q of switches, sockets, RF chokes, etc. If included it should have ceramic insulation and it is normally set at half-capacitance; its dial is then calibrated in plus and minus picofarads either side of this zero point. If C2 is to be calibrated in capacitance (very desirable), C3 should be set at half-scale and its capacitance included as though part of C2. Also include C6 in such calibration.

The chosen MOSFETs have a fourth lead-out connected to the substrate and to the case, denoted by the arrow; this must be grounded. Their drains are decoupled and effectively grounded by C4 and C5 which can be ceramic types. The external voltmeter is switched between their sources by S1. Note the idle contact between the V and Q contacts; this must be grounded, again to reduce stray coupling. The source bias and load resistors R3 and R4 are linear carbon trimming potentiometers with their sliders connected through R2 and R8 to the gates; by this means the gate bias can be set to equalise the drain currents. R5 is afterwards used to equalise gain.

It is not essential to completely screen the Q-meter, though it may be helpful in locations subject to electrical interference. However, the two halves of the voltage-measuring circuit must be separately assembled, each on its own circuit-board or tag-strip, and these two assemblies must be separated from each other and from the tuning capacitors and coil terminals by grounded metal screening plates. Fig. 8 shows a rear view of a suggested layout but details and dimensions are left to the constructor according to what he has available. Note that the horizontal screen bisecting the switch S1 should be brought as close as possible to the switch, in line with the previously-mentioned idle contact which

should be grounded to the screen at this point.

The two transistors, each with its associated components, can be assembled on two small panels of Veroboard or any first-grade insulating material, but it is desirable to mount C1, R1 and the gate connection of Tr1 on ceramic stand-off pillars or similar low-loss material to reduce losses. The sockets or terminals for L and C measurements ought preferably to be mounted on a panel of sheet polystyrene to keep RF losses to near zero. This material is not easy to buy in sheet form but useful pieces can often be had in hardware departments in the form of plastic boxes or containers, which are usually cheap. It can easily be distinguished from other plastics by its peculiar metallic tinkle when dropped or struck. Choose clear material in preference to coloured kinds, and be careful when soldering on or near it—it will not tolerate heat, even as low as 100°C, without softening. And never allow kerosene or any other petroleum spirit on or near it, or it will "craze" or crack. Other good materials would be polyethylene (polythene), Teflon or polycarbonate, if obtainable in sufficient thickness, but all are rather flexible and may need some support. First-grade ruby mica is also satisfactory and can sometimes be had from suppliers of insulating materials in sufficient thickness to make small panels of adequate strength. Its cut edges are best sealed against moisture with a good tropical waterproof varnish or wax before finally mounting in place.

Input to the Q-meter is by a 50 ohm or 75 ohm RF coaxial cable about 9 inches long with a suitable RF plug at each end, to match corresponding sockets on oscillator and Q-meter. Output to the voltmeter would ideally be by a similar socket and plug but this could be inconvenient, and if the previously-described voltmeter and probe is to be

used, two terminals on the Q-meter will be more suitable to receive the existing crocodile clips on the probe.

**SETTING UP.** (1) Set R3, R4, and R5 of the Q-meter to around half their travel. Connect a multimeter, set to a low DC volts range, temporarily across the drains of Tr1 and Tr2. Connect a 10mA meter in series with the 18-volt supply. Switch on and adjust R3 and R4 until the multimeter reads zero volts (indicating equal drain currents) and the total supply current is about 3 milliamps. Switch off and disconnect the multimeter.

(2) Temporarily disconnect the tuning capacitors C2 and C3 from terminal "H" and connect this terminal to the RF input (junction of C7 and C8). Connect up the oscillator and voltmeter and switch on. Adjust the oscillator output to give a reading of about 1 volt on the voltmeter, then adjust R5 until throwing S1 from "V" to "Q" gives the same voltage reading. The two buffers are now balanced. Restore the connections to C2 and C3.

If these procedures (1) and (2) cannot be made to give equal "V" and "Q" readings, Tr1 and Tr2 differ too much in their characteristics and another pair will have to be selected. I found it helpful to make up the essentials of the two buffers, less tuning circuits, temporarily on a single panel of Veroboard provided with two transistor sockets, to permit the above balancing procedure to be proved before permanent installation in the Q-meter.

**OPERATION.** This is quite simple. With the voltmeter on its 1 volt scale and S1 of the Q-meter set to "V", switch on the oscillator, set its output control to give about 0.75 volt reading, and adjust the oscillator amplitude control R7 while watching the voltmeter. Note the position of R7 at which the voltage ceases to rise and then back off R7 until the voltage falls by 5 to 10%. The waveform

(Continued on page 107)



# Modified wiper pulser for variable speed systems

Here is a short article following on from that in the May issue describing a windscreen wiper pulser. Contributed by a reader, it describes a modified version of our design which is suitable for cars having an existing variable speed wiper system.

by B. M. BYRNE\*

In the May 1975 article of EA describing a variable delay one-shot windshield wiper, it was noted that the circuit was unsuitable for existing variable speed wipers. It went on to say that these wipers were probably completely satisfactory anyway, but my experiences have shown this to be untrue.

I fitted a single delay, relay/capacitor unit in my previous vehicle, and was reasonably satisfied with it for eight or nine years. But two years ago I changed vehicles and found that my new vehicle had variable speed wipers. These were not satisfactory in all weather situations.

In actual practice the variable speed system has really only a two speed range—about the same as any other two speed system, but with the wipers continuously variable —unnecessarily —

between the two limits. The variable aspect is futile.

Happily your article provided the small amount of input I needed to design a modified version which is suitable for use with a variable speed system. The design has been constructed and tested, although not yet permanently installed in the car.

The main variations from the design presented in the May issue can be seen by inspecting the circuit diagram. I have used a rotary switch instead of pushbuttons, as this involves less dashboard clutter. The number of clicks around is easy to sort out without looking away from the road. As a bonus, it is easy to incorporate extra delays, by using a six-position switch.


A larger relay, with four changeover springsets is necessary. The heavier load of the springsets is associated with a lower resistance coil, so it is necessary to use a discrete transistor as a power

amplifier. With the type of relay specified, a 2N3645 PNP type is satisfactory, although with a lower coil resistance, it may be necessary to use a 2N4036 type.

The existing speed control system of the wiper system is rather astounding. It involves a four pole two position switch with the "on" position being rotated further to engage a rheostat for shunt field speed control. The most remarkable feature is that the motor has both series and shunt wound fields, with the park switch actuated by the motor running in the "on" position.

When the wipers are switched off, the motor fields are connected in series, and in reverse polarity. The park switch then opens when it senses the reverse rotation at the end of the wiper travel. In order to achieve the desired delay system, it is necessary to simulate the action of the control switch exactly. Hence the requirement for a four spring set relay.

By taking the power supply from the "off" position of Sla, the wiper switch overrides the timer, dropping it out in "mid-flight" if necessary. The reset time adjustment trimpot has to be set to leave the timer long enough in the "on" phase to ensure enough motor rotation to operate the park switch. At the end of

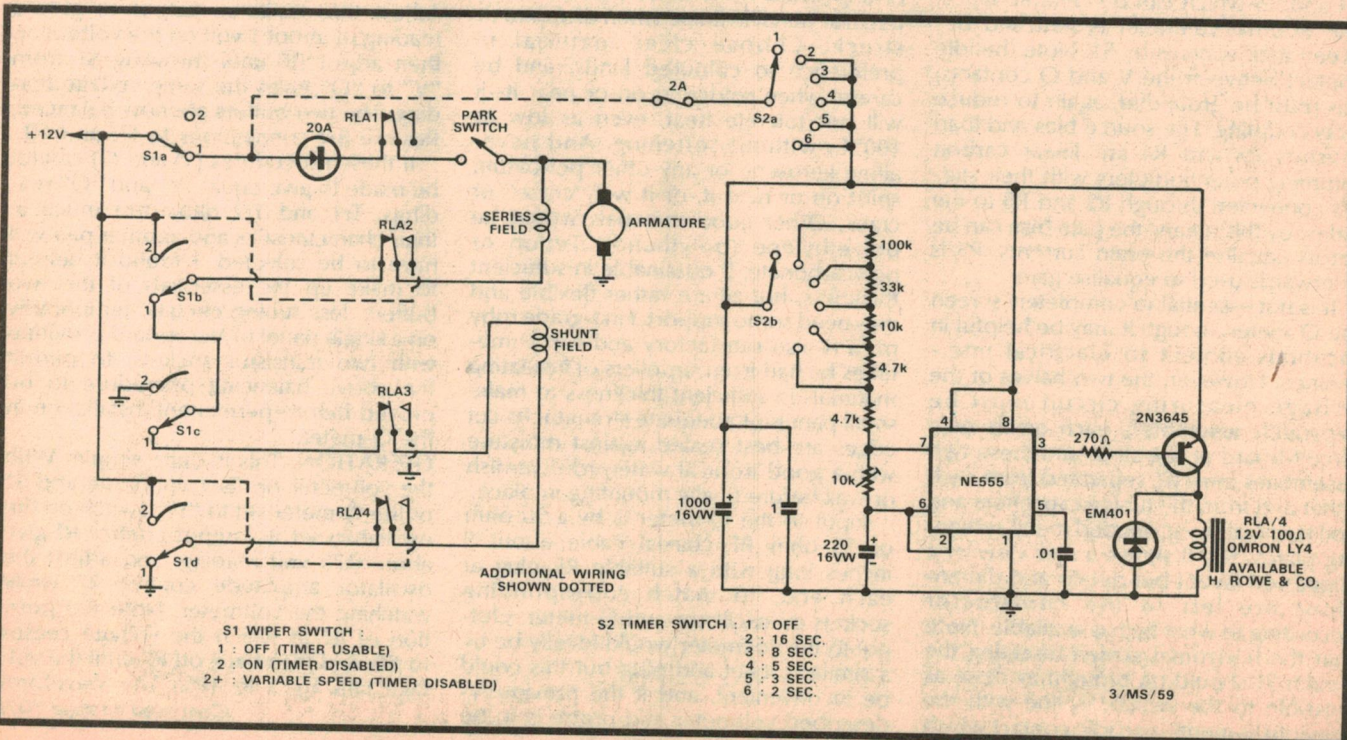



the delay, the wipers park by the same surprising field reversal system.

The 20A automotive diode, on a 1250 sq. mm heatsink, is to prevent inadvertent operation of the timer from the voltage drop across the motor armature when in ordinary wiper service.

While this system may not accommodate exactly every variable speed drive, I believe it can be adapted to suit most such systems. Vehicles fitted with the wound series and shunt field system as described in this article include the Rambler range—Matador, Javelin, and probably the earlier Rebel. Early Dodges are also fitted with this system, as is the Leyland P76.

The approach of this circuit system is suitable for virtually any vehicle at all, providing it has a self-park wiper system. With four changeover springsets, it is possible to "dip" into any circuit, with the "break" legs of the springset providing the override facility for normal control, and the "make" legs completing the circuit when pulsed.

The main difficulty in fitting the unit to any particular car is to sort out the wires at the rear of the wiper switch. This is best done by using the vehicle workshop manual, and observing the colour code. The actual method of construction, and the way in which the unit is installed, will depend quite heavily on the type of vehicle, and the available dashboard space, so no details have been included. ②



*Manufacturers of:  
Electrical / electronic  
equipment, wound  
components and  
lighting control  
equipment.*

**BRANCHES  
IN  
ALL STATES**

**Ferguson Transformers  
Pty Ltd.**

Head Office  
331 High Street, Chatswood  
NSW 2067

PO Box 301 Chatswood,  
NSW, Australia 2067

Phone: 02-407-0261

# BIG REWARDS WAIT FOR YOU IN COLOUR TELEVISION SERVICING *-if you're trained for it!*

Colour TV is the exciting breakthrough for the electronics service industry. It offers a great future for the service man who's gained the knowledge necessary to do the job.

Stott's have introduced a course designed to take you, step by step, all the way from basic electronic theory through to colour television receiver servicing techniques.

If you're a beginner, it can teach you everything you need to know about television principles and receiver circuitry.

If you are already working in the field or have already successfully completed some studies in electronics, you may be eligible to commence the course at an advanced stage.


Divided into three sections, the Stott's course covers:

- Part 1 — Introduction to Electronics (theory and practice)
- Part 2 — Monochrome Television Receivers.
- Part 3 — Colour Television including fundamentals, colour processing circuitry, servicing techniques and faults.

Like all Stott's courses, you will work with your own instructor, an expert in this exciting field, at your own pace, in your own home. Whether you intend to enter the television service industry, or whether you wish to gain a thorough understanding of television theory and servicing as an aid to sales experience, this is the course to help you make it.

Other electronic courses offered by Stott's include:  
Radio for Amateurs — Amateur Operator's Certificate

For full information mail this coupon today:

**Stotts**  159 Flinders La, Melb., 3000  
383 George St, Sydney, 2000  
290 Adelaide St, Brisbane, 4000  
66 King William St, Kent Town 5067  
89 St. George's Tce, Perth, 6000  
P.O. Box 3396, Singapore 1

**TECHNICAL CORRESPONDENCE  
COLLEGE**

The name to trust in correspondence education

Please send me free, and without obligation, full details of the following courses

Stott's undertake that no sales counsellor will call

Mr, Mrs, Miss..... Age.....

Address.....

Postcode.....

EAL 75

STC761



# Beginners World

## YOUR ONE-STOP HOBBY SHOP FOR ELECTRONICS

### HOBBYIST STORAGE CABINETS

**\$8.90** P & P \$1.20

Save time and money! Use these beautiful "Capstan" drawers to store and segregate all your small parts etc. Each cabinet has 12 clear plastic drawers with up to 3 sections per drawer (total 36). Choice of 4 bright colours.



### NEW SOLAR CELL KIT

**\$12.50** P & P \$1.00

Ideal experimenters kit. Includes 7 assorted solar and photo cells, plus a 24 page project instruction manual. Build 100's of different useful circuits with this kit.



### SELF-ADHESIVE LABELS FOR HOME CONSTRUCTORS

We all like to build our own projects, but its usually difficult to provide that professional appearance, so we designed these attractive "stick-on" labels with over 90 different symbols and numbers on each sheet. Available in 5 colours.

**75c each sheet.**

### EARPIECES

Crystal 3.5mm plug, 85c; Magnetic 2.5mm plug, 50c; Magnetic 3.5mm plug, 50c.

**Miniature tuning capacitors**  
Ideal for crystal sets, transistor radios, hobbyist projects, servicemen. Twin gang, ea 290pf; size 200 x 200mm. \$1. Pack and post 20c.

**Miniature volume controls**  
As used in Jap radios etc, supplied with knob and including switch, nominally 5K-10K ohms. VC-1, 16mm diam., 60c; VC-2, 16mm diam. with mounting posts, 70c; VC-3, 12mm diam. sub-miniature, 70c.

#### Popular speakers

2 1/4", 25 ohms \$1.00  
5", 4, 8 ohms \$4.50  
6" x 4", 4, 15 ohms \$4.50  
7" x 5", 4, 8 ohms \$5.50  
9" x 6", 4 ohms \$6.50

#### Rotary switches

MSP "OAK" wafer switches. Post 35c each.  
3 Pole, 4 pos. \$1.95  
4 Pole, 2 pos. \$1.95  
4 Pole, 3 pos. \$1.95  
6 Pole, 2 pos. \$1.95  
6 Pole, 3 pos. \$2.90  
8 Pole, 2 pos. \$2.90  
12 Pole, 2 pos. \$2.90  
3 Pole, 11 pos. \$3.90  
6 Pole, 4 pos. \$3.90  
9 Pole, 3 pos. \$3.90  
24 Pole, 2 pos. \$3.90

#### Battery carriers

P/No.	Type	Price
900	UM3x2	40c
902/4	UM3x4	50c
906/8	UM3x6	85c
909	UM3x8	\$1.10
910	UM2x1	50c
912	UM2x2	75c
914/6	UM2x4	\$1.00
918	UM1x1	60c
920	UM1x2	90c
922/4	UM1x4	\$1.85
BS-2	9V Clip	15c

### E.T.I. ELECTRONIC EXPERIMENTERS WORKSHOP,

We supply individual or complete kits of parts for the Home Workshop, April issue page 44. Only top brand, quality components are supplied as in the published lists. Tools \$21, Hardware \$33, Resistors \$16.50, Capacitors \$19, Trimpots \$2.50, Potentiometers \$3.50, Relays/switches \$5, Semiconductors \$20. Post \$2.00 each kit.



**COMPLETE KIT only \$115 P & P \$3.00**

**plus FREE "25 TOP PROJECTS" BOOK (ETI)**

An ideal manual of beginners projects etc.

### ACE P.C. BOARDS for Experimenters.

170 x 85mm 4mm spacing **\$1.50**

Latest ready-to-use board for "Instant" circuits. Pre-drilled and designed with 100 connection points each with 4 holes spaced 4mm apart.

### WIRES AND CABLES

Speaker wire	12c m
Single shielded	20c m
Twin shielded	33c m
4 core shielded	55c m
50 ohm coax	55c m
75 ohm coax	55c m
75 ohm (colour TV)	55c m
300 ohm TV ribbon	14c m
Hook-up wire	7c m
Fig. 8 mains	16c m
3 core mains	28c m
8 core low voltage	40c m

### P.C.B. KIT

PAK 47 **\$2.50** P & P 50c

Our very popular kit for building your own P.C. boards. Includes Dalo Etch Pen, etchant and P.C. Boards, with instructions.

### D.I.L. BREADBOARD KIT

New 180 x 120 mm fibreglass board with 10, 16 pin I.C. sockets, 721 pins and 75 coloured "jumper" leads. For digital designing - eliminates soldering to components.

Board only **\$6.50**



### General Purpose EXPERIMENTERS BREADBOARD



Suits all types of components - no soldering required. EL Instruments SK10 Board has over 500 long-life contacts in 165 x 55mm area.


#### MINI-BREADBOARD

As above but 80 contacts in smaller area. For simple circuits only.

**\$29** P & P \$1

**\$3.75** P & P 50c

### Experimenters Boxes



We have a wide selection of plastic and metal cabinets and boxes to house your projects. See part of the range below.

#### MINI-BOXES Aluminium finish.

AMB2 70 x 60 x 41mm	... \$1.20
AMB3 82 x 60 x 38mm	... \$1.50
AMB4 82 x 60 x 42mm	... \$1.50
AMB5 100 x 50 x 70mm	... \$1.50
AMB6 100 x 57 x 41mm	... \$1.45
AMB7 100 x 57 x 57mm	... \$1.50
AMB8 108 x 60 x 38mm	... \$1.50
AMB9 128 x 57 x 57mm	... \$1.60
AMB10 128 x 100 x 76mm	... \$1.85
AMB12 146 x 114 x 90mm	... \$2.45
AMB14 178 x 153 x 114mm	... \$3.30

#### MINI-BOXES - Vinyl covered

Aluminium	
AMB21 102 x 70 x 102mm	... \$3.50
AMB22 83 x 41 x 57mm	... \$1.75
AMB23 70 x 41 x 60mm	... \$2.63
AMB24 102 x 57 x 57mm	... \$3.50
AMB25 133 x 57 x 76mm	... \$3.50
AMB26 152 x 178 x 114mm	... \$5.25
AMB27 133 x 159 x 102mm	... \$5.25

### Heat conducting compound

Thermopath 167 silicon heatsink joint compound for mounting power transistors etc.

**99c p & p 30c**

### Electrical insulating compound

Gensil 21A is an excellent silicon grease for use in all electrical/electronic applications. 12 oz. tube.

**\$1.40 P & P 30c**

### Nut and bolt packs


No. 129 - 60 self-tapping screw assortment, various sizes and gauges \$1.50. No. 130 - 120 steel washers, various sizes and hole gauges \$1.50. No. 131 - 120 - high grade nut assortment \$1.50. No. 132 - 100 screw assortment incl. countersunk, round head, hex. etc. \$1.50. No. 8 - 200 assorted screws, nuts, washers etc. Ideal for hobbyists \$1.50. P & P on above packs, 40c ea.

### Transistor and I.C. sockets

3 Pin	... 25c
4 Pin	... 30c
8 Pin DIL	... 50c
8 Pin TO-5	... 70c
10 Pin TO-5	... 90c
14 Pin DIL	... 55c
16 Pin DIL	... 60c
18 Pin DIL	... 85c

### Handy, all purpose MULTIMETER

A quality, guaranteed multimeter for the beginner or service engineer. 20K ohms/volt DC, 10K ohms/volt AC. DCV: 5, 25, 50, 250, 500, 2.5KV; ACV: 10, 50, 100, 500, 1000; DC current: 500µA, 2.5mA, 250mA; Ohms: 0-6K, 0-600K; Decibels: -20 to +22dB; Capacitance: 500pF to .1mfd; only \$14.50, Pack and post 75c.



### Cheap TRANSISTOR TESTER

- Checks transistors for forward and reverse leakage.
- Check NPN and PNP.
- Ideal for beginners - use with multimeter.

Sale price \$5.50, post and pact 75c.

You'll find Beginners World at -

### PRE-PAK ELECTRONICS

**SYDNEY:**  
718 Parramatta Road, CROYDON, N.S.W. 2132. P.O. Box 43, CROYDON. 2132. Phone: 797-6144.  
**NEWCASTLE:**  
Shops 3-6, West End Arcade, 810 Hunter St., WEST NEWCASTLE. 2300. Phone: 69-2103.

- WOLLONGONG, N.S.W. Ph: 84-9034. Hi-Tec Electronics, 265 Princes Highway, CORRIMAL. 2518.
- HUNTER VALLEY, N.S.W. Ph: 33-6664 Hunter Valley Electronics, 478 High St., Maitland. 2320.

- ADELAIDE. Ph: 255-2249 A.E. Cooling, 6 Trimmer Road, Elizabeth South. 5112.
- MELBOURNE. Ph: 211-4788 Flight Electronics, 1 Derby Road, Caulfield East. 3145.
- BRISBANE. Ph: 97-2509. Delsound, 103 Cavendish Road, Coorparoo. 4151.
- NORTH QUEENSLAND. Ph: 78-855. Philtronic, Cnr. Grendon & Palmer Sts., North Mackay. 4740.
- WEST AUSTRALIA. Ph: 41-3427. B.P. Electronics, 192 Stirling Terrace, Albany. 6330.
- CANBERRA. Ph: 47-6179. Electronics Shop, 2 Hackett Place, Hackett. 2602.

**NOW OPEN**  
NEW SYDNEY CITY STORE  
**432 KENT ST.**  
SYDNEY 50 YDS FROM KENT HI-FI



# Circuit & Design Ideas

Conducted by Ian Pogson

Interesting circuit ideas and design notes selected from technical literature, reader contributions and staff jottings. As they have not necessarily been tested in our laboratory, responsibility cannot be accepted. Your contributions are welcome, and will be paid for if used.


## An unusual regulated power supply

Using only a 3-terminal regulator, one operational amplifier, and two resistors, this circuit can supply up to 1 amp voltages between about 7V and 33V.

The operational amplifier is used to hold the common terminal of the regulator at a fixed voltage, as determined by the ratio of the two resistors. The output voltage is then 5V more than this reference voltage. A circuit analysis shows that the output voltage is given by  $5(R1 + R2)/R1$ .

The maximum output voltage is determined by the maximum allowable input voltage. For the devices specified, this is 35V, so with a minimum drop across the regulator of 2V, the maximum output voltage obtainable is about 33V.

The minimum output voltage is determined by the capabilities of the op-amp. With the type specified, voltages down

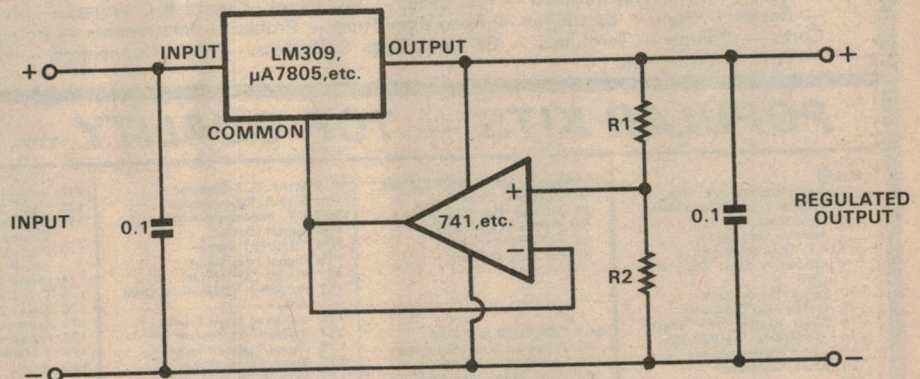

to about 7V can be achieved. The line and load regulation will be the same as would normally be achieved with the 3-terminal regulator alone.

If a variable supply is required, then the

resistors can be replaced by a potentiometer. The 0.1μF capacitors shown across the input and output may be necessary to ensure stability.

(By David Edwards, E-A staff.)

## Wow and flutter tests

Rather specialised equipment is needed to measure wow and flutter and listening tests are quite subjective, as it is not easy to distinguish between small amplitude and frequency variations. The following tests with relatively simple equipment give useful results, particularly for comparison purposes.

(a) If you have a professionally made test tape with sinewave tones, select a track of about 1kHz. Feed an output from the recorder (playback) into the vertical input of a CRO. Into the horizontal input feed an audio signal generator having good frequency stability and set the frequency to 1kHz to produce an almost stationary 1:1 Lissajous pattern, in this case varying from a diagonal line to a circle. Wow will cause the pattern to

oscillate slowly through various phase angles, and flutter will produce rapid overlapping ellipses. The higher the frequency of the two inputs to the CRO, the more sensitive the test will be, limited only by the stability of the audio oscillator and the quality of the test tape.

(b) If a professional test tape is not available, make a recording from the oscillator using a good quality cassette (just rewound), and proceed as before. In this case the observed wow and flutter will be the algebraic sum of the variations during record and playback, reaching twice the value obtained by method (a). If wow is due to friction in the cassette it may be partly cancelled. A square wave recording also produces an easily interpreted pattern, but use a sinewave

on the horizontal input.

(c) Another version of this test is simply to view the output wave on the CRO with the normal timebase free running (without sync). Assuming the timebase frequency is stable (not necessarily the case) and having set the fine frequency control for a stationary pattern of a few waves, any frequency variations cause the pattern to drift, the direction of movement indicating the direction of frequency shift. Again, the higher the frequency used the more sensitive the test, as it is phase change we observe which is related to frequency change, not percentage frequency change as detected by the ear.

(By Mr P. H. Mathieson, M.I.E. Aust., Box 115, Kathmandu, Nepal.)

## Method of measuring amplifier distortion

Most audio amplifiers have negligible phase shift over a reasonably wide frequency range. By using a nulling technique as described below, it is possible to make distortion measurements quite simply within this range.

The two circuits show how the distortion of inverting and non-inverting

amplifiers may be measured using only a signal generator, some resistors and an AC RMS voltmeter. For non-inverting amplifiers a signal generator with a floating output, or an isolating transformer, is required. The resistor should be selected as follows:

$R2/R3 = V_s/V_o$ , with  $R2 + R3 = 10k$

to 100k

where  $V_s$  = maximum signal generator output for inverting amplifier arrangement and  $\frac{1}{2} \times$  maximum output voltage for non-inverting arrangement.

$V_o$  = maximum desired amplifier output



# E.D.&E. (SALES) PTY. LTD.

## EDUC-8 COMPUTER—COMPLETE KIT

(OCT-NOV-DEC 1974)

**\$368.75 (Plus Tax)**

OR INDIVIDUAL COMPONENTS  
AS REQUIRED

K  
I  
T  
S

K  
I  
T  
S

### MAJOR STOCKISTS OF ALL GENERAL RADIO & ELECTRONIC COMPONENT PARTS — YOU NAME IT — WE WILL QUOTE

Valves — Transistors — Zener & Power Diodes — Semi-Conductors — Diacs — Triacs — S.C.R.'s — I/C's. Speakers — Microphones — Coils — IFT's. Transformers — Inst Cases — Metalwork. Players & Changers — Meters — Relays — Condensers — Resistors — Bezels — Styli — Cartridges — Recording Tape — Probes — Instruments — Potentiometers — Crystals — Ferrite Beads — Cores — Baluns — Terminals — Co-Axial Plugs & Sockets — Multi Connectors — Printed Circuit Boards — Copper Winding — Wire — Etc. — Etc.

### POPULAR KITS — TOP QUALITY — LOWEST PRICES

#### AUDIO

- 1 Direct Reading A.F. Gen.
- 2 SQ Wave Gen-10Hz-1MHz.
- 3 Solid State A.F. Gen.
- 4 Additive Freq Meter.
- 5 A.F. Tone Burst Gen.
- 6 Laboratory Solid State A.F. Gen.
- 7 Scaler/Divider Unit.
- 8 Crystal Freq Calibrator.
- 9 Direct Reading A.F. Meter (0-200KHz — 10MV-2V).
- 10 High Performance A.F. Gen.
- 11 White Noise Gen.
- 12 —
- 13 —
- 14 —

#### AUTOMOTIVE UNITS

- 15 Tacho & Dwell Angle for Service Stations.
- 16 Dwell Extender Unit.
- 17 Solid State — CDI.
- 18 All Electronic Ignition System.
- 19 Windscreen Vari-Wiper.
- 20 Tacho & Dwell Unit.
- 21 Brake Light Warning.
- 22 Emergency Flasher.
- 23 High Efficiency Flasher.
- 24 Solid State Volt Reg.
- 25 Car Theft Alarm System.
- 26 Ignition Analyser & Tachometer Unit.
- 27 Strobe Adaptor for Ignition Analyser.
- 28 Car Burglar Alarm.
- 29 1975 C.D.I Unit

#### BATTERY CHARGERS

- 30 6 Volt — 1 Amp.
- 31 12 Volt — 1 Amp.
- 32 Automatic H/Duty.
- 33 1-14 Volt — 4 Amp.
- 34 1973 Automatic Unit.
- 35 Constant Current Unit.
- 36 —
- 37 —

#### CONVERTERS — INVERTERS

- 38 12 VDC 300/600V 100W.
- 39 12 VDC 240 VAC 20W.
- 40 12 VDC 240 VAC 50W.
- 41 24 VDC 300 VDC 140W.
- 42 24 VDC 800 VDC 160W.
- 43 —
- 44 —

#### C.R.O. UNITS

- 45 1963 3" Calibrated.
- 46 1966 3" C.R.O.
- 47 1968 3" Audio C.R.O.
- 48 C.R.O. Electronic Switch.
- 49 C.R.O. Wideband P/Amp.
- 50 C.R.O. Calibrator.
- 51 —
- 52 —

#### INTRUDER WARNING SYSTEM

- 53 Electronic Thief Trap.
- 54 Infrared Alarm System.
- 55 Simple Burglar Alarm.
- 56 Light Beam Relay.
- 57 Car Burglar Alarm.

#### MULTIMETERS & V.O.M.

- 58 Protected D.C. Multimeter.
- 59 Meterless Voltmeter.
- 60 Wide Range Voltmeter.
- 61 F.E.T. D.C.
- 62 1966 V.T.V.M.
- 63 1968 Solid State V.O.M.
- 64 1973 Digital V.O.M. (1).
- 65 1973 Digital V.O.M. (2).
- 66 High Linearity A.C. Millivolt-meter.

#### PHOTOGRAPHIC UNITS

- 69 50 Day Delay Timer.
- 70 Regulated Enlarger Line.
- 71 Slave Flash Unit.
- 72 Sound Triggered Flash.
- 73 Solid State Timer.
- 74 Auto Trigger For Time Lapse Movies.
- 75 —
- 76 —

#### REGULATED POWER SUPPLIES

- 77 Laboratory Type 30/1 Unit.
- 78 Laboratory Type Dual Power Supply.
- 79 Serviceman's Power Supply.
- 80 Solid State H.V. Unit.
- 81 IC Variable Supply Unit.
- 82 1972IC Unit (E/T)
- 83 Simple 5V 1A Unit.
- 84 Simple 3-6V 3.5A Unit.
- 85 S/C Proof 0.30 VDC at 1A.
- 86 Reg 0-30VDC at 3A O/L Protected.
- 87 Variable Reg 12V-0.5A.
- 88 Reg O/Load & S/C Protection 60 VDC at 2A (1973) — EA.
- 89 —
- 90 —

#### R.F. INSTRUMENTS

- 91 Solid State Test Osc.
- 92 Signal Injector & R/C Bridge.
- 93 Solid State Dip Osc.
- 94 "Q" Meter.
- 95 Laser Unit.
- 96 Digital Freq Meter 200KHz.
- 97 Digital Freq Meter 70MHz.
- 98 IF Alignment Osc.
- 99 27MHz Field Strength Meter.
- 100 100KHz Crystal Cal.
- 101 1MHz Crystal Cal.
- 102 Solid State Dip Osc.
- 103 V.H.F. Dip Osc.
- 104 V.H.F. Powermatch.

- 105 V.H.F. F/S Detector.
- 106 S.W.R. Reflectometer.
- 107 R.F. Impedance Bridge.
- 108 Signal Injector.
- 109 1972 FET Dipper.
- 110 Digital Freq Meter.
- 111 Simple Logic Probe.
- 112 Frequency Counter & DVM Adaptor.
- 113 Improved Logic Probe.
- 114 Digital Logic Trainer.
- 115 Digital Scaler/Preamp.
- 116 Digital Pulser Probe.
- 117 Antenna Noise Bridge.
- 118 Solid State Signal Tracer.
- 119 1973 Signal Injector.
- 120 Silicon Diode Sweep Gen.

#### TRAIN CONTROL UNITS

- 124 Model Control 1967.
- 125 Model Control with Simulated Inertia.
- 126 Hi-Power unit 1968.
- 127 Power Supply Unit.
- 128 SCR-PUT Unit 1971.
- 129 SCR-PUT Unit with Simulated Inertia 1971.
- 130 Electronic Steam Whistle.
- 131 Electronic Chuffer.

#### TV INSTRUMENTS

- 134 Silicon Diode Sweep Gen.
- 135 Silicon Diode Noise Gen.
- 136 Transistor Pattern Gen.
- 137 TV Synchroniser & Pattern Gen.
- 138 Cross Hatch & Bar-Gen

#### VOLTAGE CURRENT CONTROL UNITS

- 142 Auto Light Control.
- 143 Bright/Dim Unit 1971.
- 144 S.C.R. Speed Controller.
- 145 Fluorescent Light Dimmer.
- 146 Autodim-Triac 6 Amp.
- 147 Vari-Light 1973.
- 148 Stage, etc. Autodimmer 2KW.
- 149 Auto Dimmer 4 & 6KW.

#### RECEIVERS—TRANSMITTERS—CONVERTERS

- 153 3 Band 2 Valve.
- 154 3 Band 3 Valve.
- 155 1967 All Wave 2.
- 156 1967 All Wave 3.
- 157 1967 All Wave 4.
- 158 1967 All Wave 5.
- 159 1967 All Wave 6.
- 160 1967 All Wave 7.
- 161 Solid State FET 3 B/C.
- 162 Solid State FET 3 S/W.
- 163 240 Communications RX.
- 164 27 MHz Radio Control RX.
- 165 All Wave IC2.
- 166 Fremodyne 4-1970.
- 167 Fremodyne 4-1970.
- 168 110 Communications RX.
- 169 110 Communications RX.

- 170 3 Band Preselector.
- 171 Radio Control Line RX.
- 172 Deltahet MK2 Solid State Communications RX.
- 173 Interstate 1 Transistor Receiver.
- 174 Crystal Locked H.F. RX.
- 175 E/A 130 Receiver.
- 176 E.A. 138 Tuner/Receiver.
- 177 Ferranti IC Receiver.
- 178 Ferranti IC Rec/Amp.
- 179 7 Transistor Rec.
- 180 —
- 181 —

#### TRANSMITTERS

- 182 52MHz AM.
- 183 52MHz Handset.
- 184 144MHz Handset.

#### CONVERTERS

- 187 MOSFET 52MHz.
- 188 2-6MHz.
- 189 6-19 MHz.
- 190 V.H.F.
- 191 Crystal Locked HF & VHF.

#### AMPLIFIERS PREAMPS & CONTROL UNITS MONAURAL.

- 194 Mullard 3-3.
- 195 Modular 5-10 & 25 Watt.

#### STEREO

- 196 1972 PM 129 3 Watt.
- 197 Philips Twin 10-10W.
- 198 PM 10 + 10W.
- 199 PM 128-1970.
- 200 PM 132-1971.
- 201 ETI-425 Amp & Preamp.
- 202 ETI-425 Complete System.
- 203 ETI-416 Amp.
- 204 PM 136 Amp 1972.
- 205 PM 137 Amp 1973.
- 205A PM 143

#### GUITAR UNITS

- 209 P/M 125 50W.
- 210 E/T 100 100W.
- 211 P/M 134 21W.
- 212 P/M 138 20W.
- 213 Modular 200W.
- 214 Reverb Unit.
- 215 Waa-Waa Unit.
- 216 Fuzz Box.
- 217 Sustain Unit

#### PUBLIC ADDRESS UNITS

- 219 Loud Hailer Unit.
- 220 P.A. Amp & Mixer.
- 221 P/M 135 12W.
- 222 Modular 25W.
- 223 Modular 50W.

#### CONTROL UNITS

- 225 P/M 112.
- 226 P/M 120.
- 227 P/M 127.

#### MIXER UNITS

- 229 FET 4 Channel.
- 230 ETI Master Mixer.
- 231 Simple 3 Channel.

#### TUNER UNITS

- 232 P/M 122.
- 233 P/M 123.
- 234 P/M 138.
- 235 Simple B/C.
- 236 PM 146 AM-FM

#### PREAMPLIFIERS

- 237 Silicon Mono.
- 238 Silicon Stereo.
- 239 FET Mono.
- 240 Dynamic Mic Mono.
- 241 Dynamic Mic Stereo.
- 242 P/M 115 Stereo.
- 243 —

#### MISCELLANEOUS KITS



- 244 Geiger Counter.
- 245 Direct Reading Impedance Meter.
- 246 —
- 247 Electronic Anemometer.
- 248 Simple Proximity Alarm.
- 249 Pipe & Wiring Locator.
- 250 Resonance Meter.
- 251 Electric Fence.
- 252 Metronome Ace Beat.
- 253 Transistor Test Set.
- 254 Electronic Thermometer.
- 255 Flasher Unit.
- 256 Lie Detector.
- 257 Metal Locator.
- 258 Stroboscope Unit.
- 259 Electronic Canary.
- 260 240V Lamp Flasher.
- 261 Electronic Siren.
- 262 Probe Capacitance Meter.
- 263 Moisture Alarm.
- 264 AC Line Filter.
- 265 Proximity Switch.
- 266 Silicon Probe Electronic Thermometer.
- 267 Transistor/FET Tester.
- 268 Touch Alarm.
- 269 Intercom Unit.
- 270 Light Operated Switch.
- 271 Audio/Visual Metronome.
- 272 Capacitance Leakage.
- 273 Audio Continuity Checker.
- 274 Bongo Drums.
- 275 Simple Metal Locator.
- 276 Keyless Organ.
- 277 Musicolour.
- 278 Stereo H/Phone Adaptor.
- 279 Attack Decay Unit.
- 280 Tape Recorder Vox Relay.
- 281 Tape Slide Synchroniser.
- 282 Tape Actuated Relay.
- 283 Auto Drums.
- 284 IC Vol Compressor.
- 285 Audio Attenuator.
- 286 Thermocouple Meter.
- 287 Door Monitor.
- 288 Earth "R" Meter.
- 289 Shorted Turns Tester.
- 290 Zenor Diode Tester.
- 291 Morse Code Osc.
- 292 Simple Electronic Organ.
- 293 Pollution & Gas Analyser.
- 294 Universal H/Phone Adaptor.
- 295 Super Stereo ETI 410.
- 296 "Q" Multiplier.
- 297 Optomix

PHONE  
662-3506

**E. D. & E. (SALES) PTY. LTD.**  
118 LONSDALE STREET, MELBOURNE — 3000 — VIC.

PHONE  
662-3506



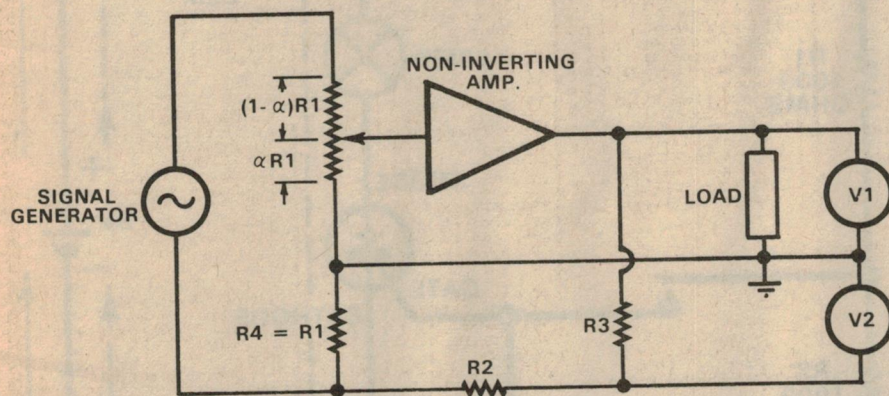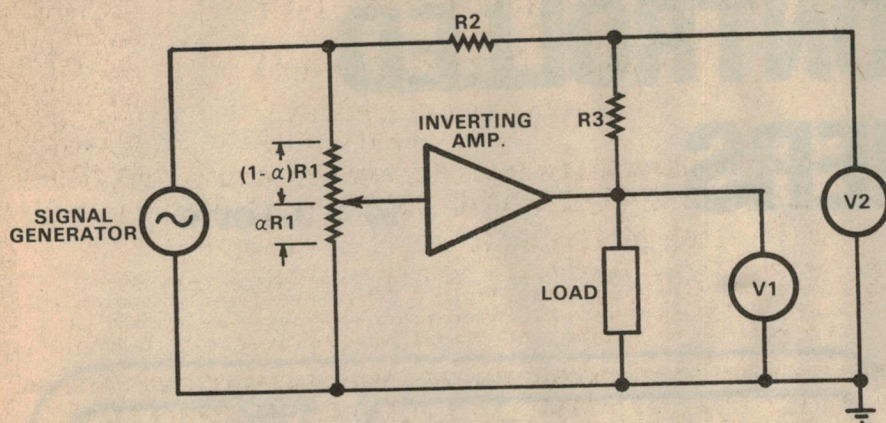


### Additional dividers for VNG reference

Referring to Electronics Australia April, 1975, "Frequency Reference Derived from VNG", this additional circuit was used to adapt the output of the derived reference to provide 1MHz, 100kHz. — — —, 1Hz, as well as the 3MHz and 1.5MHz available. The 7492 divides the crystal frequency by six to provide 1MHz

which is then divided by ten by a 7490 to give 100kHz. Further 7490s are used to divide down to 1Hz. All outputs are buffered by 7437 quad NAND buffers.

(By Ross Dannecker, Electrical Engineering Dept, University of Qld, St. Lucia, Qld 4067.)

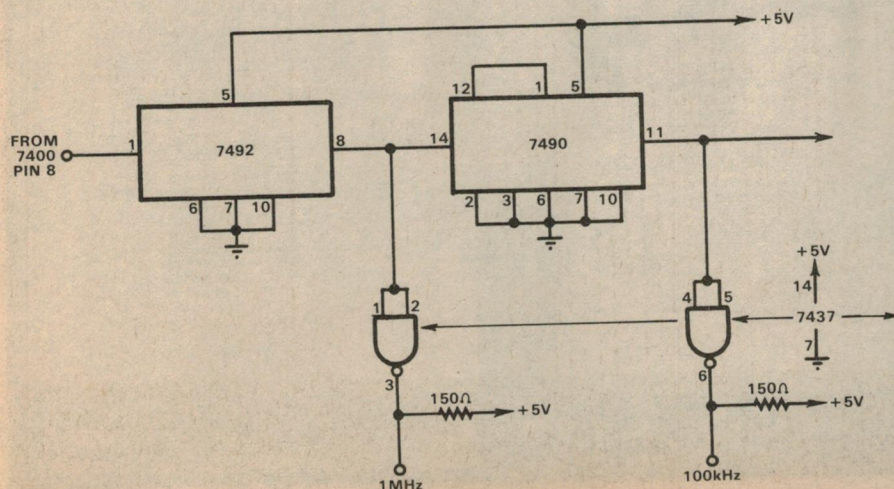

voltage

$R1 \approx 1k$

$$\alpha \approx R3/R2 \times \text{amplifier voltage gain}$$

To make a measurement, set the signal generator output to give the required amplifier output voltage ( $V_1$ ). Then adjust the signal generator frequency and  $\alpha$  alternately until a minimum value of  $V_2$  is obtained. The distortion can then be calculated from:

% distortion  $\approx$

$$\frac{V_2}{V_1} \cdot \frac{R_2 \cdot R_{in} + R_3 \cdot R_2 + R_3 \cdot R_{in}}{R_2 \cdot R_{in}} \cdot 100$$

where,  $R_{in}$  = input impedance of device used to measure  $V_2$

If an oscilloscope is used to measure V<sub>2</sub>, the nature of the distortion can be identified. Since a differencing technique is used, distortion levels within limits, below the distortion of the signal generator can be measured. It should be noted that this method is not suitable for amplifiers with frequency dependent gain like RIAA preamplifiers.

(By Mr N. Pollock, 126 Abbott Street, Sandringham, Vic. 3191.)

## PROJECTS & CIRCUITS

One of the latest additions to our handbook series, "Projects & Circuits" is just that—constructional projects and circuit ideas which we have reprinted from the pages of Electronics Australia. There are more than thirty full constructional projects, plus a number of simple circuits & tips. An ideal companion to Basic Electronics.

**\$2.00 plus 60c p & p**

# RADIO DESPATCH SERVICE

**869 GEORGE STREET  
SYDNEY**

**CNR GEORGE & HARRIS STS  
RAILWAY SQUARE  
TEL 211-0816, 211-0191**

## TEST EQUIPMENT

CT500	20kOhms/V	VOM	\$17.64
MVA100	100kOhms/V	VOM	\$39.00
MVA1	1kOhms/V	VOM	\$9.78
MVA80	80kOhms/V	VOM	\$23.00
Y82GND	50kOhms/V	VOM	\$25.21
360TR	TRANSISTOR TESTER		
	AND VOM		\$39.50
360FET	FET/VOM		\$47.61
TV7001	FET/VOM		\$60.08
TR10	DIGITAL VOM		\$132.25

**OPEN SATURDAY MORNINGS**



# SILICON CONTROLLED RECTIFIERS

by A. J. LOWE

This Teach Yourself Board introduces the thyristor or, to be more exact, one of the thyristor family known as a silicon controlled rectifier. (SCR). This board was made to show that an SCR functions as a switch which is easily turned on, but not so easily turned off.

The layout of the board is shown in the photograph. It was built on a standard wooden chassis as described in part one of this series.

The circuit diagram is shown in Fig. 1. The arrows on the lines showing current flow indicate the direction in which current is conventionally said to flow—out of the positive terminal of the battery and in at the negative terminal. The arrows are therefore pointing in the direction opposite to the direction of electron flow.

The wired model was laid out, as can be seen, with components placed in the same relative positions shown in the circuit diagram.

The "switch in the gate circuit of the SCR was simply a strip of brass soldered at one end to the nail between resistors R1 and R2. It acts as a push button when pressed against the nail below its free end. The battery, comprising two AA cells, was held on the board with an aluminium clip.

The prototype used a G.E. C6A SCR which will carry 1.6 amps and block 100 volts; it is therefore overrated for its duty in this model. Almost any SCR which will carry half an amp would do instead, but the terminal pins would have to be arranged to suit. However, it is important to select an SCR which can be turned on with less than three volts. The C106Y1, available at \$1, has high gate sensitivity and is a suitable alternative to the original used.

If any trouble is experienced with turning on the SCR, the value of R1 should be reduced so that the voltage applied to the gate is increased.

## PARTS LIST

- 3 1000 ohm resistors ¼ watt
- 1 torch bulb for 2 cell torch
- 1 silicon controlled rectifier C6A, C106Y1, or similar
- 2 AA cells
- 1 crocodile clip, brass, aluminium, nails etc


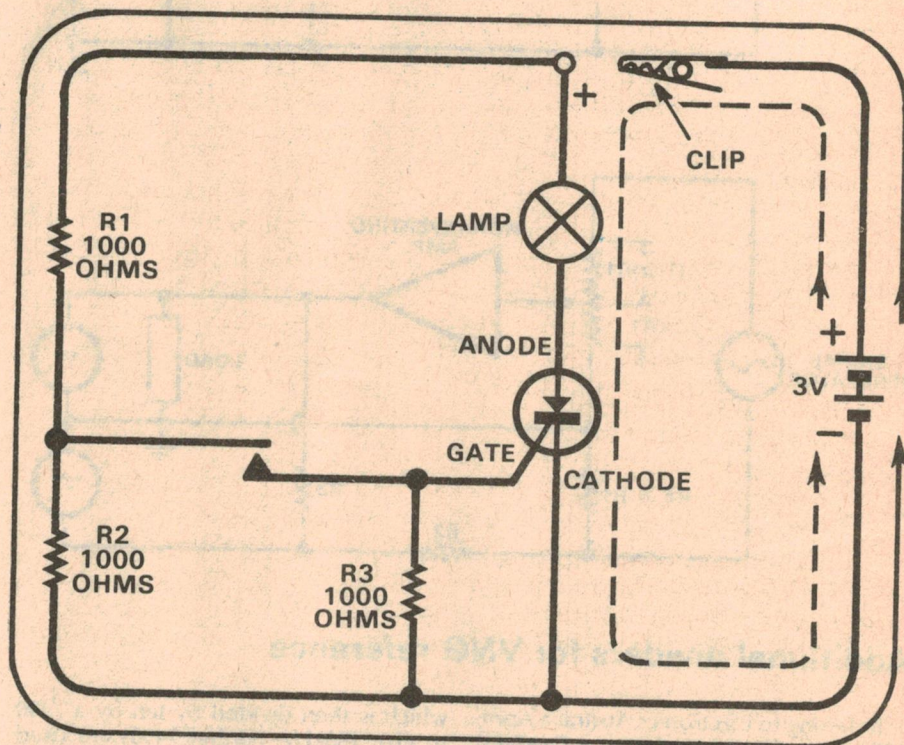


FIG. 1



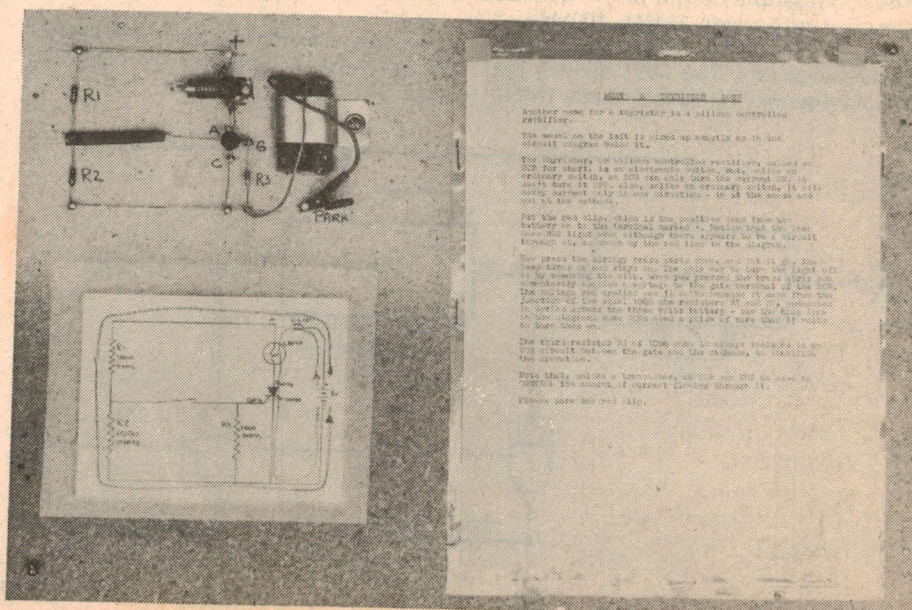

# WHAT AN SCR DOES

The SCR (silicon controlled rectifier) is one of several members of the thyristor family, and probably the best known one. The (SCR) is an electronic switch. But, unlike an ordinary switch, an SCR can only turn the current ON. It can't turn it off. Also, unlike an ordinary switch, it will carry current only in one direction—in at the anode and out at the cathode.

Put the red clip, which is the positive lead from the battery, on to the terminal marked +. Notice that the lamp does NOT light even though there appears to be a circuit through it, as shown by the dashed line in the diagram.

Now press the springy brass strip down, and let it go. The lamp turns on and stays on. The only way to turn the lamp off is by removing the clip. When you pressed the brass strip you momentarily applied a voltage to the gate terminal of the SCR. The voltage was 1.5 because it came from the junction of two equal 1000 ohm resistors R1 and R2, connected in series across the three volt battery—see the solid line in the diagram. Some SCRs need a pulse of more than 1.5 volts to turn them on.

The third resistor R3 of 1000 ohms is always included in an SCR circuit between gate and cathode, to stabilise the operation.

Note that, unlike a transistor, an SCR can NOT be used to CONTROL the amount of current flowing through it—at least not in the simple DC type circuit considered here.

Please park the red clip.

## FURTHER SUGGESTIONS

There are some further experiments which could be carried out by beginners who have a multimeter available.

(1) Measure the voltage between the anode and cathode of the SCR when the lamp is on. It will be about 0.8 volts.

(2) Now, unscrew the lamp from its holder (which turns the SCR off) and substitute resistors of various values (say 47 to 470 ohms) one at a time, in place of the lamp.

After each resistor has been connected, switch on the SCR using the springy brass strip, and measure the voltage between the anode and cathode of the SCR. Note that the voltage across the SCR stays fairly constant. The SCR does not follow Ohm's law.

In these experiments you have turned off the SCR by reducing the current flowing through it to zero—by removing the battery lead or by unscrewing the lamp. More precisely, the SCR is turned off by reducing the current through it until it reaches a critical value called the holding current.

You could experiment with this by substituting for the lamp a 10000 ohm potentiometer used as a variable resistor in series with a milliammeter. Set the variable resistor to about 500 ohms, and turn on the SCR. Read the current flowing through it. Now increase the resistance (be careful not to decrease or the milliammeter may be overloaded) and the current will drop.

At some critical value (the holding current), which may be between 0.5 and 5 milliamps, the current will suddenly drop to zero, and will not increase even though the resistance is decreased—because the SCR has been turned off.

On this board you have used what is, in effect, a push button switch to turn the SCR on. In many cases this may be inconvenient. In the next section we will look at a device which is often used to turn on an SCR, without a push button. It's called a unijunction transistor, and it can provide just the right sort of pulses needed to "trigger" or "fire" an SCR.

## printed circuit

- Accurately machine printed / etched.
- Phenolic & fibreglass-gold / tin plated.
- Special manufacturers' packs of 10.
- EA, R&H, ET, Philips, Mullard available.
- Specials to your drawing.
- Plus post 80c. Imm despatch.

75R7	3.00	ET601M	2.50	72IF6	2.20
75T19	2.00	ET601L	2.50	71A8	2.80
ET1500	2.00	ET422	3.30	72P3	2.20
ET1704	2.50	74S3	2.50	E8SRT	3.00
ET1117A-B	2.80	ET601J	3.00	75C19	2.00
ET1118	2.50	75T06	5.00	72R2	2.80
ET1120	2.00	75F55	2.00	72T2D	2.20
ET121	2.00	75T010	3.50	ET023	2.80
ET1433A-B	2.50	75C07	2.50	ET021	2.80
TM11	2.00	ET423	2.20	72T2ABC	4.40
75PC12	2.50	ET420E	3.30	73V18	3.30
75CL9	2.00	ET521B	2.00	73V1A	6.60
ET1122	2.80	ET601H	2.50	72SA1	3.30
ET1124	2.50	ET601G	2.80	ET022	2.80
ET1533A-B	2.50	74A1	2.20	71C12	4.40
ET1440	4.50	74HPL	2.00	ET019	2.80
ET1400	2.00	7312T	2.80	ET018	2.80
75W3	2.00	ET601D	2.20	ET017	2.80
ET1532	2.20	ET601C	2.80	ET014	2.80
ET1529B	3.30	ET420C	2.40	ET007	2.50
ET1529A	4.50	ET420D	2.40	71T12	3.30
ET1702	2.50	ET420B	2.80	ET011	2.00
ET601R	2.60	ET420A	2.20	71P8	2.80
ET601P	2.50	ET524	2.80	ET008	2.80
E8SRT	3.00	ET601B	3.30	72C2	3.90
75EM6	2.50	ET601N	3.90	ET012	2.20
75SD4	2.50	ET601F	2.80	72A6	2.50
75A01	2.50	ET601E	3.90	72PS6	2.20
ET414E	2.50	ET601A	3.30	ET006	2.80
ET414D2	3.20	73T011	2.80	ET034	2.90
ET430	2.00	73P11	2.80	71SA4C	3.30
ET314	2.00	ET520A	4.40	71SA4B	2.80
ET116	2.50	ET520B	4.40	71SA4A	2.80
E8S	3.00	73C12	4.90	ET025	2.80
E8K1	3.00	73BA9	2.80	71W7B	2.20
ET528	2.00	ET113	3.10	71W7A	2.20
ET312	3.00	ET419	2.20	ET003	2.80
75D1	2.50	ET218	3.50	71D3	4.00
74MX12D	3.50	ET417	1.70	ET005A	2.50
74MX12C	2.60	ET309	2.80	71T02	2.20
74MX12B	2.60	ET414D	1.30	70SL1	4.00
74MX12A	2.60	73T07	2.80	70PA1	4.00
ET701	2.50	73S6	1.30	70RD1	4.00
ET527	2.00	ET521	3.90	70T2	4.00
ET428	2.00	ET213	1.10	70F10	2.20
ET313	2.00	ET416	3.30	70A2	4.00
ET530	2.00	73D1	1.70	ET004	4.00
ET427	2.50	ET518	2.20	70CD1	2.20
ET426	2.00	733C	2.80	71R1	4.00
74MX8	2.00	73T1	2.80	70G7	2.00
74EM9	2.50	ET414A-B-C	2.80	70P6	4.00
74T08	2.50	72M12	2.80	71A8	2.50
ET429	2.20	72SA9M	2.80	70K6	4.00
EBX	5.00	ET413	2.80	70BF08	2.20
EB10T	5.00	ET034A	3.10	71D3	2.20
EBP	5.00	72S11	2.80	70TX1	6.00
EBM	5.00	72G7	2.80	70C4	6.00
EBD	5.00	72110	1.30	70C1	4.00
EBA	5.00	7211T	3.30	70P1	2.50
EBT	5.00	ET037-40	6.00	69C11	6.00
EBF	6.00	72SA10	3.10	69F10	2.50
EBG	6.00	72C8	2.80	70A1	2.50
74C9	4.20	ET029	2.20	69D10	6.00
7408	4.00	72S10	2.80	69C10	3.00
ET424	2.50	72R9	2.80	69P9	3.00
ET311	2.50	72SA9	2.80	69C9	6.00
ET526	2.50	ET033	3.30	69P5	3.00
ET114	2.50	72MX6	3.10	6810CL	6.00
ET6W	2.50	72T3	3.30	69S3	6.00
74SA5	4.00	ET026	2.80	69T5	4.00

## ALL SILICON 30/60w PA PORTABLE AMPLIFIER

6 1/2" W x 3 1/4" H x 8 1/2" D.  
12-16V, two inputs, 5 & 100mV. 15 ohm output. No. 763D. Also 125, 250, 500 ohm output No. 763A. All \$70 each. For 240V operation \$33 extra. Freight collect.



COILS and IF's 3/4" x 3/4" x 2" H. All \$2.50 ea. plus post 60c.

## RF CHOKES

Plus post 80c.  
381 AIR: 2.5mh 50ma—Pye 70c.  
381 IRON: 10uh to 1,000uh 25ma 70c.

## FILTERS

27: Line filter 2 amp \$12.  
29: Line filter 10/20 amp \$37.50.  
30: Pulse filter 2 amp \$12.

MAIL cheque or money order (add postage) direct to:—

**RCS radio pty ltd**  
651 FOREST RD BEXLEY  
NSW 2207 587 3491




# RADIOS FOR PEOPLE WHO

## 6 FULL BAND/8 SPLIT

Big performance features include: 2 hour on/off switch, RF gain switch, tuning meter, FM squelch control, 3" speaker and comprehensive circuit with each set. Bands 1,2,3,5,6, 7,8,9 and 10.

**\$59<sup>95</sup>**

7505/N

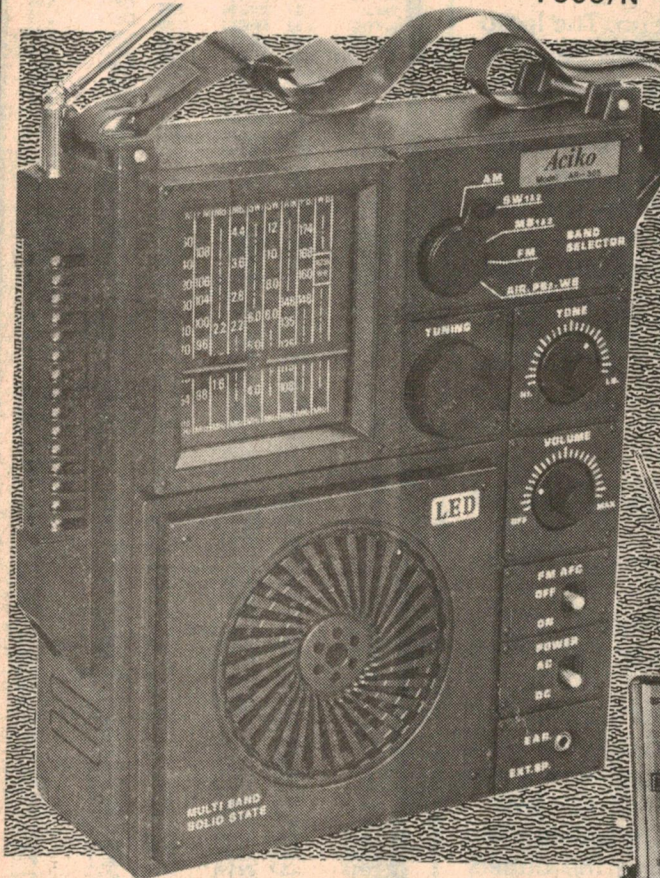

## 5 FULL BAND RADIO

AR505

**\$39<sup>95</sup>**

A powerful multi band with FM/AFC switch, LED tuning indicator, and tone control. AC/DC with bands 1,2,3, 7,8, and 9.

## 6 FULL BAND SOLID STATE RADIO

Listen to the world on this radio that has time zone dial, FM squelch control, fine tuning on short wave and push button band selection. 1 watt audio output on bands 1,2,3, 5,7,8 and 9.

**\$59<sup>95</sup>**

9W17




YOU'LL FIND ATLAS IN MELBOURNE AT CITY, FOOTSCRAY, DANDENONG, FRANKSTON, PRAHRAN, COBURG, BOX HILL, MOONEE PONDS, HAMPTON, CAMBERWELL, MALVERN & GEELONG. BULLEEN 211 9555

859/72



# WANT MORE FROM RADIO

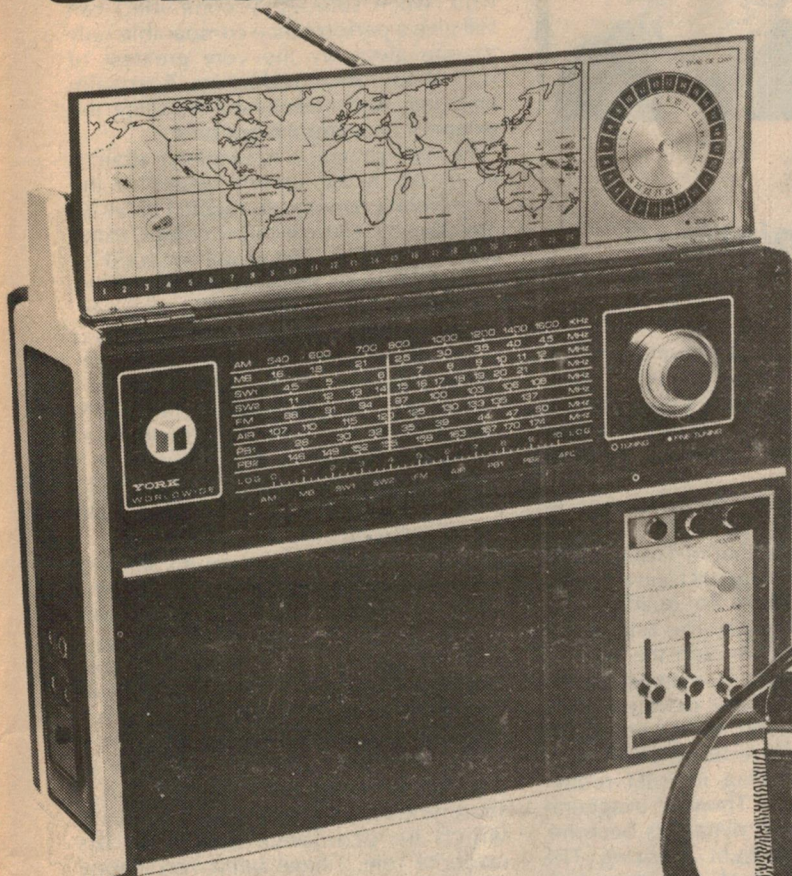

ATLAS HAVE THE RADIOS TO PUT THE WORLD AT YOUR FINGERTIPS! HEAR IT ALL AS IT HAPPENS... AND YOU'LL PAY A LOT LESS AT ATLAS!

## FEATURE PACKED 8 BAND RADIO

MB800

The big value unit just in at Atlas. 8 full bands that cover full short wave band 4 to 21 MHz. Fine tuning on all bands, FM squelch control. 800MW audio output with push button which can be used at any time covering 155 to 170 MHz with own fine tuner. 21 transistor and 19 diodes. AC/DC with bands 1,2,3, 4,5,7,8 and 9.

**\$119<sup>95</sup>**

## 4 BAND MULTI BAND TUNABLE TO 56-217 MHz

Smaller unit that brings in big reception on 4 bands, fully tunable 56 to 217 MHz. Complete with LED tuning indicator, AFC switch and operates on AC or DC. Bands 1,6,7,8,9 and 10.

1032

**\$44<sup>95</sup>**



## DETAILS OF FREQUENCIES ON MULTI BAND RADIOS

- |                                |              |               |
|--------------------------------|--------------|---------------|
| 1. AM 525 - 1650 KHZ           | 6. TV1       | 55 - 108 MHz  |
| 2. Marine Band 1.6 - 4.0 MHz   | 7. FM Music  | 88 - 108 MHz  |
| 3. Short wave 1.4.0 - 12.0 MHz | 8. FM Air    | 108 - 145 MHz |
| 4. Shortwave 2.12 - 21 MHz     | 9. FM Police | 145 - 174 MHz |
| 5. FM 30 - 50 MHz              | 10. TV2      | 174 - 217 MHz |

## POST NOW FOR FREE DELIVERY

TO 1236 GLENHUNTLY RD. GLENHUNTLY VIC.

NAME.....

ADDRESS.....

P/CODE.....

ENCLOSED CHEQUE  
FOR \$

POSTAL NOTE  
FOR RADIO

MONEY ORDER



# Classical Recordings

Reviewed by Julian Russell



## Orff, *Carmina Burana*: "disappointing"

**ORFF—Carmina Burana.** Cantata for voices and orchestra with Judith Blegen (soprano); Kenneth Riegek (tenor); and Peter Binder (baritone) and the Cleveland Orchestra and Chorus and Boys' Choir conducted by Michael Tilson Thomas. CBS Stereo SBR 235726.

This work has had an unusual history. When first generally heard just after the war it made a terrific impact on European and American musical circles where it was hailed as a masterpiece. Learned critics commented sagely—and to my mind correctly—on its elemental appeal. Much was made, too, of the bawdiness of the words, especially as most were of 13th century monkish origin. In other words it was the smash hit of the immediate post-war years. Since then it has declined in popularity and some critics, after a second look at the score, have had second thoughts about its value. Personally I still find a good occasional performance of the work an exciting experience. Alas, I cannot say the same about the performance under review. *Carmina*'s success lies in the physical impact of the forceful use of Orff's deliberately simple, steady rhythms which give the work its requisite earthy atmosphere. To alter this is to deprive it of much of its appeal. Yet, again and again Thomas does just this, going after cheap effects by increasing speed to chase mounting excitement, thereby sacrificing much of the primitive appeal.

His tempos, usually initially fast, gain wild momentum as the episode continues to scramble towards a hectic last few bars. I don't think many informed listeners would disagree with my statement that this was not Orff's intention at all. Regularity of beat with sharply accented rhythm's are essential if the work is not to acquire the alien atmosphere of the Bohemian Dance that opens the second act of Bizet's *Carmen*. And this distortion is all the more to be regretted because of the very high standard of the singing and playing.

Another point: The sleeve notes state, with some exuberance, that endless care was taken to produce a quadraphonic recording with the conductor—and I presume his audience—

surrounded by sound coming from all quarters. "Gift wrapped" Orff so to speak. And very gaudily wrapped, too. My pressing is in stereo and in terms of sound has its good and not so good features.

But even this aspect doesn't tempt me not to prefer many other recordings of *Carmina*, especially that of Fruebeck de Burgos for HMV, though it is now just on ten years old. Perhaps the quad version might titillate those who like listening to some of the music through the back of their necks but I cannot imagine it altering the fundamentally disappointing Thomas reading. The stereo version is spacious, if a little reverberant, with good separation but lacking in total refinement. And some of Thomas' exaggerations of tempos and dynamics become, after a while, downright annoying. The work is exciting enough as it should be played without these vulgar attempts to raise the audience's blood pressure by artificial means.

In my opinion the best feature of this issue is the picture on the sleeve of Hieronymus Bosch's *Garden of Delights* with its Playboy-like treatment of sex. And even this is spoiled by much of it disappearing under the poster-sized type in the title!

## Simon Boccanegra

**VERDI—Simon Boccanegra.** Complete revised opera. Piero Cappuccilli (Simon); Ruggero Raimondi (Fiesco); Gian Piero Mastromei (Albani); Maurizio Mazzieri (Pietro); Katia Ricciarelli (Maria); Placido Domingo (Adorno); RCA Chorus and Orchestra conducted by Gianandrea Gavazzeni. RCA Stereo ARL3 0564. (Three discs.)

When Verdi revised this opera some 25 years after its composition and added the great Council Chamber scene I wish he had, at the same time, reduced the length of the two final ones. True, anything that comes after the Council Chamber is something of an anticlimax but, even today, Simon still takes an "unconscionable time a'dying". But having said that I hasten to add that here is a very beautiful performance indeed, and it is also, for some reason or other, the first

recording of the opera to be issued in stereo. And this, despite the fact that you will find many unfamiliar names in the cast. Much of the credit for this splendid set must go to the conductor, Gavazzeni, who, when sufficiently committed can still give a performance comparable only to one given by the very greatest of Italian operatic conductors, Toscanini included. And there is no doubting the extent of his commitment here.

His interpretation is excitingly dramatic to which the superb quality of the engineering contributes much. Under his direction the score is full of colour, some of it very forceful but always imbued by typical Italian delight in the sheer exuberance of sound. Yet it is never coarse and, even at its most assertive just fierce. Only one of the principals tends to disappoint—Katia Ricciarelli, who is plainly out of her depth vocally and dramatically among her colleagues. Of these, all of them fine, I choose for reasons of space, Placido Domingo, Piero Cappuccilli, and Gian Piero Mastromei for special mention.

I still have the old HMV mono set with Gobbi, Christoff and de los Angeles, the sound of which still wears very well despite its age—it was issued 17 years ago and has long since been deleted from HMV's catalogue. Its conductor, Gabriele Santini, lacks Gavazzeni's sense of urgency. And in this set, too, there was one dud in the cast—tenor Campora as Adorno. Interestingly with this set is a short note on interpretation by Gobbi in which he proclaims Simon as his favourite role. I have been very happy with this set for many years and if it were still available would, all things considered—its age, its few faults and many beauties—be in a quandary as to which to recommend. But as things are, I plump unhesitatingly for the new set. You'll have to be very hard to please if you don't agree. Simon Boccanegra is a great opera, uneven perhaps but with sublime moments, its revisions pointing the way to Verdi at his most mature and innovative. It has recently been added to the repertoire of the Australian Opera.

★ ★ ★

**GRIEG—Lyric Pieces for Piano.** Played by Emil Gilels. DGG Stereo 2530 476.

These little pieces, 20 in all, are not to be confused with the composer's *Lyric Suite*, at one time very popular as *Palm Court* music. You might recognise an occasional one here and there but I, personally, heard many of them for the first time on this disc, and very charming I found them. I don't seem to be alone in this experience because Gilels himself, according to the sleeve notes, didn't hear about them until late in life. The pieces were composed at various stages of Grieg's creative career, from the very beginning to almost the end. In most cases their effect relies on their simplicity and this Gilels is careful to observe. And



while some might not be in complete agreement with his treatment of a few—a very few—he offers throughout a delicious example of piano playing.

I think it was Debussy who described Grieg's music as "snow wrapped in pink paper". A pity this, if it has put you off listening to some of these enchanting miniatures. The longest of them runs only three seconds over 4½ minutes. Many are less than two minutes long—or short, whichever way you'd like to put it. Try relaxing to this discful of delicious trifles. I did so and felt all the better for it. The piano tone is impressively faithful.

★ ★ ★

**SCHUBERT—String Quartet No. 14 in D Minor (Death and the Maiden). Quartettsatz (Nr. 12) in C Minor. The Melos Quartet of Stuttgart. DGG Stereo 2530 533.**

This is a highly personalised reading by the Melos Quartet of Stuttgart, not to be confused with the Melos Ensemble of London. Death and the Maiden will probably be too well known to readers for me to go into raptures over the delights it offers. As to the playing, some of the accenting in the first movement is rather heavier than one expects to hear in Schubert's chamber music. By the way, the recording is so forward that I found it necessary to turn my gain way down. At normal setting there is a glare on the sound and evidence of slight tonal roughness. And even at a lower level the dynamics are very wide for this type of work.

Throughout this quartet I had an uneasy feeling that the emotion here and there sounded a little forced, as if it were applied from the outside, not growing out from within. I mean that at times there is a little more Melos than Schubert. The players, all first class technically, seem sometimes to come between the composer and his music. In the second movement, which is part of the song from which the quartet takes its name, the opening is ever so slightly too jerky for my taste. But the resulting set of variations—and how easy they are to follow!—all go along admirably taking you with them.

This is not a performance to be dismissed lightly. The vividness of its presence will make many accept the reading as well as the players' idiosyncracies. The Scherzo is fine and the steadiness of the presto Finale excellent. This steadiness makes it sound faster than it really is and also makes for splendid definition.

It is an impressive example of players displaying brilliance of technique but without bragging about their virtuosity. I think you will find the very forward sound, mentioned above, very different from the rather euphemistic tone that for some time was characteristic of DGG's sound.

I must confess to having enjoyed the

fill, The Quartettsatz, better than the major work. The easy flow of tunes in this well-known piece was, to me, much more like the true Schubert. There is an altogether gentler and, in my opinion, more valid approach to the composer's style. A very beautiful performance.

★ ★ ★

**SCHUBERT—Symphony No. 3 in D Major. Symphony No. 4 in C Minor. Berlin Philharmonic Orchestra conducted by Karl Bohm. DGG Stereo 2530 526.**

I can guarantee that you will suffer no uneasiness about Bohm's approach to Schubert in these two early symphonies. Bohm—as always—lets the music speak for itself with the happiest of results. And if you have adjusted your gain to the quartet mentioned above you can restore it to normal for this disc. There is nothing cloying about the sweetness of Bohm's interpretation. It has of course, its more weighty moments but they, too, are always beautifully mannered. Knightly is perhaps the best way to describe these performances. The great Berlin Philharmonic is at its best, making everything sound so easy to bring off. And here there is no glare on the sound, which is right out of the top drawer. For instance, the Allegretto of the Third Symphony is really scented with its easy tempo reminiscent of a stroll through Vienna's Burggarten in Spring. I picked this movement as typical because the tyranny of space limitations prevent me from stressing individually the delights to be found in these two symphonies under Bohm's masterful direction. I can recommend the issue with the greatest enthusiasm. It might well be called attar of the younger Schubert.

★ ★ ★

**TCHAIKOVSKY—Serenade for Strings. GRIEG—Holberg Suite for Strings. Netherlands Chamber Orchestra conducted by David Zinman. Philips Stereo 6580 102.**

In 1965, while a guest of the Dutch Government at the Holland Music Festival, I heard David Zinman conduct the Netherlands Chamber Orchestra at the Concertgebouw in Amsterdam. His program consisted mostly of 18th century music and I was very impressed by his performance. He was then—and still is according to his photo on the record sleeve—a very personable young man obviously on the best of terms with his players. On my return to Australia I remember recommending him to the ABC for an Australian tour, though nothing came of it.

Zinman starts the first movement of the Tchaikovsky with fine attack and makes subtle changes of dynamics in the repeats of the theme. Later the faster parts of the music are all beautifully

articulated and phrased. Moreover the atmosphere is always echt-Tchaikovsky. All Zinman's work displays benevolent authority. He wins a fine, full string tone and the sound is first rate throughout the disc.

The well-known waltz that makes up the second movement is beguilingly played with considerable refinement. The following Elegy, though expressive, is never sentimentalised. And the same high standard prevails in the breezy Russian Finale.


Zinman firmly refuses to miniaturise Greig's music in the Holberg Suite on the reverse side, something that happens only too frequently even when performed under some of the most famous batons nowadays. The neat Prelude is followed by an elegantly phrased Sarabande. The Gavotte is discreetly accented without plodding over-emphasis. The Andante Religioso is reverent, but free from sickly piety. By that I mean it sounds closer to Bach than to Gounod. The concluding Rigadoun is as merry as all get out with the slower middle section supplying just the right contrast to the rest. This disc is strongly recommended to those with a liking for the lighter type of good music. And once again I recommend this brilliant young conductor, who shares the conducting of the Netherlands Chamber Orchestra with Simon Goldberg, to the notice of the ABC as a possibility for an Australian tour. I am sure he would be well liked. ②

# PHILIPS



**PHILIPS 12100/HP8  
GUITAR AND PA  
SPEAKER**

FREQ.  
RANGE:  
60Hz  
TO  
14kHz



● SEE & HEAR  
THE FULL RANGE  
OF DUTCH PHILIPS SPEAKERS

● TRADE ENQUIRIES WELCOME

## G.H.E.

**GEORGE HAWTHORN ELECTRONICS**

**966-968 High St., Armidale  
Victoria, 3143**

**Phone: 509 0374, 509 9725**





# Lighter Side

Reviews of other recordings

## Devotional Records

**SONGS FROM THE INNER COURT.** Pat Boone, with orchestra, organ and chorus. Stereo, Lamb and Lion LL-1016 (From Sacred Productions Aust, 181 Clarence St, Sydney and other capitals).

A phrase borrowed from the Inner Sanctuary of the traditional Jewish Temple, the title nevertheless describes a collection of traditional hymns which speak of the most intimate relationship between an individual christian and his God. The titles, all well known, will make the intention clear:

Just As I Am—I Can Hear My Saviour Calling — Into My Heart — He's The Saviour Of My Soul — I Am Thine O Lord — Have Thine Own Way, Lord — Does Jesus Care? — My Jesus, I Love You — More Love To Thee — Jesus, Saviour Pilot Me — Sun Of My Soul — Jesus, The Very Thought Of You — Fairest, Lord Jesus — I Need Thee Every Hour — A Sacrifice Of Praise.

Just before you set off to buy your copy, I think I should sound a word of caution. The arrangements, the recitative passages and the whole presentation is designed to emphasise the emotional aspect and, while this has been the clear intention, it will also heavily restrict the numbers of those who will enjoy the "tarry meeting" atmosphere. Definitely one that should be sampled personally before buying. (W.N.W.)

★ ★ ★

**THE KINGSMEN. 1686 Pounds Of Gospel.** Stereo, Canaan CAS-9754-LP. (From Sacred Productions Aust, 181 Clarence St, Sydney and other capitals.)

The featured title on track 1 "Hallelujah Square" sets a slow tempo which, if maintained, could have resulted in a rather dull record. But, fortunately, the remaining tracks on side 1 really get moving, with touches of C & W, jazz, gay 20's and some slick pickin' on amplified guitars: I'll Have A New Song—Get A Little Touch—I Can Hear Mama Singing—Who's Gonna Hold Your Hand—It's Enough To Make Me Shout.

Side 2 also starts with a slow number "He's Still Living" but the remainder are brighter although, to my ears, a bit heavy on the vocal gimmicks: Over The Next

Hill We'll Be Home—Jesus I Love You—Praise The Lord I'm Going Home—Glad Homecoming—I'm Trusting In Jesus.

The Kingsmen are a very skilled vocal and instrumental group and don't worry if the titles are unfamiliar—their diction is excellent. Apart from the two slower numbers: toe-tapping Gospel with voices ranging from the deepest bass to a tenor who could be mistaken, vocally, for a member of the fair sex! (W.N.W.)

## Instrumental, Vocal and Humour .....

**HEAVY ORGAN AT CARNEGIE HALL.** Virgil Fox; Spectacular Live Bach Concert. Vol. 2. Stereo, RCA, ARL 1-0477.

This is the second of two albums recorded in December 1973 by Virgil Fox in the Carnegie Hall, using the Rogers Touring Organ. Performed before a predominantly youth audience, and to the accompaniment of psychedelic lighting, the occasion seemed to generate the excitement of a pop concert, except that the music was that of Bach, and the artist a classical organist. If the audience applause anticipates the final bars of each item, it is for you to decide whether the enthusiasm is offensive or exhilarating.

Virgil Fox encourages the audience involvement with a spoken introduction to each item, presenting Bach as a man of fervour, a musical giant . . . "the red-blooded Bach".

To this remark one is compelled to add: a red-blooded performance also, on a red-blooded instrument! Maybe this is the smaller brother of the big Rogers which was permanently installed shortly afterwards in Carnegie Hall, but my tip is that you'll tend to forget its electronic soul as you listen to the ultimate sound. Electronic, acoustic? Merely the means to an end!

After all that, I'd better mention the track titles: We All Believe In One God—Rejoice Beloved Christians—Prelude & Fugue in E Minor—Toccata & Fugue in D Minor—Passacaglia & Fugue

**SOMETHING BEAUTIFUL. Vol. 2.** The Rick Powell Singers and the songs of Bill and Gloria Gaither. Stereo, Singcord ZLP-9315. (From S. John Bacon Publishing Co, 12-13 Windsor Ave, Waverley 3149.)

Volume 1, reviewed in the September issue, impressed with its smooth, gentle sound and its successor is in much the same category. It is predominantly a vocal recording, but with bright and varied instrumental backing.

The devotional songs of Bill and Gloria Gaither may not be familiar to you but they are very easy on the ear: The Waters Are Troubled — Joy Comes In The Morning — Jesus Is Lord Of All — Thanks For The Sunshine — The Church Triumphant — There's Something About That Name — Gentle Shepherd — Plenty Of Room In The Family — I Could Never Outlove The Lord — Worthy Is The Lamb.

A smoother sound than one expects from modern groups singing recent compositions, this program by the Rick Powell Singers will appeal especially to those who have tended to favour the old-fashioned hymns. (W.N.W.)

in C Minor. In short, a record well worth a hearing—provided you don't mind exchanging some of the traditional formality for virtuosity and exuberance. (W.N.W.)

★ ★ ★

**PETER & THE WOLF (Prokofiev); YOUNG PERSON'S GUIDE TO THE ORCHESTRA (Britten).** Narrated by Will Geer. English Chamber Orchestra conducted by Johannes Somary. Stereo, Astor VSD-71189.

The number of similar albums released over the years attests the popularity of this particular coupling.

"Peter And The Wolf" is a simple tale of the countryside, which serves to highlight various instrumental sounds and to illustrate how they may be used to develop a mood or a story line.

"Young Person's Guide To The Orchestra" is more directly tuition and is a natural follow-on to "The Wolf". It nominates and describes various families of instruments, while weaving their sound into what is virtually a continuous pattern of sound.

If not by name, you will certainly recognise Will Geer from his photograph as grandpa in the TV serial "The Waltons". To my mind, however, Grandpa is not an ideal choice in Australian ears for "The Wolf". His accent is heavy and his efforts to dramatise a tale for the young-uns tends to dominate rather than interpret the music. His "Guide To The

Reviews in this section are by Neville Williams (W.N.W.), Harry Tyrer (H.A.T.), Leo Simpson (L.D.S.), Norman Marks (N.J.M.) and David Edwards (D.W.E.).



Orchestra" is much more successful.

As for the orchestral sound itself, I have no criticism. It exposes individual instruments or groups as necessary, while always ready to assert the orchestra's full weight and authority. Individual reactions will really centre on that one aspect: narration of "The Wolf" (W.N.W.)

★ ★ ★

# THE CLASSICAL GUITARS OF LOS INDIOS TABAJAROS. RCA Victor. Stereo. CPL1-0668.

Los Indios Tabajaros are a very polished pair of guitarists—there is no doubt of that. Forget the fact that they originally came from the Brazilian jungles. On this album, they perform pleasant renditions of light classical tunes and in so doing create a charming Continental atmosphere which is ideal for dining or relaxing. Recording quality is excellent and surface noise on my sample was negligible.

Eight tracks are featured: Valse in A Minor, Op. 34, No. 2 (Chopin) — Fur Elise (Bagatelle in A Minor) (Beethoven) — Recuerdos de la Alhambra (Tarrega) — Hora Staccato (Dinicu-Heifetz) — Valse in A Flat, Op. 69, No. 2 (Chopin) — La Ronde des Lutins (Antonio Bazzini) — Serenata Espanola (Joachim Malats) — Romance de Amor (Vincente Gomez). (L.D.S.)

★ ★ ★

# GOOD MUSIC CLASSICAL HITS. Festival Strings. Festival Stereo L 25206.

I must admit to being dubious about this album from the moment I saw it. You might call it instant disenchantment. The cover portrays three likely lasses in white strapless evening gowns standing in a park setting. Two of them hold a violin each while the third wields the double bass. From their vacuous expressions I suspect they would not know which end to play. To give credit though, they did not wield their instruments like cudgels as did one of the crooks in that famous film, "The Ladykillers".

Once I had listened to a few tracks my fears were largely dissipated. Sure, the

arrangements are a little schmaltzy and there is a female chorus lah-lahing and doo-dooing from time to time but if you like light classics presented in this way, then this locally produced album is a good buy. Recording quality is very good and surface noise on my sample was negligible.

Track titles are: Moonlight Sonata — Hungarian Dance No. 5 — Nocturne in E-Flat — Pathetique Sonata — Rondo Alla Turca — Claire De Lune — Waltz Of The Flowers — Air On A G String — Ave Maria — Sleeping Beauty Waltz — Fur Elise. (L.D.S.)

★ ★ ★

# ROLLERBALL. Soundtrack Recording, with The London Symphony Orchestra conducted by Andre Previn. United Artists L-35597. Festival Release.

This record was quite a pleasant surprise, considering that the movie is built around a particularly violent version of the roller game set some time in the next century. With the exception of the third track on each side, an exercise in synthesiser gymnastics, the best definition of the disc would be a high quality sampler of music from Bach, Shostakovich, Albinoni and Tchaikovsky, played by one of the world's finest orchestras. The classical tracks are: Toccata In D-Minor (Bach) — Symphony No. 8 (Shostakovich) — Symphony No. 5 (Shostakovich) — Adagio (Albinoni) — and another excerpt from Shostakovich, No. 5. The quality and effective use of stereo is excellent. (N.J.M.)

★ ★ ★

# WALTER DE LOS RIOS, OVERTURES. Hispavox L-35486. Festival Release.

Walter De Los Rios is up to his usual tricks in this collection of well known overtures from opera. Each track starts off 'straight' but, after a few bars, a very forward percussion group comes in and everything swings in a way that many obviously enjoy. The overtures given the treatment are: Rosamunde — Romeo and Juliet — Light Cavalry — Die Fledermaus — A Midsummer Night's Dream — Barber Of Seville — Egmont — Don Pasquale.

Like other Hispavox records I have

heard, the sound quality is superb, with excellent reproduction of percussion. I would like to hear their version of 'Golden Wedding'. (N.J.M.)

★ ★ ★

# VIVA MEXICO, Los Mochecumbas. Europa E1040. Astor Release.

It seems a long time since I heard much of 'South of the Border' music and this enjoyable disc certainly brings to mind the popularity of this style of rhythm some years ago. Some of the titles are standards, such as: La Bamba — La Paloma — La Golondrina — La Cucaracha and Cielito Lindo. Other tracks are somewhat more recent: Adelita — Titicaca Lake — Conao Antigo — Tony's Bolero — Guantanamera — Lupita — Coniuno Nuevo — Little Flower — Indios Noches.

The quality is really good and, if your popular music taste is becoming a little jaded, try a little touch of Mexico; I think you'll be pleased. (N.J.M.)

★ ★ ★

# CHARLIE McCOY. Charlie My Boy. Monument L-35550. Festival Release.

This is another rollicking fun record from the Nashville Studios of Monument, with Charlie McCoy on Harmonica and vocal and the longest list of supporting musicians and others I've ever seen on a record sleeve.

The titles are: Old Joe Clark — The Twelfth Of Never — City Lights — I Honestly Love You — New River Gorge — Please Don't Tell Me How The Story Ends — Everybody Stand Up And Holler For The Union — Making Believe — Back Home In Indiana — Sweet Memories — Juke.

The quality is the usual high Nashville standard and this would make a great party record. (N.J.M.)

★ ★ ★

# KING CRIMSON USA. Island Records L 35520. Festival Release.

This is the final King Crimson album. It was recorded live in June 1974, just before the group was disbanded, at the end of a massively successful American tour. The six tracks are: Larks' Tongues In Aspic, Part II — Lament — Exiles — Asbury

## DECCA record brush


1,000,000 CONDUCTIVE BRISTLES  
no anti-static fluids needed

The new DECCA Record Brush consists of a million tiny fibre 'bristles'. As you brush the record surface, upward of a thousand 'bristles' enter each groove and remove more dust and grit than any other product available. In addition, each 'bristle' is electrically conductive. Static on the record is removed as you clean, without the aid of special fluids.

\* \$12.50 at leading Hi-Fi stores & record bars.


Australian Agent: British Merchandising Pty. Ltd., 49-51 York St., Sydney. Ph. 29-1571.

\* Recommended retail price.

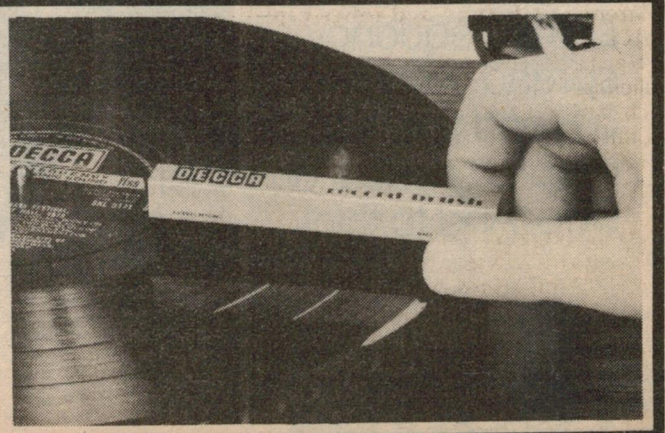



# PHILIPS

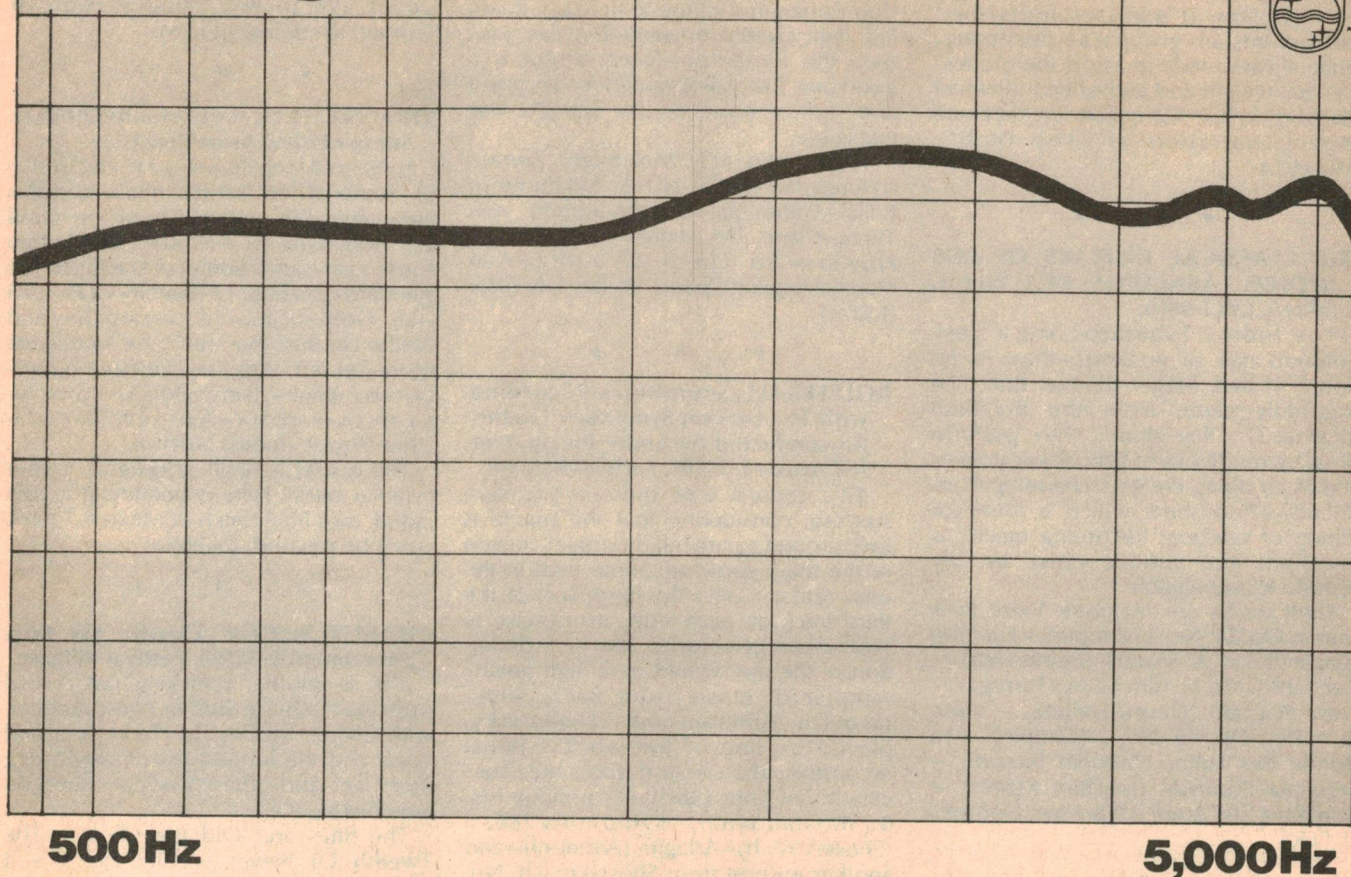

## 500-5,000Hz and it's almost flat. How's that for about \$50 worth!

It's the performance curve of Philips new mid range speakers. That curve is so flat it gives a variation of as little as  $\pm 1$  dB over the same frequency spread. And even beyond those levels the drop is gradual on either side. And to think



**JUST \$50**  
— give or take  
some small change.

this performance is now available for about the \$50 mark. Not bad for a 50 Watt dome squawker speaker. For further information please contact

ELCOMA  
Electronic Components & Materials,  
Box 50, P.O. Lane Cove, NSW 2066  
or telephone 42 1261 or 42 0361.  
Branches in all States.

# ELCOMA



## LIGHTER SIDE

Park—Easy Money—21st Century Schizoid Man.

It goes almost without saying that this record should be played loudly. I found the first track to be particularly impressive, with its muscular syncopated theme that rises through a series of crescendos to an excruciating climax. The final track is from the first-ever King Crimson album, possibly their best known work.

Record quality is excellent, although some tape hiss is evident between tracks. (D.W.E.)

★ ★ ★

### ACKER BILK, HIS CLARINET AND STRINGS. Astor Quad 1030.

No-one can dispute that Acker Bilk can play the clarinet—he can almost make it talk. But he cannot sing (as he tries on one track) and he is definitely better off without string accompaniment. So give us more of Acker Bilk and less of that other nonsense. For those to whom Clarinet and Strings appeal, the recording quality is good.

Track titles are: If I Had A Ribbon Bow—She—That's My Desire—Theme From Swan Lake—Yesterday's Smile—Love—Someone Who Cares—Bachianas Brasileiras No. 5 Aire—At Twenty One—Summer Flower—The Promise Of Your Eyes—Someone To Watch Over Me—Wandering—Auf Wiedersehen, My Dear. (L.D.S.)

★ ★ ★

### STEPPIN' OUT WITH LENNY DEE. MCA Stereo MAPS 7639.

Lenny Dee has probably done more to popularise the Hammond Organ than any other exponent and he has certainly been at it for some time now. But he shows no sign of losing the ability to put out lively versions of popular songs. Recording quality on this album is fine and the stereo spread is of the three-channel variety. A good buy.

Eleven tracks are featured: Steppin' Out (Gonna Boogie Tonight)—Bonaparte's Retreat—Room Full Of Roses—If You Love Me (Let Me Know)—You're Having My Baby—Rock Your Baby—Feel Like Making Love—Annie's Song—The Entertainer—I Honestly Love You—I'm Leaving It All Up To You. (L.D.S.)

★ ★ ★

### IF I ONLY HAD TIME. John Rowles. MCA Coral stereo COPS 7546.

I could adopt this album as my own theme song but that is not the only reason for approving this disc. The big-voiced New Zealander is a fine performer who puts a great deal of zest and feeling into every song. And this disc is a bonus with sixteen tracks and all of them good numbers. Quality is good. A very good buy.

The sixteen tracks are: If I Only Had Time—I Must Have Been Out Of My Mind—Another Tear Falls—One Room World—Aquarius/Let The Sunshine In—Save The Last Dance For Me—Hush... Not A Word To Mary—One Day—All Kinds Of People—A Lifetime Of Love—You've Lost That Lovin' Feelin'—What Are You Doing The Rest Of Your Life—What Greater Love—Where Do I Begin (Love Story)/The Windmills Of Your Mind—In The Name Of Heaven—The Way Of Love. (L.D.S.)

★ ★ ★

### THE MOOD I'M IN. ABC Records. L35571 Festival Release.

Diana Trask left these shores some time ago to make her name in the USA and, judging by her performance on this disc, she has certainly done this. A number of the tracks are getting a lot of play at the moment, particularly 'Oh Boy' and 'Country Bumpkin'. Other tracks are: A Whole Of Things To Sing About—Fever—Back Home Again—There Has To Be A Loser—I Can Take A Little Heartache—Sunshine—Evil On Your Mind—Alone Again Naturally—I've Been So Wrong For So Long.

There is a sad country theme running through most of the songs but the overall quality is excellent. (N.J.M.)

★ ★ ★

### DON WILLIAMS. YOU'RE MY BEST FRIEND. ABC Records. L-35556. Festival Release.

If you like a pleasant deep voice in a series of country flavoured songs, give this record a hearing. The tracks are: You're My Best Friend—Help Yourself To Each Other—I Don't Wanna Let Go—Sweet Fever—Someone Like you—Love Me Tonight—Where Are You—Tempted—You're The Only One—Reason To Be. The list of backing

## Reubert Hayes . . . "congratulations"

### FAVOURITES OF THE FORCES SING-SONG. Reubert Hayes playing the Rogers Century Organ. Stereo, M7, MLX-094.

It was some time ago that recordist Parker Oakes rang me to say that he'd just taped an exciting performance by his father-in-law, veteran theatre organist, Reubert Hayes. Now I know why he was so keen about it.

With a 3-manual Rogers "Century" electronic organ especially set up in the Civic Theatre in Newcastle, NSW, Reubert Hayes had everything going for him to record a program of the community songs that won him Australia-wide fame during the war, broadcasting from Brisbane's Regent Theatre. Remember them?

Blighty; Anchors Aweigh; Marines' Hymn—Roses Of Picardy—Tipperary; Bless 'Em All; Long, Long, Trail; Lili Marlene; Gundagai; Mexicali Rose;

musicians reveals a number of names that crop on nearly any record that comes from the studios in Nashville. This in itself is a virtual guarantee of musical competence these days. (N.J.M.).

★ ★ ★

### JOHN MACDONALD, Fireside Scottish Accordion Singalong. M7 Stereo MLX 091.

Take a well played accordion, mix it with a piano, organ and percussion backing and you have a sure-fire recipe for a good record like this one. Not all the titles fit in with the Scottish theme of the title, but one can overlook this.

The tracks are: Que Sera Sera—C'est Si Bon—Scottish Soldier—Pub With No Beer—China Doll—Those Were The Days—Volare—Help Me Make It Through The Night—The Old Northern Lights Of Old Aberdeen—I Belong To Glasgow—Moon River—I Get A Kick Out Of You—Mare Mare Mare.

As a party sing along disc it would be hard to beat and the quality is excellent. (N.J.M.)

★ ★ ★

### DAN HILL & HIS MINI-KORG SYNTHESIZER. Interfusion stereo L35523.

This album of Moog grunts, whistles, wails and twangs gets the nod in spite of some negative feelings I have for Moog music. Arrangements are big, bright and have the right flavour of the ridiculous. Record quality is good.

Track titles are: Bubble Gum—Show Me The Way—Push Just A Little Bit Harder—Time Is Tight—Any Kind Bazaar—Kleine Nachtigall—Bicycle Morning—Mr Big Stuff—The Happy Frog—What Do You Wanna Make Those Eyes At Me For—Don't Break This Heart—Why Me—Red River Ride—La La La Love You. (L.D.S.)

Home Fires—Land Of Hope And Glory. Side 2 contains two more medleys, a well played "Jealousy", "A Perfect Day" (strongly reminiscent of Jesse Crawford) and Reubert's signature theme "Beyond The Blue Horizon".

Technically, the mic. hasn't quite caught the percussion and the sound is a trifle "middy" but, as compensation, there's none of the acoustic intrusions that so often occur in recording big acoustic instruments. This is a big electronic in a real theatre and, as I listened, I couldn't help feel that it's the record that rival organ dealers might wish had never been made. The organ has the sounds of a traditional theatre instrument and, most importantly, the complex interplay of tones, and the slight variations in loudness of individual notes that make the sound sonically interesting.


Congratulations to all concerned and to M7 who organised its transcription to disc. (W.N.W.)



**SK-10**

## **EL-SOCKET**


UNIVERSAL BREADBOARDING  
COMPONENT

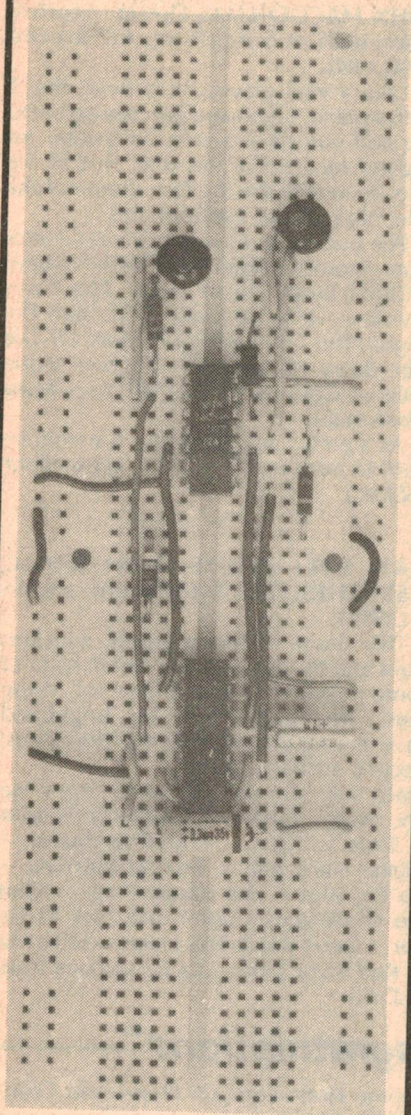

AVAILABLE FROM LEADING  
WHOLESALEERS  
or send direct to:



99 ALEXANDER STREET  
CROWS NEST  
NEW SOUTH WALES  
Telephone: 439 2488, 439 2399



## **Books & Literature**

### **Development technique**

**FROM CONCEPT TO PRODUCTION: A Management Approach**, by N. G. Anderson. Published by Taylor & Francis, London, 1975. Hard covers, 240 x 155mm, 292 pp., price in UK 9.00.

At first sight it may seem inappropriate to review this book here since it is primarily a management text. However it is specifically aimed at those people who are involved in product development in the electronics industry and allied technical fields. Considering the lack of new product development in Australia, by rights it should be a best-seller.

The book is a practical guide to such topics as the establishment of procedures for development projects, planning, budgeting and expenditure control, monitoring of progress, organisational structure and personnel selection. There are several appendices which are also very useful. One on network planning makes mention of tech-

niques such as PERT and CPA and others give specimen target specifications for typical product development programs.

Our review copy came directly from the publisher. (L.D.S.)

### **All about pictures**

**TRANSMISSION and DISPLAY of PICTORIAL INFORMATION**, by D. E. Pearson. Published by Pentech Press, London, 1975. Hard cover, 209 x 152 mm, 224 pp., many diagrams. Price in UK £5.95.

A fairly advanced treatise on the fundamental principles of electronic systems designed to process, store or transmit pictorial information. It has been written primarily for communications engineers working in broadcast and cable TV, facsimile, videotelephones, computer terminals, scanning electron microscopes and similar fields, but is also suitable as a text for senior undergraduate and graduate university courses, and as a research reference work.

The material covered is shown fairly

## **Quartz Crystals, Filters**

*AWA have a complete  
range of Crystals for  
all Commercial and  
Military Applications*

- \* Highest Quality*
- \* On Time Deliveries*
- \* Emergency Manufacturing Service*
- \* 12 Months' Warranty*

*Over 40 years of experience is your guarantee that our  
Crystals can meet your most exacting requirements.*

Crystal Section  
Amalgamated Wireless (Australasia) Limited  
422 Lane Cove Road, North Ryde, N.S.W. 2113  
Telephone 888 8111. Telex 20623  
Branches in all States





concisely by the chapter titles: 1—The Mathematical Analysis of Images; 2—Properties of the Eye Affecting System Design; 3—Scanning; 4—Reception and Display of Monochrome Pictures; 5—Transmission of Monochrome Information; 6—Displays in Colour; 7—Transmission of Colour Information; 8—Subjective Assessment of Picture Quality. The book ends with an extensive list of references, and a topic index.

Although much of the treatment uses abstract mathematics such as Fourier Transforms, many of the basic concepts presented in the text are readily understandable by non-mathematical readers, thanks to the author's clarity of expression. The book may therefore be of interest and value even to non specialists.

The review copy came from the publisher, with no advice regarding local price and availability. (J. R.)

## Now available

When the Semicon International Transistor Manual (1974 Edition) was reviewed for the April 1975 issue, no details were to hand regarding local price or availability. However we have now been informed that copies are available from Dick Smith (Wholesale) Pty Ltd of 162 Pacific Highway, Gore Hill NSW 2065. The price quoted is \$28.00 plus post and packing, where applicable.

## EA HANDBOOKS:

### BASIC ELECTRONICS

Basic Electronics, now in its fifth edition, is almost certainly the most widely used manual on electronic fundamentals in Australia. It is used by radio clubs, in secondary schools & colleges, and in WIA youth radio clubs. Begins with the electron, introduces and explains components and circuit concepts, and progresses through radio, audio techniques, servicing, test instruments, etc. If you've always wanted to become involved in Electronics, but have been scared off by the mysteries involved, let Basic Electronics explain them to you.

\$3.00 plus 60c p & p

### FUNDAMENTALS OF SOLID STATE

Fundamentals of Solid State is in its second printing, showing how popular it has been. It provides a wealth of information on semiconductor theory and operation, delving much deeper than very elementary works, but without the maths and abstract theory which make many of the more specialised texts very heavy going. 'Solid State' has also been widely acclaimed in colleges as recommended reading—but it's not just for the student. It's for anyone who wants to know just a little bit more about the operation of semiconductor devices.

\$3.00 plus 60c p & p

Electronics Australia,  
Box 163, Beaconsfield, NSW 2014.

# BOOKS

Just some of the titles from the biggest range of radio and electronics books in Australia.

If the book you require is not listed below it can be ordered from us.

Latest editions of four of the most popular books on the subject:		
Radio Handbook (William I. Orr) 19th Edition	\$19.40	
World Radio TV Handbook 1975—A Complete Directory of International Radio and Television	\$8.95	
The A.R.R.L. Antenna Book (American Radio Relay League)	\$5.10	
The Radio Amateur's Handbook—The Standard Manual of Amateur Radio Communication (ARRL) 1975 Edition	\$8.95	
<b>Philips Books:</b>		
Philips 1974 Pocketbook—Electron Tubes, Semiconductors, Integrated Circuits, Components and Materials	\$2.75	
Philips Application Book—Photomultipliers	\$3.45	
Philips Application Book—Field Effect Transistors	\$3.45	
Philips Application Book—Fast Response Photomultipliers	\$3.45	
Philips Product Book—Thyristors	\$6.75	
Miniwatt Technical Data—Valves, Picture Tubes, Semi-conductor Devices—7th Edition	\$3.75	
<b>New Books:</b>		
30 IC Projects (Herbert Friedman)	\$3.75	
Unique IC OP-AMP Applications (Walter G. Jung)	\$6.35	
IC OP-AMP Cookbook (Walter G. Jung)	\$14.90	
The Amateur Radio Vertical Antenna Handbook (Paul H. Lee)	\$7.10	
<b>De Muiderkring Publications:</b>		
Transistor Equivalents—9th Edition (Entirely revised and extended)	\$5.75	
TTL Digital Integrated Circuits Part 1 Series 7400-74132 With Equivalents	\$8.95	
Semiconductor Handbook Part 1—Transistors 1st Edition (A. E. C. Van Uterren)	\$8.95	
The World's Radio—Broadcasting Stations & European FM/TV (C. J. Both)	\$8.95	
<b>National Data Publications:</b>		
MOS Integrated Circuits	\$5.75	
Linear Integrated Circuits	\$5.75	
Interface Integrated Circuits	\$3.85	
Digital Integrated Circuits	\$5.75	
CMOS Integrated Circuits	\$1.95	
Special Function Analog and Digital Circuits	\$3.85	
Voltage Regulator Handbook	\$3.85	
Transducers—Pressure & Temperature—August 1974	\$3.25	
<b>American Radio Relay League Publications:</b>		
Single Sideband for the Radio Amateur	\$4.35	
Specialized Communications for the Radio Amateur	\$4.50	
Understanding Amateur Radio	\$4.10	
The Radio Amateur's VHF Manual	\$5.10	
<b>Audel Publications:</b>		
Television Service Manual (Robert G. Middleton)	\$9.70	
Radiomans Guide (Robert G. Middleton)	\$8.70	
Electric Motors (Edwin P. Anderson)	\$8.90	
House Wiring (Roland E. Palmquist)	\$8.30	
Electronic Security Systems (Leo G. Sands)	\$8.90	
<b>Howard W. Sams Publications:</b>		
Television Broadcasting—Tape and Disc Recording Systems (Harold E. Ennes)	\$19.40	
Workshop in Solid State (Harold E. Ennes)	\$14.10	
Television Broadcasting: Equipment, Systems and Operating Fundamentals (Harold E. Ennes)	\$19.40	
AM-FM Broadcasting: Equipment, Operations and Maintenance (Harold E. Ennes)	\$19.40	
Television Broadcasting: Systems Maintenance (Harold E. Ennes)	\$19.40	
Television Broadcasting: Camera Chains (Harold E. Ennes)	\$18.00	
RTL Cookbook—A complete Guide to the Understanding & Using of Resistor Transistor Logic (RTL) Digital Integrated Circuits (Donald E. Lancaster)	\$7.00	
Transistor Fundamentals—Volume 1—Basic Semiconductor and Circuit Principles (R. J. Brite)	\$6.35	
Transistor Fundamentals—Volume 2—Basic Transistor Circuits (Charles A. Pike)	\$6.35	
Transistor Fundamentals—Volume 3—Electronic Equipment Circuits (Martin Gersten)	\$6.35	
Security Electronics (John E. Cunningham)	\$6.35	
Guide to High Fidelity (Institute of High Fidelity)	\$5.20	
Colour TV Servicing Made Easy—Volume 1 (Wayne Lemons & Carl Babcoke)	\$6.10	
Colour TV Servicing Made Easy—Volume 2 (Wayne Lemons & Carl Babcoke)	\$7.60	
How To Read Schematic Diagrams (Donald E. Herrington)	\$5.70	
Transistor TV Servicing Made Easy (Jack Darr)	\$6.35	
Handbook of Transistor Circuits (Allan Lytel)	\$7.60	
Tube Substitution Handbook—No 17	\$2.20	
Know Your VOM-VTVM—Now Includes Vacuum Tube, Solid State, Analog, Digital (Joseph A. Risse)	\$7.00	
101 Ways to Use Your VOM and VTVM (Robert G. Middleton)	\$5.75	
101 More Ways to Use Your VOM and VTVM—2nd Edition (Robert G. Middleton)	\$5.75	
101 Ways to Use Your Oscilloscope (Robert G. Middleton)	\$5.75	
Semiconductor Handbook (Robert B. Tomer)	\$7.40	
Troubleshooting with the Oscilloscope (Robert G. Middleton)	\$7.00	
Transistor Specifications Manual—6th Edition	\$5.75	
TV Servicing Guide—Arranged by Trouble Symptoms (Leslie D. Deane & Calvin C. Young, Jr.)	\$5.75	
Transistor Colour-TV Servicing Guide (Robert G. Middleton)	\$6.35	
Electric Guitar Amplifier Handbook (Jack Darr)	\$7.65	
EIA Electronics Multimedia Handbook (Ed. Irving W. Larson) Sponsored by Electronic Industries Assn.	\$6.35	
<b>Babani Publications:</b>		
First Book of Transistor Equivalents & Substitutes (B. B. Babani)	\$1.30	
Second Book of Transistor Equivalents & Substitutes	\$3.15	
1st Book of Hi-Fi Loudspeaker Enclosures	\$1.95	
Radio and Electronic Colour Codes and Data Chart	60c	
World's Short Medium and Long Wave FM & TV Broadcasting Stations Listing	\$1.95	
<b>Other Titles:</b>		
TV Fault Finding—5th Revised Edition (J. R. Davies)	\$3.00	
73 Dipole and Long-Wire Antennas (Edward M. Noll)	\$6.35	
73 Vertical, Beam and Triangle Antennas (Edward M. Noll)	\$6.35	
Slow Scan Television Handbook (Don C. Miller & Ralph Taggart)	\$7.10	
Basic Television—Principles and Servicing 4th Edition (Bernard Grob) New Edition just received	\$21.80	
Colour Television Servicing—Second Edition (Gordon J. King)	\$13.20	
Colour Television Theory—PAL-System Principles & Receiver Circuitry—SI Units (Hutson)	\$11.30	
Colour Television with Particular Reference to the PAL System (G. N. Patchett)	\$15.35	
PAL Colour Television for Servicemen (W. C. Cook)	\$15.00	
T.V. Technician's Bench Manual (G. R. Wilding)	\$7.50	
T.V. Camera Operation (Gerald Millerson)	\$5.95	
The Mazda Book of PAL Receiver Servicing (D. J. Seal)	\$18.40	
Pin-Point TV Troubles in 10 Minutes—Check Charts	\$8.05	
Colour TV Repair (Martin Clifford)	\$4.35	
The Oscilloscope (George Zwick)	\$6.70	
Pin-Point Transistor Troubles in 12 Minutes	\$9.65	
Check Charts—New Transistor Trouble-Shooting Techniques	\$9.00	
Improving your Hi-Fi (John Earl)	\$5.00	
Set Up Your Own Hi-Fi—A Beginner's Guide (R. H. Warring)	\$5.00	
Motorola High-Speed Switching Transistor Handbook 9th Edition	\$5.00	
Transistor Pocket Book (R. G. Hibberd)	\$6.75	
Transistor Manual—Light-Weight Edition—Circuits, Applications, Characteristics, Theory (General Electric)	\$3.95	
Basic Theory and Application of Transistors (Dover Publications, New York)	\$3.00	
Test Equipment for the Radio Amateur (H. L. Gibson)	\$6.65	
Radio Valve and Transistor Data—9th Edition (Compiled by A. M. Ball)	\$3.00	
Pickups and Loudspeakers—How To Choose and Use (John Earl)	\$9.00	
Audio Technician's Bench Manual (John Earl)	\$8.80	
Ham Radio—A Beginner's Guide (R. H. Warring)	\$5.65	
Ham Notebook—From the Editors of Ham Radio (Ed. James Fisk)	\$5.10	
Manual of Sound Recording—Second Edition (John Aldred)	\$10.50	
The All-in-One Tape Recorder Book—A Focal Soundbook (Joseph M. Lloyd)	\$3.50	
Introducing Electronic Systems (Ian R. Sinclair)	\$4.50	
Introducing Amateur Electronics (Ian R. Sinclair)	\$3.75	
Automobile Electrical Systems—2nd Edition Questions and Answers (A. J. Coker)	\$1.85	
Basic Electricity—Revised Second and Enlarged Edition (Prepared by the Bureau of Naval Personnel)	\$5.40	
Electrical Calculations (Arthur Mychael)	\$4.45	
RCA Solid State Hobby Circuits—68 Useful Circuits for Beginners and Experts	\$4.50	
RCA Electro-Optics Handbook	\$6.40	
Radio and Electronic Laboratory Handbook 8th Edition (M. G. Scroggie)	\$18.50	
SCR Manual—Fifth Edition—Including Triacs and Other Thyristors (General Electric)	\$5.65	
How To Get the Most out of Your Pocket Calculator (Henry Mullish)	\$1.95	
Public Address Handbook—A Manual of Sound Reinforcement (Vivian Capel)	\$9.00	

For Mail Orders please add 90c L. cal—\$1.75 Interstate

McGILL'S AUTHORISED N.C. AGENCY PTY. LTD.  
187 Elizabeth Street, Melbourne. Phone: 60 1475-6-7



# Product reviews & releases

## HMV 18-inch "Braddon" colour receiver

A recent, and very popular addition to the HMV range of colour television receivers is the "18-inch" "Braddon" model 12613. Manufactured for EMI by the Japanese General Corporation, it conforms in all respects to Australian standards, and is already building up an excellent reliability record.

While obviously aimed at the lower end of the market in terms of price, the "Braddon" is in no sense a "cut-corners" design. It is housed in a neat wood-grain finished cabinet, with a front fascia of matte black and satin chrome. The rear of the receiver is enclosed by a removable moulded cover, permitting direct access only to the antenna connections, the preset hold controls, and vertical height and linearity. It would obviously be a very suitable receiver for small to medium viewing situations.

Conforming to Australian standards, it offers full PAL-D colour decoding and includes a 13-position tuner covering all existing local VHF channels, with in-built automatic fine tune. However, it also includes a UHF tuner covering channels 21 to 68, against the day when these are put into service in particular areas. As normally received, the UHF tuner feeds in via VHF channel 11 but this can readily be altered by a local technician. It involves reinserting the channel 11 coil unit, which is included inside the cabinet, and diverting the UHF tuner output to any other available channel.

Controls on the front panel include the VHF channel selector switch, the vernier tuning knob for UHF transmissions, an automatic tuning in-out switch which operates for both bands, and a power off-on. Near the top right hand corner are slider controls for colour saturation, brightness, contrast, and volume.

Aerial input arrangements also offer a maximum of convenience. For normal VHF operation, provision is made for either 300-ohm balanced (terminals) or 75-ohm unbalanced (coax. connector), with a slide switch to select the one desired. It can therefore be used with an indoor antenna (where adequate), an existing outdoor antenna, or a completely new installation. Separate terminals are provided for connection to a 300-ohm UHF antenna.

The "Braddon" receiver uses a standard delta mask picture tube. Magnetic shielding plus automatic degaussing render the set relatively insensitive to external magnetic fields. HMV's normal procedure is to unpack and check out each receiver at local distribution centres and, in particular, to make sure that purity and convergence are correct. They are then installed in buyers' homes, normally with attention only to the more superficial aspects: siting, aerial, AGC adjustment and, of course, general performance.

Of some note is the fact that the picture tube

*As normally supplied, the Braddon receiver has four small buffers allowing it to be placed on a small table, or other surface. If desired, HMV dealers can arrange supply of a suitable mono-column trolley, using the same attachment screws as for the feet. This is not included in the normal price.*

is a 90-degree type rather than 110-degree, as favoured by some manufacturers. It means that the overall depth of the receiver is greater (D-471mm, W-631mm, H-435mm), the rear of the tube protruding behind the main cabinet woodwork by more than would otherwise be the case. This would be of no consequence where the receiver is across a corner but could be a consideration where it had to stand on a shelf or against a wall.

HMV (and the General Corporation) stress, however, that the 90-degree tube has special advantages of its own. Convergence is more easily optimised but, more importantly, much less deflection power is required to drive the 90-degree tube. This shows up as less stress on the deflection devices and a very significant saving in power consumption, and therefore heat dissipation within the cabinet. HMV see this as an important factor in the reputation for reliability which the receiver has built up already since its release on the Australian market.


Except for the picture tube itself, the circuitry is entirely solid-state, involving 4 IC's, 42 discrete transistors and 55 diodes.

Of special interest is the colour decoding circuitry, which is really a spin-off from pioneering work by the General Corporation in connection with single-gun colour tubes. Instead of the more usual phase-locked 4.43MHz sub-carrier oscillator with phase sensing and switching, the "Braddon" receiver has two phase-locked oscillators, one at 4.43MHz and the other offset by half the line frequency. By a process which would defy description in anything but a long article the

two oscillators can be used respectively to resolve the B-Y and R-Y luminance components, without resorting to switching as such, and with a notably high immunity to errors caused by noise. The system is described in detail in the receiver manual and was also explained by A. Becker in "Wireless World" for January 1972.

How does the "Braddon" receiver perform? As delivered into a typical suburban home, what was classified as a "deliberately typical" unit showed good colour purity and acceptable convergence on a test pattern. Convergence errors were mainly concentrated in the corners outside the circle of a Philips electronically generated test pattern. Grey-scale tracking on the same pattern seemed to be good, although both the contrast and brightness sliders call for fairly critical adjustment to ensure proper subjective black and white.

HMV say that the receivers are adjusted before delivery to a white point equivalent to TV standard illuminant "D" at 6500K. While we did not attempt to verify this figure, the

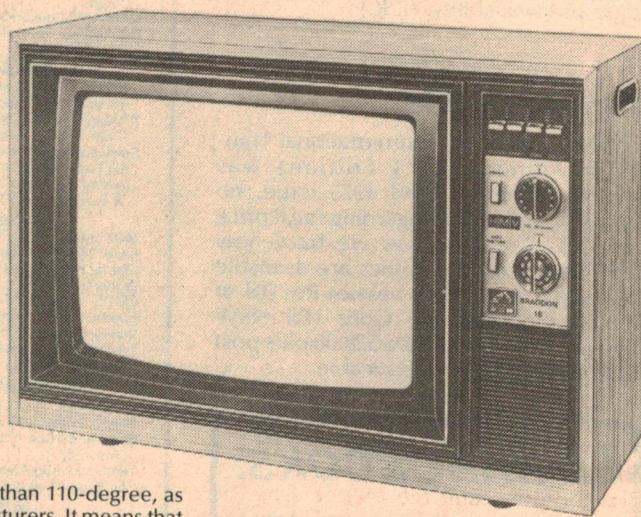

receiver did exhibit good whites although our own judgement would have been to nudge the blue gun up a trifle. There was some suggestion of chroma shift on a test pattern but it was not evident on program material. In fact, colour performance on program was excellent.

On a station-to-station basis with a quite average outside antenna, behaviour was completely satisfactory with the automatic fine tune obviating any obligations on that score. The sound was clean at all times, with no suggestion of hum or frame buzz.

In short, the "Braddon" receiver should be an excellent proposition for any situation requiring a nominal 18-inch or 43cm (viewing diagonal) screen.

Recommended retail price for the receiver is \$579, a figure which includes delivery and installation, 90 days full warranty, and 12 months warranty on the colour picture tube. Normal service contracts can be arranged with HMV retailers to cover the period beyond warranty. The distributors are aware that the "Braddon" may be offered at less than the recommended retail price and this is now quite legal and ethical. However, they stress that customers should make sure that they receive all the entitlements that are covered by the recommended figure.

Further information on the "Braddon" receiver can be obtained from HMV retailers, EMI branch offices or from EMI (Australia) Ltd, 10 Parramatta Rd, Homebush, NSW 2140. (W.N.W.)



## Antenna rotator for colour TV, radio amateurs

In some areas, satisfactory TV reception in either colour or monochrome can only be achieved on all channels by using an antenna rotator. The Stolle type 2010 is an automatic unit very suitable for both TV and amateur radio antennas.

Made in Western Germany, the Stolle 2010 antenna rotator has been designed to give accurate positioning of both TV and amateur radio antennas. It will cope with antennas ranging in size up to a standard 3-element beam for the 14MHz or "20 metre" amateur band, so that it can easily cope with the largest VHF TV antennas.

In contrast with a simpler "memo-matic" unit in the Stolle range, the 2010 is described as "automatic". Positive synchronisation between the control unit and antenna positions is ensured by means of a balanced-bridge servo circuit. As a result the two cannot get "out of step", and do not require periodic resetting.

The antenna drive unit is housed in a very sturdy casing of cast aluminium alloy, which is fully waterproof. The drive shaft is also a casting, with the final gear an integral part of the casting so that it cannot come loose. The shaft is hollow, and designed to take antenna masts up to 38mm (1½in) in diameter. It is also double-ended, to allow the rotating mast to be clamped at both top and bottom of the drive unit for greater resistance to the various forces exerted by windage.

Inside the drive unit the rotator uses a worm drive for the final transmission, to minimise windmilling. The motor also has a positive disc brake system, to prevent coasting overshoot. The reduction gear chain features an overtravel clutch to allow the motor to gain momentum before the load is engaged.

The control unit is housed in an attractive case moulded from impact resistant plastic. It has the position command knob as its single control, turning through an angle of approximately 270 degrees—but calibrated for the full 360 degrees

of rotation provided by the drive unit. The direction of antenna rotation is indicated by indicator lights, which extinguish when the antenna reaches the position dialled. Time for a full 360 degrees of rotation is approximately one minute.

The motor shaft bearings of the drive unit are lubricated for life. Motor drive voltage is a nominal 42V, so that the cable between the control and drive units carries no dangerous voltages. Total power consumption of the system is 60W.

The Stolle 2010 comes with four toothed mast clamps, two for attaching the drive unit to the main mast and the other two for attaching the rotating mast using two U-bolts supplied also.


Probably as a result of its German origin, the unit is designed for nominal 220V mains and no provision appears to be made for adjustment. However the supply is automatically disconnected

from the power transformer in the idle state, and this, together with the intermittent mode of operation in typical service, should mean that overheating is unlikely even where the mains voltage rises to 250V or more.

An optional extra available for use with the Stolle 2010 is an auxiliary thrust bearing, to allow the unit to cope with very heavy amateur antennas.

Also apparently regarded as an optional accessory is the 5-core cable required to interconnect the control and drive units; such a cable is not supplied as part of the basic system, even though it won't work without one. This seems a rather odd use of the term "optional", although it would no doubt be difficult to decide upon a "standard" cable length.

Local agents for Stolle are R. H. Cunningham Pty Ltd, of 493-499 Victoria Street, West Melbourne, Victoria and 4-8 Waters Road, Neutral Bay, NSW.

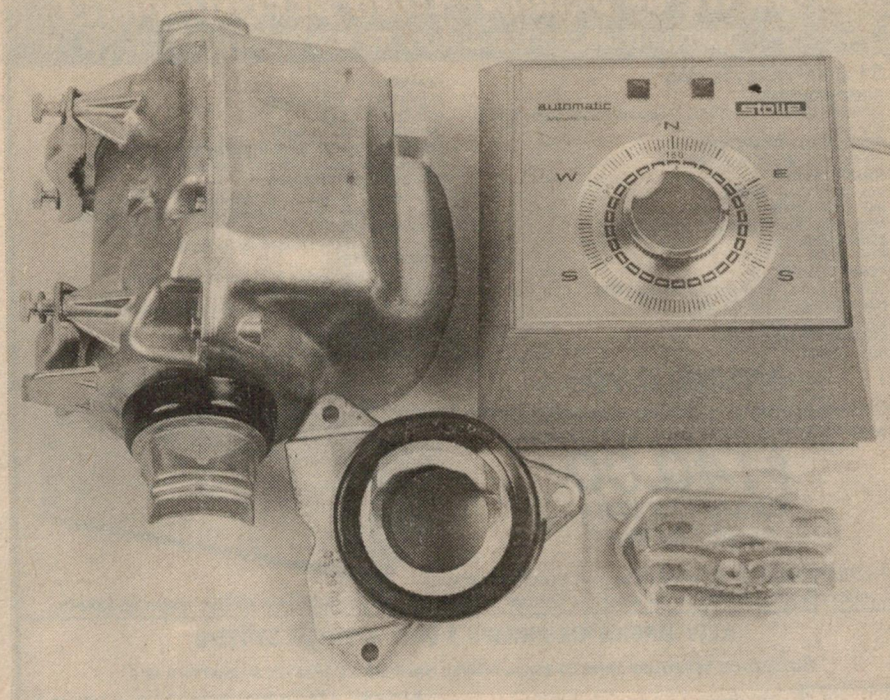

## Cordless iron from scope

Designed and manufactured by Scope Laboratories in Melbourne, this new cordless soldering iron uses the same heating element, tip and barrel as their well-known Superspeed irons. Operating from two internal nickel-cadmium D cells, it is claimed to perform from 100 to 400 joints on one charge, with recharging in about 14-16 hours from a car battery, optional power supply or an existing "Scope" iron transformer.

The iron uses a trigger switch, and provides 60 watts of tip heating. The case is designed to counterbalance the two relatively heavy batteries, for convenience and minimum operator fatigue.

The Scope Cordless 60W iron comes complete with a spare tip and element, and an instruction book. Distributed by IRH Components, a division of Natronics Pty Ltd, it should be available from electronic wholesalers and retail outlets together with major hardware stores.





## NEW ALL-TRANSISTOR STEREO AMPLIFIERS ULTIMATE IN DESIGN—LONG DEPENDABILITY

Using all silicon transistors 50 WATTS—RMS

### SPECIFICATIONS

#### POWER OUTPUT

25 watts per channel R.M.S. Total output 50 watts R.M.S.

8 ohms

#### FREQUENCY RESPONSE:

20 cycles to 40,000  $\pm$  1dB

#### HUM & NOISE:

Aux. 70dB Mag. 60dB.

#### INPUT SENSITIVITY:

Mag. 2mv. Aux. 250mv.

#### EQUALISED:

Mag. RIAA.

#### TONE CONTROLS:

Bass 50 c s  $\pm$  13dB. Treble 10kc s 15dB.

#### HARMONIC DISTORTION:

Less than .05 per cent.

#### LOUDNESS CONTROL:

50 c s 10dB.

#### SCRATCH FILTER:

(high filter) at 10kc s 5dB.

#### RUMBLE FILTER:

(low filter) at 50 c s 5dB.

#### PROVISION FOR TAPE RECORDER:

Record or playback with din plug connector.

#### SPEAKER SWITCHING:

Two sets of speakers can be connected and selected by switch on front panel; they can also be driven together.

#### HEADPHONES:

Headphone jack is situated on front panel.

#### DIMENSIONS:

16 $\frac{1}{2}$ in. x 11in. deep x 5" high. Weight 16lbs.

#### POWER SUPPLY:

Regulated power supply with switching protection for output transistors.

#### SEMICONDUCTORS:

30 Silicon transistors plus 7 diodes.


### — MODEL C.700 —

Cabinet available in teak or oiled walnut finish with matching metal trim. \$15.00 extra.

**\$140.00**

**CABINET EXTRA  
PLUS FREIGHT**

PROVISION FOR 4 CHANNEL. All units wired with sockets & control for simulated 4 channel only requires the addition of two extra speakers.

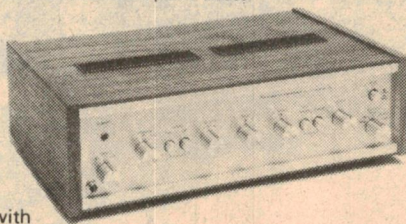

### NEW MAGNAVOX-PHILIPS 3 WAY SPEAKER SYSTEM

FREQUENCY RESPONSE 35Hz TO 25KHz POWER HANDLING CAPACITY 30 WATTS R.M.S.

#### DRIVE UNITS:

Magnavox 8-30 High Performance 8 in. Bass Unit &

Magnavox 6J—6 in. Mid Range Speaker Philips High

Fidelity Dome Tweeter.

SPEAKER KIT: (less cabinet) comprising 1 8-30 speaker. 1

6J speaker, 1 Philips dome tweeter. 1 1mh inductance, 1

8 mfd. & 1.4 mfd. polyester condenser, 1 3" & V 1 6"


tube, innabond & speaker silk, plans for cabinet.

\$42.00. Reg. Post & Packing \$5 Extra.

CABINET AVAILABLE.

## SPECIALS FOR NOV & DEC

### NEW PLAYMASTER 143 AMPLIFIER



*As featured in Sept. & Oct.  
issues of Electronics Aus-  
tralia.*

**\$65.00**

Complete kit of parts including all transistors for this high fidelity 25 watt amplifier, silver anodised panel with black lettering and matching silver anodised knobs & special transformer with electrostatic shield. Reg. post & packing \$5.00 extra.


Deluxe version of the 143 amp. with high & low filters as used in the 140 playmaster loudness control \$7.80 extra.

### NEW A.M. TUNER & MANTEL RADIO

Six transistor A.M. tuner with a variable output suitable for use with any amplifier or tape recorder. Inbuilt audio amplifier & speaker enable this unit to be converted to a mantel radio at a flick of a switch. Supplied in attractive wood grain finished cabinet. Suitable for local stations only.

**\$15.00**

Post & packing  
\$2.00 extra.



### GENESONICS 10 SOLID STATE PORTABLE

This sensitive & selective pocket radio using 6 transistors & 4 diodes is suitable for most local & country areas. Fitted with a 2 $\frac{1}{4}$ " speaker and supplied in attractive & durable plastic cabinet. Earphone supplied. Operates on 2 1.5V pen cells.

**\$5.95**

Post & Packing \$1.20  
(All spare parts available)



## CLASSIC RADIO

245 PARRAMATTA RD, HABERFIELD 2045

PHONES 798 7145, 798 6507

## NEW PRODUCTS

### Cordless PC drill

Designed for convenient drilling of PC boards for prototype and small-scale production work, the Mini Drill model D2 is a hand-held unit operating from four internal penlight cells (type AA or UM3). It weighs 270 grams including the cells, and measures 181mm long by 41mm diameter.



Nominal drill speed is 2500rpm, and the collet-type chuck will take drills from 0.6 to 1.5mm in diameter.


Motor torque is only modest, but is quite adequate for drilling both phenolic and glass laminate PC boards. The D-2 is also suitable for aircraft modelling, detail engraving, jewellery, etc. It comes complete with a combination centre punch and chuck tightening pin, and a 1mm drill, for \$15.75 plus 75c post and packing where applicable.

Optional accessories include a mains power pack adapter and a small bench stand (type STD-50). The stand is priced at \$8.50, again plus 75c post and packing where applicable.

Available from Dick Smith Electronics Pty Ltd, 176 Pacific Highway, Gore Hill, NSW 2065.

### Mini slide switches


These new miniature slide switches for PC board mounting are designed primarily for programming or test switches. They feature a low profile case, epoxy sealed terminal pins and gold flashed contacts and terminal pins. Top and side lever versions are available, in both SPDT and DPDT configurations. Namco Electronics, 239 Bay St, North Brighton, Victoria.





## Balanced mixer

Designed for mass usage applications such as TV tuners, FM tuners, mobile radio and CATV converters, the Hewlett-Packard model 5082-9200 printed circuit balanced mixer covers the range from DC to 1200MHz, with a local oscillator range of 100MHz to 1200MHz. Conversion loss is 6.5dB; isolation is 45dB at 200MHz, 25dB at 900MHz. The 2nd order

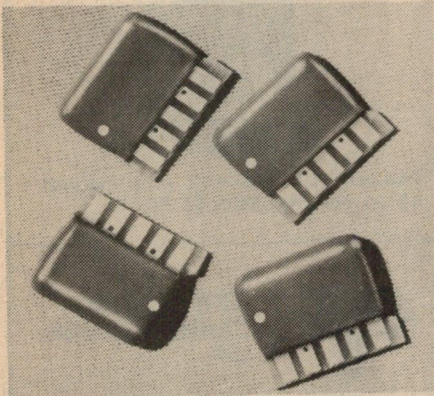


distortion intercept is +38dBm, and its 3rd order intercept is +23dBm.

The mixer contains two Schottky diodes and a PC transformer. It costs less than \$2 in 100k quantities. Hewlett-Packard Australia Pty Ltd, 31-41 Joseph Street, Blackburn, Victoria and branches in each state.

## DIP connector

A new series of solderless one piece DIP plug connectors is designed for terminating flat cable to DIL sockets. Both 14 and 16-pin versions are available, from Ansley Electronics division of Thomas and Betts, PO Box 91, Brookvale NSW 2100.

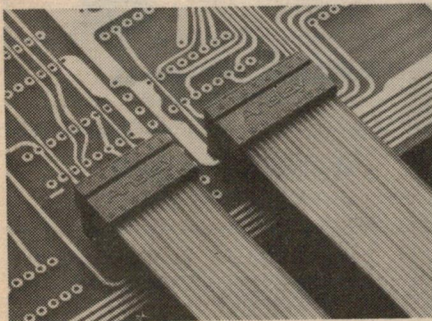

## Low profile relay


A new range of low profile PC board relays, series 1005, offer rugged construction and trouble free operation. The contacts may be wired to provide either a double make double break or SPDT configuration. Coil sensitivity is 900mW, with versions for nominal coil voltages of 6, 12, 24 and 48V DC. The contact rating

for resistive circuits is 1200VA, with a voltage rating of 240V AC or 125V DC, and a current rating of 6A. Overall size with dust cover is 35.6 x 16.5 x 10.8mm.

The relays are manufactured by Hi-G D'Italia SPA, and available in Australia from A. J. Ferguson Electronics, 29 Devlin Street, Ryde NSW 2112.

## Mercury keyswitch

The new M-5 version of the well-known Mercutron keyswitch uses a small cam-operated actuator to provide more precise and reliable operation than previous versions. The switch operates in any position, is absolutely bounce free, and is rated at 200mA/24V DC with a rise time of less than 10 nanoseconds. A

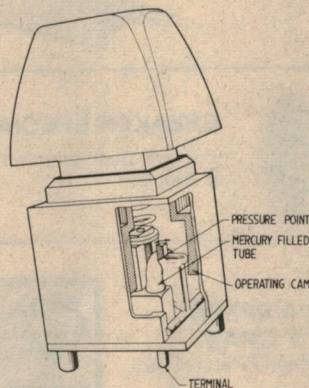


complete line of keyboards in all levels of complexity is available using the M-5 switch, which is available in either single or double pole and NC or NO versions.

Made by Mechanical Enterprises, Mercutron switches are available here from General Electronic Services of 99 Alexander St, Crows Nest, NSW 2065.

## Semiconductors

Paradio Electronics announce that they are now sole Australian agents for Best Semiconductors Ltd of Hong Kong, and can offer good stocks of a wide variety of silicon transistors and diodes assembled in Hong Kong from US chips. Devices include BC147-8-9, BC157-8-9, BC327/337, BA222 and other low power devices. Trade enquiries are welcome. Paradio Electronics, of 7a Burton St, Darlinghurst, NSW 2010.

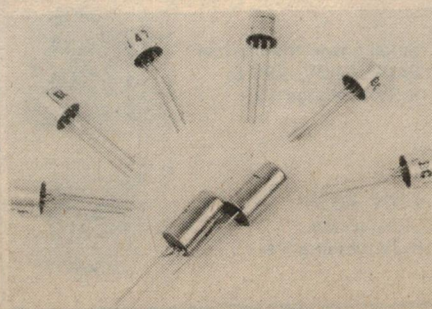

## HAM RADIO ELECTRONICS BARGAIN CENTRE

323 ELIZABETH ST., MELBOURNE 677329

390 BRIDGE ROAD, RICHMOND 425174

Please allow for postage and packing when ordering by mail.

### THIS MONTHS SPECIAL

Latest military design multi-band radio, 30 transistors and diodes. With exclusive (LED) light emitting diode tuning indicator for positive station selection. Battery and electric covers all popular AM and FM bands. Frequency Range: AM 535-1605 KHz, FM 88-108 MHz, TV1 56-108 MHz, TV2 174-217 MHz, AIR-PB2 110-174 MHz and WB 162.5 MHz. Power Source: IDC 6 Volts AC 240 Volts Power Output: 350 mW (Maximum 250mW (Undistorted)). Dimension: 9 3/8 x 3 3/4 x 8 Weight: 4 1/4 lbs. (approx.) Supplied Accessories: Earphone. Batteries (4 size D). Reduced to \$49.50. P.P. \$2.50.



### SCOOP PURCHASE! TRANSISTOR RADIO CIRCUIT BOARDS

IDEAL FOR HOME CONSTRUCTORS

Due to Tariff cuts on transistor radios, we can offer the items below at this price. Most are in working order but no guarantees at these prices.

#### THOUSANDS AVAILABLE

AM 8 TRANSISTOR CIRCUIT BOARDS All new parts. IFs, capacitors, resistors, etc. \$1.50 each or 3 for \$3.50.

AM/FM CIRCUIT BOARDS 10 transistors, all new. Ideal for use as FM tuner. 88-108 MHz. \$2.75 or 3 for \$7.00.

ALSO LARGE QUANTITY OF RADIOS. In various stages of manufacture. Some AC/DC models AM/FM etc. Speakers, cabinets, etc. Personal shoppers only. From \$3 each.

#### BRAND NEW 4-TRACK STEREO CARTRIDGE PLAYERS

2-5 Watts per channel at 8 ohms, 12V DC operation. In sealed boxes. \$15 each P.P. \$2.50.

#### MODEL NC-310 DE LUXE

1 WATT 3 CHANNEL

C.B. TRANSCEIVER

• WITH CALL SYSTEM

• EXTERNAL AERIAL

CONNECTION

#### SPECIFICATIONS, NC-310

Transistors: 13  
Channel Number: 3, 27.240 MHz  
Citiz. Band  
Transmitter Frequency Tolerance:  $\pm 0.005\%$   
RF Input Power: 1 Watt  
Tone Call Frequency: 2000 Hz  
Receiver type: Superheterodyne

\$47.50 each or \$89 a pair. P.P. \$2.00.

#### COMMUNICATION RECEIVERS AND TRANSCEIVERS

BARLOW WADLEY XCR30 Mk II, all band coverage, AM, SSB, CW reception. \$279. Reg. P.P. \$3.50.

KEN KP202 hand held 2 metre Transceiver, 2 Watts output, fitted with xtals for channels 40 and 50, repeaters 1, 2, 3 and 4. \$150. Reg. P.P. \$2.50.

KCP2 Battery Charger for KP202 with 10 rechargeable Ni-Cad batteries. \$35.

200-H. \$13.50, p.p. \$1.00.

90° quadrant meter. Pocket size. AC/V: 10V, 50V, 100V, 500V, 1000V (10,000Ω/V). DC/V: 5V, 25V, 50V, 250V, 500V, 2500V (20,000Ω/V).

DC/A: 50μA, 2.5mA, 250mA

OHM: 60KΩ, 6MΩ

Capacitance: 100pF to .01μF, .001μF to .1μF.

db: -20db to +22db.

Audio Output: 10V, 50V, 120V, 1000V AC

Approx. size: 4 1/2" x 3 1/4" x 1-1/8"




# L.E. CHAPMAN

EST. 1940

103 ENMORE ROAD, ENMORE, N.S.W. 2042. PHONE 51-1011  
NEW Postage Rates Please Add Extra.

## TAPE RECORDER DECK



7 inch reel to reel, complete except head and face plate. \$10


## SUPER SPECIAL B.S.R. RECORD CHANGER





12 inch turntable balanced arm cueing device etc. \$35. pack and post \$1.00. Interstate \$2.50.

## LEVEL AND BALANCE METERS

1200 Ohm  
100 microamps \$2



## Stereo Pick Up Arm Balanced. \$9

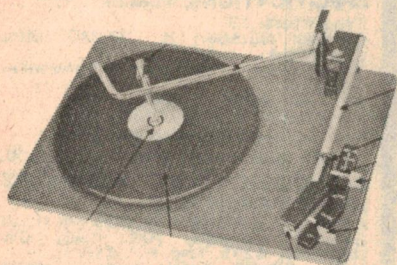

## GARRARD MINI-CHANGER

Stereo. \$19.00  
Pack and post \$1.00  
Interstate \$2.50

**SPECIAL!**

## SOLID STATE STEREO AMPLIFIER AND TUNER

5 Watts RMS per channel, famous make \$30. Pack and post \$3 interstate, \$1.50 NSW.

## DELUXE SPEAKERS FOR CARS

5 inch 8 ohm in plastic cabinets. \$5.50 each.

## TV CHANNEL CHANGE

and fine tuning  
Knobs 75c a pair



## TV TUNERS NEW

in valve type or  
transistor \$10 each



## SPEAKER SPECIAL

6 1/2 inch Dual Cone  
4 ohm \$5

## BSR 4 SPEED 240 V GRAM

Motor and Pickup \$7.95



## Pushbutton Switches 5 position 1 / 240 volts, toggle 50 cents



## SPEAKER CABINETS


10 x 7 1/4 x 4 \$3.50

## POWER TRANSFORMERS

240V, 300 mil,  
225V a side,  
6.3V windings \$8.



240V, 80 mil,  
225V a side,  
6.3V winding \$5.



Small power transformer,  
240V, 220V, 22V &  
6.3V windings \$3.



240V, 60 mil,  
225V a side,  
6.3V winding \$4.



## PORTABLE 4 SPEED RECORD PLAYER



240 volt, solid state \$19, pack and post \$2.00 interstate, NSW \$1.50.



## BSR Ceramic Cartridge Stereo \$4

## STEREO AMPLIFIER

8 Watts RMS per channel. \$25

## TRANSISTOR 7 RADIO

Complete with 3 1/2 inch speaker.  
No cabinet. \$3.95

## PHILIPS TV TUNERS

NT 3014, NT 3011 \$12

## IF TRANSFORMERS 455kHz

\$1.00

## TV HOR OSC COILS \$1.00




## WAFER SWITCHES

2 position: 50 cents

## WAFER SWITCHES

4 position: 75 cents



## SPECIAL GRAMMO MOTOR

and pickup, complete with base & perspex top. \$12.50  
Pack & post \$1.00  
Interstate \$1.50



# L.E. CHAPMAN

EST. 1940

103 ENMORE ROAD, ENMORE, N.S.W. 2042. PHONE 51-1011  
NEW Postage Rates Please Add Extra.

SPEAKERS!	BARGAINS!	BARGAINS!
12 UAC 8 ohm 30 Watts RMS \$22.00	Slide switch 3 position 50 cents	½ Meg Double Pole Switch Pots 50 cents.
12 TACX in 8 or 15 ohm 10 Watts \$11.00	50ohm Pots ideal for ext. Speakers 50 cents. Transistor and Driver Speaker Transformers \$1.00 pair. Ferrite Rods 6½ x ½ inch 50 cents.	Coaxial TV Feeder Cable 75 ohm 30 cents yard
8 TACX 8 ohm \$8.00	Pots 30 mixed values including ganged and concentric \$5	Jack Plugs 6.5mm 50 cents 3.5mm 25 cents R.C.A. Plugs 25 cents
6 x 9 in 8 or 15 ohm \$6.00	In Line Fuse Holders 20 cents	Battery Saver 240 to 6-7. 5-9 Volt, 6 Volt/300mA, 9V 200 mA, \$10
5 x 7 in 8 or 15 ohm \$5.00	Stereo Speaker Wire 12 cents yard	Hook Up Wire 30 mixed colours lengths \$1 bag.
6½ inch 8 or 15 ohm \$4.50	100 Mixed TV and Radio Knobs including Fine Tune and Channel Change \$5	Speaker 4 pin plugs 15 cents
8 x 4 8 or 15 ohm \$4.50	Car radio suppressor condenser 30 cents.	25 mixed 5 and 10 Watt resistors \$2.00
6 x 4 8 or 15 ohm \$3.50	100 mixed condensers micas polyester ceramic \$2 per pack and post 45c.	250 mixed screws. BSA, Whit self-tapper bolts, nuts, etc. \$1.25 bag plus 40c post
5 x 4 15 ohm \$2.50	Electros 3 in one 100-25-40, 24-250-300, 50-250-300 75 cents.	BSR Stereo Player Model P-128 \$52 pack and post \$1.50 Interstate \$2.00
4 inch 8 ohm \$2.75	Screw in 6 Volt Pilot Lights \$1.50 for 10 Plug-in type 10 for \$1.00	TV Aerials Complete Range Hills Colour \$12 to \$60
3 inch 3.5 ohm \$2.50	100 mixed condensers micas polyester ceramic \$2 per pack and post 45c.	Car radio aerials, lockdown, top quality extended 1600 mm \$4.50
5 inch Tweeters 8 ohm \$3.50	Indoor TV Aerials Vertical Spiral \$1	Electros 3-in-one: 20, 400, 450, 10, 400, 450, 75, 50, 65. \$1.00
6 inch Dual Cone Tweeters \$6.00	3.5 to 3.5 Jack Plugs 7 ft. Shielded Cable 75 cents	AWA 11 inch P.I. TV EHT transformers \$5.00
5 x 3 80 ohm \$3.00	6.5 to 3.5 Jack Plugs 7 ft. Shielded Cable 75 cents	Car Converters: 12 volt to 6-7.5-9 volt 500 MA \$6.00
5 inch Magnavox dual cone 8" 27 ohm \$6.00	Mixed Tag Strips 50 cents for Dozen	Microphones—Dynamic 10k \$3.50
8 inch National built in Tweeter \$14.00	Tape Recorder Heads Transistor Top quality suit most recorders \$5.00	Valve Sockets: 7 or 9 pin 10 cents. Octal 10 cents
Rola custom kit 63G x Tweeter C60 woofer cross over and pot \$19.00	Jack Plug Sockets 6.5 mm 35 cents	Speaker Transformers: 6 Watt 7000 to 8 ohm \$2.50; 3½ Watt 7000 to 15 ohm \$1.75; 6 Watt 7000 to 1k \$2.50; 500 to 27 ohm 50 cents.
MSP 2¾ inch 8 ohm \$2.00	Morganite and IRC resistors 33 values \$2 per 100 pack and post 45c.	Ferrite Rods 6 inch 50, 9 x ½ 75 cents
3 inch 8 ohm \$1.50	Philips Gramo Motor and Pickup 4 Speed 6 Volt \$7.75	Pots: 10K ganged log 50 cents 1 Meg ganged log \$1.25 ½ Meg ganged log \$1.25 2 Meg ganged log \$1.25 2 Meg double pole switch \$1.50
Magnavox 6 inch 4 ohm 8 Watts \$5.00	Crossover Condensers 2 mfd 60 cents	Sharp TV Flyback Transformers 8FT 604 \$7.00
Magnavox 5 inch 15 ohm \$4.00	Crystal Microphone Inserts \$1.00 Microphone Transformers 50 cents	Miniature Speaker Transformers, drive and output \$1.00 pair
Pioneer 3½ inch 8 ohm \$1.50	Switch Wafers: 11 position 20 cents	Heat Sinks: 4 x 2 1¾ \$1.50
Magnavox 5 inch dual cone Tweeter \$6.00	Philips Pick-up Cartridges: mono female \$2.50	Universal Mono Pick-up Cartridges: fit most type record players \$3.50
Magnavox 10 inch 8 ohm \$8.00	Pots: 50k 50 cents; 1M 50 cents	
Pioneer horn type Tweeter 3 inch \$9.50	Tape Spools: 7 inch 75 cents	
Pioneer horn type Tweeter \$12.00		
Pioneer midrange 5 inch \$9.50		
MSP 6 x 2 \$3.50		
MSP 4 x 2 5 ohm \$2.50		
MSP 6 x 4 47 ohm \$3.50		
ROLA 5 x 7 47 ohm \$6.00		
ROLA 6 x 9 47 ohm \$6.00		
Magnavox 5 inch 8 ohm \$4.00		
Magnavox 10 Watt \$12.00		
Pioneer 3½ inch 45 ohm \$3.50		
MSP 3 inch 8 W 15 ohm \$3.50		
MSP 8 inch Woofers 8 ohm, 30 Watt \$12.00		
MSP 12 inch 12VAX 8 ohm, 20 Watt RMS \$17.50		
MSP 4 inch 120 ohm \$3.50		
4 inch 120 ohm \$4.50		
Shure M 75/6 Magnetic Pick up Cartridge \$11		
Picture Tubes New 110 Deg 17 inch \$15		



## BSR STEREO RECORD CHANGERS



Improve your hifi system with one of these top quality low cost current model guaranteed turntables.

**STANDARD MODEL:** 3 speed, auto manual, ceramic cartridge, diamond stylus, cueing. **\$35.00**

C141 as above plus player spindle, larger turntable, stylus pressure adjustment. **\$41.95**

C142 as above plus, 4 pole shielded motor, fully adjustable tone arm counter weight, anti-skate and bias control. Heavy duty t'able, magnetic cartridge, diamond stylus. **\$49.95**

**DELUXE C142** as above plus heavyweight-dynamically balanced diecast turntable. **\$59.95**


Postage. N.S.W. \$1.85, Vic. & S.A. \$3.50, W.A. \$5.50.

### P.A. AMPLIFIERS

Solid state, rugged modern design metal cabinet. Manual, circuit included. 240V 50 watt RMS. Freq 50Hz, 20kHz inputs for Mic, Pu, Radio, Aux. 2 Hi Imp. 1 Hi Mic, 1 Lo Mic, 100V-70V line, 4, 8, 16 ohms. **\$115.00**

15 watts RMS. 240V-12VDC powered. Freq. 50Hz-15kHz. Inputs for Mic, Pu, Radio, Aux. 100V-70V line, 4, 8, 16 ohms. **\$69.95**

## SONATA TT-200



All silicon solid-state Hi-Fi Stereo Amplifier, 10 watts RMS per channel. Each channel has separate Bass Treble controls. Inputs for magnetic ceramic cartridge, crystal mic., radio, tape—tape out, stereo headphones, 8-16 ohms instruction booklet circuit supplied. Timber cabinet. Dimensions 14½" x 8" x 4" **\$79.95**

P.P. NSW \$1.70. V. Q. SA, T \$3.50. WA \$5.40

## BSR STEREO PLAYER MODEL P-128

Latest design speed auto or manual operation. 11in heavy weight diecast turntable driven by fully shielded 4 pole dynamically balanced 240V motor. Noise suppressor. Silicone damped cueing device. Square section brushed aluminium pick up arm. Adjustable counterbalance. Calibrated stylus pressure control. Antiskate bias compensator fitted with magnetic cartridge, diamond stylus **\$55.00**


## MAGNAVOX WIDE RANGE TWIN-CONE SPEAKERS

8-16 OHMS 30-16,000Hz  
6WR MK5 12W RMS **\$9.90**  
8WR MK5 16W RMS **\$10.75**  
10WR MK5 16W RMS **\$11.50**  
12WR MK5 16W RMS **\$13.50**  
P.P. NSW \$1.00. Other states \$2.00

### MULTI-CELLULAR HORN TWEETER

2-18 KHz 30 Watts  
8 ohms **\$12.95**  
P.P. NSW \$1.50. Other states \$2.50

## MUSICOLOUR II



Magical Colour Organ operates in conjunction with your home stereo or PA system—simple to connect and operate. 3 channels, 1,500 watt max load per channel.

Complete kit of parts **\$59.50**

Constructed ready to operate **\$69.50**

P & P **\$2.50**

Stereo Magnetic Cartridge

Freq. response, 15-25000Hz, ½" mounting Diamond stylus. Only **\$5.95**

P.P. NSW \$2.50. Other states \$3.50

## BULK BUY BLANK CARTRIDGES & CASSETTES

Low noise guaranteed cassettes

C60. 10 for **\$7.90**

C90. 10 for **\$11.50**

P.P. NSW \$1.35 Other States. \$2.00.

Professional low noise 8 track cartridges.

80 min. 10 for **\$16.50**.

64 min. 10 for **\$13.50**.

P.P. NSW \$1.35 Other States \$2.00.

## SANYO BATTERY CHARGER FOR NICKEL CADMIUM BATTERIES

Will charge 4 penlight or 4 C type or 2 D type simultaneously. Complete with sturdy battery holder case and data. **\$25.95**

P.P. NSW \$1.50 Other States \$2.75.

Rechargeable Ni-Cad batteries

Type A Penlight, \$1.70, 4 for **\$6.00**.

Type C, \$2.90, 4 for **\$10.50**.

Type D, \$3.65, 2 for **\$6.80**.


P.P. NSW \$1.00. Other States \$1.75

Stereo magnetic Cartridge

Freq. response, 15-25000Hz ½" mounting

Diamond stylus. Only **\$5.95**

## PLAYMASTER 3-45L LOUDSPEAKER SYSTEM



Features the mighty 8-30 woofer. 6J midrange and the incomparable Philips ADO16/T8 tweeter. This top quality low cost 3 way Hi-Fi system is available from stock in either walnut or teak veneer and complies with the specs. as per April '75 EA. **\$79.95 each**

Special offer, 8-30, 6J and ADO16/T8 **\$34.50**

Standard 8-30 system. Teak or walnut **\$67.50**

Magnavox 6WR bookshelf system **\$32.50 each**

## KENWOOD

QR-666 Communication Receiver

6 Bands, 170KHz-30MHz AM, SSB, CW **\$290.00**

TS-520 SSB Transceiver **\$545.00**

VARIABLE VOLTAGE TRANSFORMERS

Toroidal wound auto transformer. 240V 50Hz input. 0-260V continuously variable output.

1 amp **\$28.95**, 2 amp **\$32.95**

2½ amp **\$37.95**, 5 amp **\$46.95**

10 amp **\$82.95**.

## 12" PLESSEY 50 WRMS

12U50. 20. 11000Hz RES45Hz. **\$38.95**

12U x 50 Twin 20. 13500Hz. RES45Hz. **\$45.95**

P.P. NSW \$1.75. Other states \$2.95

Mini Soldering Iron


240VAC 30 watts. Constant heat **\$8.50**

Please enclose S.A.E. with your inquiry.

## 10 - IN - 1 MINIATURE MACHINE SHOP

# emco-unimat

## for METAL PLASTICS WOOD

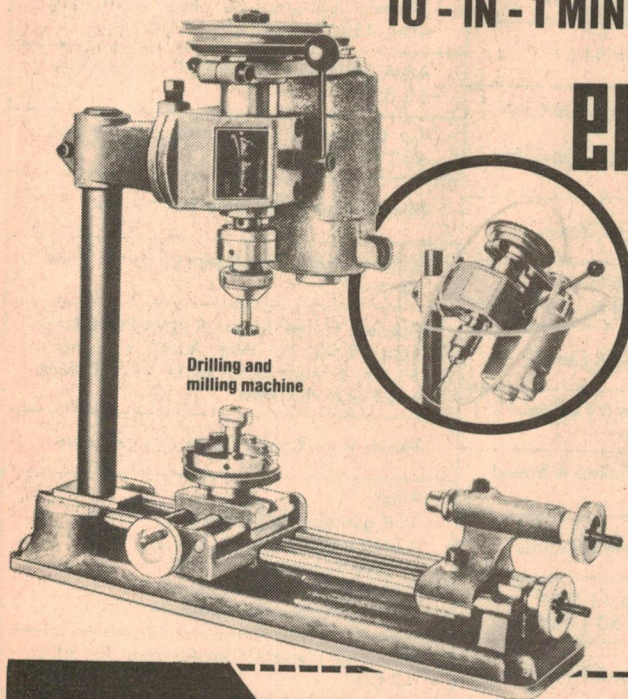

Drilling and milling machine

The basic unit performs:

1. Turning
2. Drilling
3. Milling
4. Surface grinding
5. Tool grinding

Special unimat features:

- Pre-loaded ball bearing spindle
- 11 spindle speeds
- Detachable rotating headstock
- Motorized, ready-to-run.
- Radio and TV suppressed
- Easily convertible for the various operations
- Performs to very close limits

Please forward literature on Emco Unimat.

Name .....


Address .....

.....P/C.....EA 7


## CONVERTS IN SECONDS TO:




Lathe



Surface grinder



Circular saw



Fret and jig saw

# emco-unimat

## MAIL COUPON NOW!

ELLIOTT MACHINE TOOLS  
Pty Ltd.

32 Barcoo St, East Roseville,  
N.S.W. 2069



# The Amateur Bands

by Pierce Healy, VK2APQ



## The Australian repeater scene

The establishment and use of repeaters on the amateur bands has provided a technical challenge as well as a useful means of communication.

Since the use of amateur repeaters was first permitted on the 144MHz to 148MHz band in 1968, there has been many arguments among various individuals and groups about the frequencies to be used. However, during the past eighteen months the situation has stabilised and the frequencies used, with two exceptions, are in unison with the WIA band plan. Both the exceptions are awaiting:

- A decision on the change to television channel 5A in the area served by the repeater.
- Official approval to change from the existing frequencies in use.

To overcome difficulties caused by over-lapping service areas of repeaters on the same channel, changes from the original allocation has, in some cases, been necessary.

Also an increase in the number of channels originally planned, may be necessary in some areas to give adequate coverage and to cope with the increasing traffic.

Technically, development of the repeater systems has involved relatively few amateurs in the design, construction and maintenance of the units. In most cases the task has been undertaken or coordinated by groups within clubs. There has been a gradual decrease in the modification of disposals units and an increase in construction using solid state components and techniques.

Unlike the majority of repeaters overseas, the repeaters in Australia offer "free access" to anyone with the appropriate crystals. The use of a coded signal is not required to activate the repeater. The latter method is designed to limit repeater access to members of the group or club who own the installation.

Another point of interest is that, in accord with a recommendation by the licensing authority, applications to install a repeater are made through the WIA.

Although it has been emphasised that the main object of the repeater system was to assist mobile operation, DX working between home stations is also a feature of the system.

One beneficial trend which seems to have developed where repeaters are installed is a convention whereby base stations monitor the repeater channel rather than the simplex channels. The reason is that the range of the repeater circuit is potentially much greater and is therefore the logical channel for mobiles to use when approaching an area. The result is that immediate contact is generally assured.

The following repeater table has been prepared from information supplied by George Francis, VK3HV, publicity officer, Victorian Division WIA repeater committee, and several other sources. The information was that known as at 21st September, 1975. However, details of any additions or amendments will be appreciated and included in future notes.

The table lists the principal details of Australian repeater facilities

- Those operational
- Those proposed, in course of construction, or awaiting licence.

The details for Newcastle and Gosford shown in brackets will supersede those currently being used and are dependent on satisfactory tests and administrative approval.

Likely call signs are shown in brackets and the asterisk indicates final testing before being placed in service.

Call Sign	Area	Channel	MHz In	MHz Out
VK1RAC	Canberra	3	146.3	146.9
VK2RAB	Tamworth	6	146.25	146.85
VK2RAN	Newcastle		146.4	145.9
		(3)	(146.3)	(146.9)
			146.1	145.6
		(5)	(146.15)	(146.75)
VK2RAG	Gosford			

To celebrate the Royal Australian Corps of Signals 50th anniversary, members of the 2nd Signal Regiment will install and operate an amateur station at the Watsonia Barracks, Melbourne, from November 3 to 10. Picture shows (L to R) Major Darryl Slade, Corporal Robert Linton and Sergeant Barrie Edwards planning the location of aerials for the station. (Story P101)



VK2W1/R1	Sydney	4	146.4	147.0
"	Temporary alternative channel		146.4	145.9
Vk2RAO	Orange	1	146.1	146.7
VK2AMW/RWollongong		6	146.25	146.85
VK3RMA	Mildura	4	146.4	147.0
VK3RAM	Bendigo	2	146.2	146.8
VK3RML	Melbourne	1	146.1	146.7
VK3RGL	Geelong	4	146.4	147.0
VK3RLV	Latrobe Valley	2	146.2	146.8
VK3RWZ	Western Victoria	7	146.35	146.95

VK4RAT	Townsville	1	146.1	146.7
VK4RGC	Gold Coast	1	146.1	146.7
VK4RAI	Ipswich	3	146.3	146.9
VK4RBN	Brisbane	4	146.4	147.0
VK5RAD	Adelaide	4	146.4	147.0
VK6RAP	Perth	1	146.1	146.7
VK6RAA	Albany	2	146.2	146.8
VK7RAA	Mt Barrow	4	146.4	147.0

b. Repeater installations are also planned for the following areas.

VK2	Lismore	4	146.4	147.0
	Coffs Harbour	2	146.2	146.8
	Pt Macquarie	1	146.1	146.7
	Blue Mountains	7	146.35	146.95
	Ulladulla	3	146.3	146.9
	Wagga Wagga	5	146.15	146.75
VK2—*	Engadine	2	146.2	146.8
(VK3RNE)	N.E. Victoria	4	146.4	147.0
VK3RMV*	Swan Hill	3	146.3	146.9
(VK3RBA)	Ballarat	5	146.15	146.75
(VK3RMM)	Mt Macedon	6	146.25	146.85
(VK3RAP)	Hamilton West	1	146.1	146.7
VK3REG*	East Gippsland	3	146.3	146.9
VK4	Sunshine Coast	—	—	—
	Rockhampton	—	—	—
(VK5RAA)	Pt Pirie	1	146.1	146.7
VK6RAH*	Perth	2	146.2	146.8
	Wagin	4	146.4	147.0
	Kalgoorlie	—	—	—
VK7	Hobart	1	146.1	146.7
	Loana	—	—	—

## SUGGESTED WIA UNDERTAKING

The future of amateur radio societies, in particular the WIA, and the financial difficulties being experienced, has spurred at least one amateur, Don Watson, VK4DZ of Townsville, Queensland, to put forward a sound proposal.

Extracts from a letter he wrote to the Council, Qld Div, WIA (copies to WIA Federal Executive, all federal councillors, and the editor of "AR") are given

here, as, to quote Don, "... the proposal must have the widest possible spread among the amateur fraternity in Australia. This includes non-members of the WIA.

"I have read with interest and concern the various reports in 'QTC' and 'AR' on the state of the Institute's finance.

"The problem, being a national one, is considered on a national scale rather than a divisional one. The problem itself is a simple one—the WIA has a deficit of some \$16,000. The cause is equally simple—the WIA exists to provide a service for its members' (AR May 1975).

"The effects of inflation cannot be countered by operating on a fixed budget drawn up some eight months before the Institute's financial year. This can only be done if, as in any trading organisation,

Radio clubs and other organisations, as well as individual amateur operators, are cordially invited to submit news and notes of their activities for inclusion in these columns. Photographs will be published when of sufficient general interest, and where space permits. All material should be sent direct to Pierce Healy at 69 Taylor Street, Bankstown 2200.



# CALCOMP AUDIBLE CONTINUITY TESTER

**SAFE**

**LIGHTWEIGHT**



**EFFECTIVE**

**COMPACT**

- ★ Replaces buzzer and bells and danger of inductive kickback
- ★ Audio tone varies with resistance (0 to 50 OHM)
- ★ Open circuit 9V at the probes
- ★ Short circuit current 6mA
- ★ Fits your hand and your tool box
- ★ Safe for semiconductors
- ★ Measures only 70mm x 35mm x 95mm

\$12.93 including sales-tax plus P & P \$1.00

**AUSTRALIAN TIME EQUIPMENT PTY LTD**

192 Princes Highway, Arncliffe, N.S.W. 2205

Phone: 59 0291

## BRIGHT STAR CRYSTALS PTY LTD

35 EILEEN ROAD, CLAYTON, VICTORIA. 546 5076



### ATTENTION!!!!

All constructors of Electronics Australia projects  
**BRIGHT STAR CRYSTALS PTY.LTD.**



Have for prompt delivery **ALL CRYSTALS** for past and present projects, including September's Quartz Crystal Drive Unit for clock, 3276-8 KHz "D" spec. GGDF. (See E.A. Sept '75 page 74).



With more than 36 years experience **BRIGHT STAR** can supply **ALL** your Crystal needs.

**ALSO AVAILABLE**

- \* Wideband Amplifiers.
- \* Crystal Oscillators.
- \* Crystal Clock and Decade Counters. C-MOS, TTL.
- \* Pre Scalars to 250MHz. (See previous advertisements.)
- \* Send S.A.E. for new catalogue.



**W. J. MONCRIEF PTY. LTD.**  
PERTH. PHONE 25-5722, 25-5902

**ROGERS ELECTRONICS**  
ADELAIDE. PHONE 64-3296, 42-6666

**FRED HOE & SONS PTY. LTD.**  
BRISBANE. PHONE 47-4311

**PARIS RADIO ELECTRONICS**  
SYDNEY. PHONE 31-3273

**DILMOND INSTRUMENTS HOBART. PHONE 47-9077**

## AMATEUR BANDS

increasing costs are passed on as they occur. In its present form the WIA has nowhere to pass these costs, other than to its members in the form of increased subscriptions or levies. The only profitable side of the Institute's activities has been the sale of publications. It would be pretty unreasonable to expect this facet of operations to be able to cope with a \$16,000 deficit, nevertheless the lesson should be sufficient to bring home the fact that the Institute can only hope to meet the costs of the services sought by members if it can increase its income by means of a trading subsidiary.

"I doubt that the investigation to be undertaken by VK3ZBB into 'the whole of the systems and services of the Institute from top to bottom' will arrive at any worthwhile recommendation for reducing expenditure, and agree with the comment in the Executive Annual Report 'that if the office is to provide the service to the Institute that council expects of it then there is a limit to the economies which we can apply'.

"With this in mind, therefore, it is suggested that the WIA implement the incorporation of a wholly owned trading subsidiary. If the proposal is contrary to the WIA constitution, then amend the constitution to provide for it.

"At present the WIA has a membership of some 4500. There are some 6850 licensees. The advent of novice licensing will probably raise this number to 8000 within twelve months. The WIA serves the interest of all licensees, whether members or not, yet it gains no financial benefit from the business generated by these licensees. I recollect a survey undertaken some four or five years ago (or was it longer?) which indicated that each amateur spent an average of \$15 per head per year on miscellaneous equipment (excluding one major purchase such as transceivers). No doubt the figure would be higher due to the effect of inflation, but 8000 x \$15 gives a sales potential of \$120,000 pa, plus major equipment. It would be foolish to suggest that the whole market could be captured by anyone, but nevertheless there is room for the Institute to enter the market, and to gain some financial benefit from the activities of its members.

"It is realised that the proposal may run contrary to the vested interest of those divisions which undertake a form of trading activity, and indeed contrary to the interest of quite a few members themselves. Nevertheless, the financial future of the Institute is equally as important as that of divisions and individual members, and any argument to the contrary should not be allowed to sway a decision.

"The project will need capital. This could be raised by the sale of shares to members and or by debentures. If 4500 members were to contribute an average of \$20 per head in shares or debentures this would raise \$90,000. Easily said, not so easily raised. The idea would need to be sold to members on the basis that a successful operation would allow a reduction in the present annual subscription rate, as well it could. Better an investment than a yearly contribution.

"The project, if it is to get off the ground, would need to be able to compete with other dealers and indeed offer incentives to members or shareholders by way of discounts. This would induce further membership from non-members, thus contributing to Institute revenue.

"The WIA, by virtue of its connections, should be able to arrange agencies for sale of almost every brand of equipment, and whilst at the outset activities may be limited to amateur radio lines, it should be the aim to extend generally into the field of electronic equipment. This in fact would be highly desirable even at the outset, as it would be difficult to hold and defend a small segment of the electronic market when competitors have advantages accruing from profitable volume sales in the whole field.

"Without a commercial means of revenue the Institute faces bankruptcy in the foreseeable future. With this in view, it is considered that there is scope for the WIA to participate in the market which it serves to protect, and to compete profitably to such an extent that the cost of services provided to mem-



bers can be covered to the mutual benefit of the Institute and its members."

A point to note is that Don Watson is well qualified to analyse and advise on such a problem. In his work-a-day life he is in close touch with the world of finance which deals with far greater amounts than the WIA or any other amateur radio society would expect to become involved in.

Therefore, the proposal merits deep consideration and positive investigation.

What is your considered opinion?

## RADIO CLUB NEWS

### UNSWARS CHRISTMAS VACATION ACTIVITIES

To assist interested persons to obtain a novice licence, the University of NSW Amateur Radio Society has arranged a program of study activities.

There being no minimum age limit set for the novice licence, all ages will be catered for. Encouragement is also being given to the participation by ladies in the study groups.

Activities will cover theory, regulations and Morse code practice. A study of the social and cultural aspects of amateur radio, practical constructional projects and field excursion trips will also be included.

The first meeting will be held on Saturday 13th December, 1975 at the Wireless Institute Centre, 14 Atchison Street, Crows Nest (near St Leonards Railway Station) at 7.00 pm. Assistance will be given to solve transport difficulties.

Activities will normally take place from 6.00 pm to 9.00 pm each Tuesday, Thursday, Friday and Saturday concluding on 26th January, 1976.

The only fee involved is \$5.00 to cover printed material.

All activities are on a voluntary basis and assistance from those interested in helping will be welcome.

No previous knowledge of radio theory is necessary to attend the classes. Enrolment may be made at the first meeting it is convenient to attend. Those wishing to assist should write to the University of NSW Amateur Radio Society, Vacation Activities Group, The Union Box 57, PO Box 1, Kensington, NSW 2033.

**WAGGA DISTRICT RADIO CLUB:** At the annual general meeting of the Wagga District Radio Club the following office bearers were elected: President, John Eyles VK2YCM. Vice-president, Warren Williams VK2ZGN. Secretary-treasurer, Jeff Lane. Committeemen, Sid Ward VK2SW. Doug Meneke, VK2ZMP. Jeff Brill.

For details of club activities contact Jeff Lane, 274 Lake Road, Koorlingal, NSW 2650. Telephone (Bus) Wagga 211833.

**MOORABBIN AND DISTRICT RADIO CLUB:** At the August general meeting of the MDCR there was good news on the proposed combined club rooms.

The Moorabbin Council has set aside an additional \$20,000 for the building. That amount, plus the \$46,000 allocated in 1974, plus the \$7500 contributed by the combined clubs, makes a total of \$73,500.

It is understood that building plans have been finalised and tenders for the construction would be called for before the end of August. It is anticipated that the new building will be completed early in 1976.

**EASTERN ZONE VICTORIAN DIV. WIA:** The annual meeting of the Eastern Zone was held on 30th August, 1975 at the Gippsland Institute of Advanced Education, Churchill. The activities of the zone during the past twelve months was outlined in a report by the president Ted Allchin, VK3YGI. These included the promotion of amateur radio through the Central Gippsland YRCS at Traralgon and Traralgar also at Warragul under the Adult Education Scheme. It was reported that 25 candidates are ready for the first novice licence examination.


Ted also reported considerable activity in updating and resiting the Latrobe Valley repeater and the construction of the East Gippsland repeater. The Eastern Zone hookup on 3650kHz each Sunday night at 2030 hours has continued with various stations taking part.

It was announced that Gregor Cox, VK3ZGC, was

## IONOSPHERIC PREDICTIONS FOR NOVEMBER

Reproduced below are radio propagation graphs based on information supplied by the Ionospheric Prediction Service Division of the Department of Science. The graphs are based on the limits set by the MUF (Maximum Usable Frequency) and the ALF (Absorption Limiting Frequency). Black bands indicate periods when circuit is open.

11.75

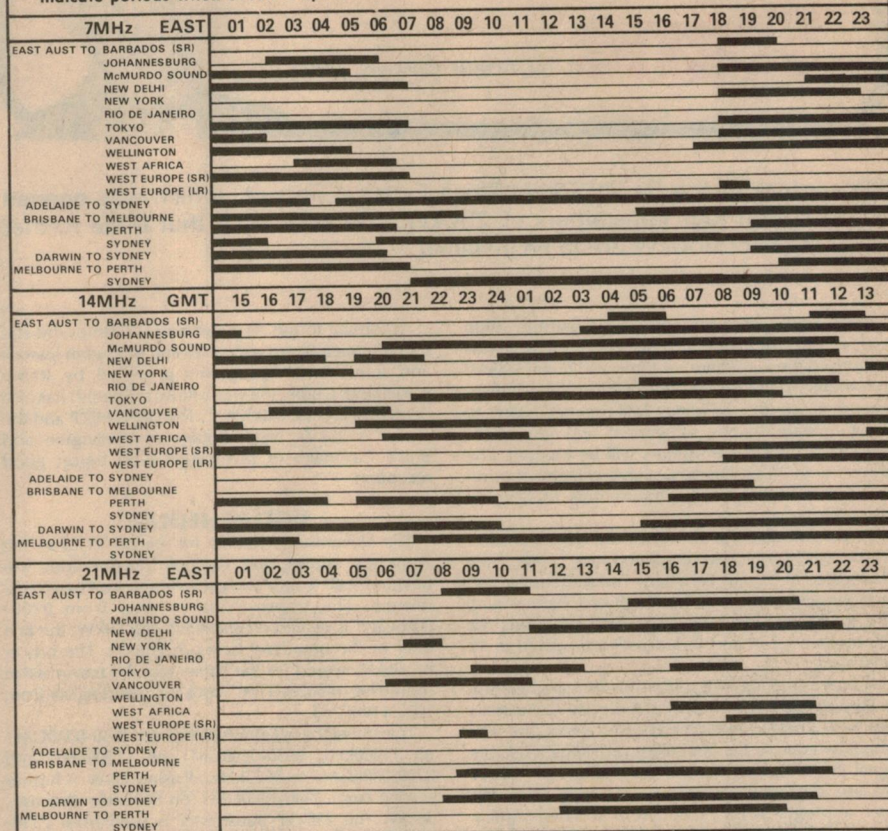

the winner of the 1975 Eastern Zone Activity Award. Other subjects discussed were the Wildcat DX Award; the Eastern Zone Newsletter; working bees for the Latrobe Valley repeater; testing of the East Gippsland repeater on channel 3 and the Morse code practice sessions each Tuesday evening.

Office bearers elected for the coming year were: President, Ted Allchin VK3YGI. Vice-president, Bruce Hocking VK3ADB. Secretary-treasurer, Harold Hardy VK3YGI. Repeater Officer, Graham Colley VK3QZ. Activities & Publicity Officer, Bob Sherlock VK3APV. Station Officer, David Scott VK3DY. Asst Station Officer, George Francis VK3HV. WICEN Co-ordinator, Keith Scott VK3SS.

Guest speaker for the evening was Mr Paul Strickland, spokesman for the Gippsland Institute of Advanced Education newly-formed FM broadcasting group. Paul outlined the function of the station, which will broadcast fine music, educational and public access programs. Amateurs in the area were invited to assist in the construction and provide technical assistance in the operation of the station. Being a non-profit organisation, Paul explained that donations of equipment or money would greatly assist the project.

### SIGNAL CORPS JUBILEE

The 50th anniversary celebrations of the Royal Australian Corps of Signals, will be held throughout Australia from 3rd to 10th November, 1975. Members of the 2nd Signal Regiment will install and operate an amateur station at Watsonia Barracks, Melbourne during that period.

A display of army signals equipment will be open for public inspection on the 8th and 9th November. The Governor General will open the display on the 8th.

The amateur station, under the supervision of full call licensees and manned by members of the Signal Corps, will operate from 3rd to 10th November inclusive. The call sign specially allocated for the

occasion is AX3SIG and will be used only for the duration of the celebrations. The station will be operated for 24 hours each day on all HF amateur bands from 160 metres, and on two metre simplex and repeater channels for VHF operators in Melbourne.

Standard service equipment will be used in the station installation. Among the supervisors holding amateur licences will be Lt John Loftus, VK3QK, Lt Col John Bennett, VK3ZA and Surgeon Captain Jim Lloyd, RAN, VK3CDR.

The station will run 50 watts AM on 160 metres and 400 watts upper side band on all other HF bands. CW will also be used and it is hoped that RTTY will be used.

A special QSL card has been printed and it is hoped that world wide contacts will be made. The station will be part of an amateur hookup of signal corps divisions throughout the world.

## SO YOU WANT TO BE A RADIO AMATEUR?

To achieve this aim, why not undertake one of the Courses conducted by the Wireless Institute of Australia? Established in 1910 to further the interests of Amateur Radio, the Institute is well qualified to assist you to your goal. Correspondence Courses are available at any time. Personal classes commence in February each year.

For further information write to:

**THE COURSE SUPERVISOR,  
W.I.A.  
14 ATCHISON STREET,  
CROWS NEST, N.S.W. 2065**



# Shortwave Scene

by Arthur Cushen, MBE



The success of the Radio South Africa External Service, which was opened in 1966 with four transmitters of 250kW, has been such that three further transmitters of 500kW are to be installed.

Radio South Africa has announced that the South African Broadcasting Corporation (SABC) has authorised the installation of three additional 500kW transmitters at the HF Verwoerd Transmitting Station. Extensions to the buildings will be necessary to accommodate the new equipment, and new antennae arrays for the transmitters will be erected. The project is in its preliminary stages and thus far, no date has been set for the transmitters to become operative.

At present Radio South Africa uses four transmitters of 250kW, which were opened May 1 1966. They are located at the HF Verwoerd Transmitting Station at Bloemendal, some 45km south of Johannesburg. The transmitters are operating with programs for 156 hours a week and broadcasts are carried in 10 languages.

As well as serving Africa, transmissions are beamed to Europe and North America. A service to Australia and New Zealand operated for four years, but was withdrawn due to the difficulties providing a reliable signal into this area. Several transmitters of 100kW are also located at Bloemendal and these carry the internal programs for reception in Southern Africa. The tropical bands are used for this purpose.

We visited the transmitting site in 1969 and found it to be one of the most modern in the world. At that time a huge new studio building was being built at Auckland Park, a Johannesburg suburb, and this is now complete and houses the radio and television services.

The SABC has 19 different program services which cover English, Afrikaans, and the Bantu languages. Some 86 stations operating on FM provide most of this service.

## VOICE OF MALAYSIA

A powerful signal from the Voice of Malaysia at Kuala Lumpur has been heard on 15275kHz with an English transmission to 0850GMT. The broadcast is on the air from 0625GMT on 15275kHz and 6175kHz. According to the closing announcement the transmission continues in Indonesian on 6175kHz up to 1600GMT.

Our reception on 15275kHz has included the interval signal up to 0900GMT and then a program in Indonesian. It is understood that a new high-powered 500kW transmitter has been installed in Sabah, and this could be the reason for the stronger signals on this frequency.

## NEW BOGOTA FREQUENCY

Radio Nacional at Bogota Colombia has been heard on 15335kHz with a relay of the Nacional program around 0200GMT. This frequency, previously inactive for some months, is giving good reception in New Zealand until close down at 0400GMT. On Mondays the program consists of classical music with a three note chime at 0200GMT and full station announcement.

Notes from readers should be sent to Arthur Cushen, 212 Earn Street, Invercargill, NZ. All times are GMT, add 9 hours for West Aust. Summer time, 11 hours for East Aust. Summer time and 13 hours for NZ Summer time.

According to the New Zealand DX Times the station has been heard with a session of English lessons and transcription programs provided by Radio Nederland. During the week news in Spanish has also been observed at 0200GMT. The call is HJZP and the power is 20kW. Nigel Robins of Wellington and Bruce Cavanagh of Invercargill both report good reception.

## KGEI SCHEDULE

The November schedule for station KGEI at San Francisco shows that Gospel transmissions are beamed both to Asia and Latin America on two transmitters. The transmission to Asia from 0700-0900GMT is carried on 5980kHz with 50kW, the first hour of the broadcast being in English. The power of 250kW is used for the balance of the transmission from 0900-1400GMT on 5980kHz, with English from 1000-1100GMT.

Transmissions to Latin America are 2130-0030GMT on 15280kHz, 0030-0200GMT on 11905kHz, and 0200-0700GMT on 9615kHz, all using 50kW. A further service from 0900-1500GMT on 9615kHz also uses 50kW. The 250kW transmitter is used from 2330-0100GMT on 15355kHz, and carries German and Spanish programs beamed to Latin America. The station address is: Radio KGEI, Box 15, San Francisco, California, 94063.

## SW CLUB ENDS

The Radio Canada Short Wave Club was terminated this month after being on the air for the past 14 years. The broadcast carried on a Saturday evening transmission was originally conducted by Basil Duke, but in later months has been compered by Ian McFarland. In addition, the club produced a bulletin for its members and, over the years, broadcast several interesting series, including one on foreign station identification and another on the different types of interference.

Another session to be withdrawn on November 2 was the Listeners Corner, which has also been a long running program and best remembered by its comper, Earle Fisher. This was broadcast on Sunday evenings, but in recent months was part of the Saturday broadcast being featured with the Short Wave Club.

## MAJOR BRAZILIAN CHANGES

There has been a tremendous increase in the number of stations in Brazil in the past few years, and this has forced the authorities to make many frequency changes for stations using the lower channels in the 90 and 60 metre bands. It has also been announced, according to the BBC Monitoring Service, that Brazil is undergoing a massive change in broadcasting with the licensing of 379 additional stations, bringing to 1170 the number of medium-wave broadcasters operating out of 861 cities.

Radio Nacional de Brasilia has only one 250kW transmitter in operation, and it is beamed to Europe only. A second transmitter has arrived from Switzerland, and will be used for North American broadcasts. The broadcast to Europe continues to be well received on 15245kHz with English from 2100-2200GMT. The address of Radio Nacional de Brasilia is PO Box 07/0173, Brasilia.

## INDONESIAN NEWS

The interest in signals from Indonesia is shown by the reports of many readers who are hearing stations from this part of the world. RRI Kupang, Timor has been heard on 3385kHz after 1400GMT when the Papua-New Guinea station Radio East New Britain leaves the frequency. RRI Palangkaraya, has been heard by Craig Tyson, Wembley, WA, with station identification at 1333GMT on 3905kHz. Our reception at this time showed the station to be carrying a program of light classical music on Sundays.

RRI Fak Fak, using 4789kHz has station announcements at 0958GMT. RRI Sibolga, is reported on 5260kHz in "Down Under DX News" as operating on this frequency from 1000-1600GMT. RRI Pekanbaru, has been heard on 5886kHz closing at 1558GMT. The same program is carried on 5205kHz and the schedule is 1000-1600GMT.

## MEDIUM WAVE NEWS

**PHILIPPINES:** The new 250kW transmitter of the Far East Broadcasting Company at Iba, Zambales, in Northern Luzon has been heard on 1470kHz at 1400GMT. This station broadcasts to Hong Kong, South China and South East Asia. The signal at our location was fair, but we are receiving it on the back of the beam, and as well there is considerable interference from Chinese and Thai stations on the same frequency. The program consisted of recorded Gospel music with announcements in Chinese. Reports should be sent to the Far East Broadcasting Company, PO Box 2041, Manila, Philippines.

**QATAR:** According to the BBC Monitoring Service the new station in Qatar on 952kHz uses the power of 750kW. Reception is possible around dawn. The station is located at Al-Quraysh in the northern coastal area.

**AUSTRALIA:** Further expansion of medium-wave and FM services in Australia was recently announced, and this includes plans for nine FM stereo stations and three medium-wave stations. The medium-wave stations are to be licensed to universities and other institutions of learning on a twelve month experimental basis, according to DX Post of Adelaide.

The medium-wave stations are to be given to: Darling Downs Institute, Toowoomba; the National University, Canberra; and the West Australian Institute of Technology. The stations, mainly in provincial regions, will provide adult and teacher education programs, as well as cultural broadcasts.

## LISTENING BRIEFS EUROPE

**MALTA:** Broadcasts from Malta on 9755kHz have been heard at 2045GMT on Saturdays. These are beamed to the United Kingdom, using the transmitter of Deutsche Welle. The station was also heard to carry Gospel programs for the Voice of Hope and Ibra Radio after 2100GMT, and it is thought that these are aimed at Portugal where there have been serious political disturbances.

**GERMANY:** According to "Sweden Calling DXers," broadcasts from RIAS, Berlin, on 6005kHz are now from two different transmitter locations—at 0325-1730GMT from a 20kW transmitter in West Berlin, and at 1730-0315GMT from a 100kW transmitter in Munich. This change took place recently. Reception reports are requested, and will be verified by a card with a picture of the station.

## ASIA

**THAILAND:** Radio Thailand, Bangkok has been heard on 9655kHz with an English announcement at 1024GMT prior to commencing their external service. Craig Tyson, of Wembley, WA, reports fair reception of this transmission.

**KOREA:** Recently we reported reception of a Korean signal opening at 0900GMT on 6348kHz, with news at 1000GMT. This signal was first noted by Steven Greenyer of Invercargill. According to a listener in Japan, the station is known as 'Radio Echo of Hope.' It has no connection with the former Korean Army Station 'Voice of Hope,' and is presumed to be broadcasting from South Korea. The present schedule is: 0200-0500GMT, 0900-1200GMT, and 1230-1530GMT, all on 6348kHz.



# HERES PROOF!

THAT EDGE ELECTRIX HAVE THE BEST PRICES  
on AKAI HI-FI [AND MORE] ....

## AKAI TURNTABLE AP002

Incredible low price belt driven semi-automatic quality 4 pole synchronous motor light feather touch. Wow and flutter 0.08%. Ston ratio 48 dB. \$54.00 off.



LIST PRICE  
\$189.

OUR  
PRICE  
\$135.

## AKAI TURNTABLE AP003

No.2 in the AKAI range Semi automatic belt drive slimline design-brushed aluminium surface. Wow and flutter 0.05%. Signal to noise ratio 52 dB. At \$176. That's \$59.00 below recommended list.




LIST PRICE  
\$235.

OUR  
PRICE  
\$176.

## AKAI SPEAKERS SW42

This magnificent design produces a bass sound equivalent to a big system 6.5 inch woofer and 2 inch tweeter. You won't believe the sound or our discounted price.



LIST PRICE  
\$162.

OUR  
PRICE  
\$122.

## AKAI CASSETTE DECK GXC-36D

Usual beautiful AKAI quality with the AKAI GX head. Wow and flutter 0.12% wrms. Signal to noise ratio better than 48 dB. Pause control — O.L.S. and chrome low noise functions with a price \$70 below recommended list.



LIST PRICE  
\$289.

OUR  
PRICE  
\$219.

## AKAI CASSETTE DECK GXC -75D

The masterpiece, Dolby-auto distortion reduction O.L.S. function, unique reverse system with mode selector. If you're looking for the best — this is it \$108 off the recommended list.




LIST PRICE  
\$498

OUR  
PRICE  
\$390

## AKAI AMPLIFIER AA5210

AKAI'S lowest priced AMP. Rated at 15 watts RMS a side. 8 to 100,000 Hz  $\pm$  0 dB — 3 dB. Beautifully styled with brush aluminium face and the usual AKAI high quality.



LIST PRICE  
\$215

OUR  
PRICE  
\$163

## AKAI TUNER AMPLIFIER AA810

The latest tuner AMP 10 watts RMS per channel — frequency response 20-60000Hz. Superb AM and FM stereo reception with all the class of the big AKAI tuner amps. \$60.00 off.



LIST PRICE  
\$245

OUR  
PRICE  
\$185

## CORAL SPEAKER KITS



OUR  
PRICE  
\$77

12" 4WAY  
PAIR  
12SA1  
10" 3WAY  
PAIR  
10SA1



OUR  
PRICE  
\$55

Why pay \$200 to \$300 for a 4 or 3 way pair of top class speakers? Here's what to do — buy the kit (pair) complete with all bits and make or buy your own cabinets. They really sound good!

## PHILLIPS 8" 2 WAY SPEAKER SYSTEM COMPLETE WITH CABINETS AD8K40



OUR PRICE  
\$109 Pair

All you need is a screwdriver to assemble this pair of Philips speakers, 12" x 18" cabinets supplied — 40 watts RMS a side, 8" woofer and a Philips dome for each. The sound? Everyone knows how good Philips speakers are!

BLANK TAPE... BLANK TAPE... BLANK TAPE... BLANK TAPE... BLANK TAPE...

## CASSETTES

HITACHI	1	12	24	MEMOREX MRX2	TDK		
C60 LN	1.60	1.47	1.33	1	12	24	
C90 LN	2.20	2.00	1.80	C45	2.10	2.00	1.90
C120 LN	2.95	2.80	2.65	C60	2.30	2.15	2.00
CDC 60	2.35	2.14	1.93	C90	3.20	3.00	2.80
CDC 90	3.10	2.90	2.60				
CDC 120	3.95	3.80	3.65				

## CONCORDE

	1	12	24
C60	1.20	1.10	1.00
C90	1.60	1.50	1.40
SONY			
C90 LN	2.55	2.25	2.05

## HITACHI REEL TO REEL

	1	5	10
AL7 7" x 1800'	7.50	7.00	6.50
EL7 7" x 1200'	6.50	6.00	5.50
ED7 7" x 2400'	8.50	8.00	7.50

**EDGE ELECTRIX** Pty.Ltd.  
31 BURWOOD ROAD  
BURWOOD N.S.W. 2134  
TELEPHONE: 747-2931

PLEASE RUSH ME ..... ENCLOSED  
IS MY CHEQUE FOR ..... +\$5 P&P  
PLEASE FORWARD INFORMATION ON.....  
NAME .....  
ADDRESS .....  
.....  
..... Post Code. ....



**SOCKET SPANNER SET**

32 piece metric brand new 1/2", 3/8" + 1/4" drive ratchet ext bar, T bar plug spanner etc in metal case only \$5.95 set. Post A 95c, B \$1.10, C \$1.25, D \$1.35.

**CIRCULAR SLIDE RULE**

Concise model no. 300 4 1/2" in diameter. Will do the same work as the conventional slide rule. Instruction book included. P & P 20c. \$4.50 each

**P.M.G. TYPE TELEPHONES**

Standard desk type with magneto bell calling device, Range 30 miles. Uses standard batteries at each phone. Any number can be connected together on single line.

**\$35.00**

(2 TELEPHONE SETS)

\$1 cartage to rail. Freight payable at nearest attended railway station.

**ALTIMETERS**

Sensitive type ex Air-Force, made by Pioneer USA. \$37.50. Post: A \$1.50, B \$1.60, C \$1.95, D \$2.75.

**TEN CHANNELS VHF TRANSCEIVER**

Types TR 1934 100-125 MHz and TR 1936 125-150 MHz. 28 volt DC operated AM single crystal locks both TX and RX on same channel complete with generator. **\$33.00**

**MINIATURE ELECTRIC MOTORS**

1 1/2 to 3 volts DC. Ideal for model boats, cars, planes, etc. Strong torque. Only

75c each or 10 for \$5  
P & P 20c ea. or 10 for 55c.

**FREQUENCY METERS**

AN URM 32 A 120 KHz to 1000 MHz, with two 40V power supply, \$125.00. \$1.00 cartage to rail, freight payable at nearest attended railway station.

**ILFORD 17.5 mm SPROCKETED MAGNETIC TAPE**

1000 ft reels brand new original packing **\$4.00 ea.** quantity available

Post A 79c, B \$1.20, C \$1.40, D \$1.70

**No. 62 TRANSCEIVER**

With headphones, accessories etc. **\$60.**

**TELEPHONE WIRE**

1 mile twin (2 miles) genuine ex-Army Don 8 perfect condition \$35 per reel \$1 cartage to rail freight payable at destination.

**PRISMATIC COMPASSES**

Genuine ex-army Mk 3, liquid damped, as new **\$35.00** P & P \$1.05

**MORSE KEY | MORSE KEY BUZZERS**

**\$1.40** **\$4.25**  
Post 20c. Post 55c.

**HALF INCH RECORDING TAPE**

Top Grade 2400' on 10 1/2" reels. Ideal Video Experimenting. Only **\$3.50**

P & P A. \$1.55, B \$1.60 per reel.  
C. \$1.95, D. \$2.75.

**UNI-SELECTORS**

4 bank 25 position **\$4** each.  
P & P A. 70c, B. 85c, C. \$1, D. \$1.10.

**ADLER FREQUENCY METER**

100KHz 20MHz **\$95**

**4 DIGIT RELAY COUNTERS**

50 volt DC, suit slot car Lap counters, etc.

**\$1.25** each. P & P 30c.

**NIBBLING TOOL**

Cuts sheet metal like a punch and die, trims, notches and cuts to any size or shape over 7/16inch.

ONLY **\$9.95**

Post 55c

**NIFE CELLS**

1.2 Volt, fully charged, 4in x 3in x 1in 4 AH.

**\$1.50** each P & P 30c.

**BC221**

Frequency Meters.

**\$35.00**

**HANDY SIGNAL INJECTOR**

Produces an Audio Signal in rich harmonics. Ideal for Sig Tracing in A.F., I.F., and R.F. circuits. Powered by 4 Penlight Batteries with On-Off Switch and indicator lamp. Size 1 1/2" Diam. 5" Long. Only

**\$6.50** Post 55c

**P.M.G. TYPE KEY SWITCHES.**


**45c** P & P 20c

**TELESCOPES ZOOM FOCUSING**

25 x 30 **\$19.95** — 40 x 40 **\$28.95**

50 x 50 \$37.50. 60 x 60 \$75.00 as illustrated.

P & P A. \$1.45, B. \$1.60, C. \$1.75, D. \$1.85.

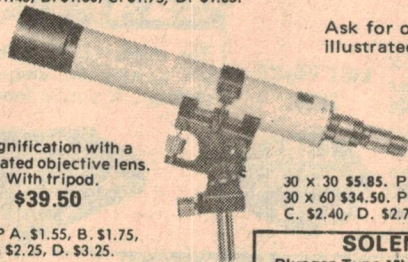

60 magnification with a 60mm coated objective lens. With tripod.

**\$39.50**

P & P A. \$1.55, B. \$1.75, C. \$2.25, D. \$3.25.

**WALKIE TALKIES**

2-way radio, 7 transistor, PMG approved, set of 2 only **\$49.50**

1 watt, 11 transistor \$130.00 set of 2.

P & P A. \$1.45, B. \$1.60, C. \$1.75, D. \$1.85.

**SMALL COMPUTER PANELS**

3in x 2in containing 2 valves, qty. of resistors, etc.

ONLY **75c** P & P 30c.

**ELECTRONIC FREQUENCY COUNTER**

Austronic type DFC-4 240V 50 cycle 0-100KHz **\$150**

**IMPELLER PUMPS**

New gunmetal body, Stainless Steel Shaft. Neoprene Impeller. Up to 15ft. Lift, suitable for almost any type of liquid. Self priming. Ideal boat bilge pump, sillage drains, etc. Approx size 8" x 5"

3/4" **\$21.00**

1/2" **\$26.50**

3/4" **\$28.95**

P & P A. \$1.45, B. \$1.60, C. \$1.75, D. \$2.

**RECEIVER No. 210**

2-16 M/cs. **\$65.**

Transmitter No. 11 suits 210 **\$35.**

24 volt Power supply to suit above **\$15.**

Or complete station with Headphones, Mic, Morse Key, Antenna **\$110.**

**CASSETTES**

C60 Low Noise Cassettes

**\$1.20**

C90 Low Noise Cassettes

**\$1.75**

Post 33c.

522 Transceivers 100-150M CS

**\$35.00**

5" CRO TUBE 5 BPI **\$5.50** each.  
Post: A 85c, B \$1.10, C \$1.25, D \$1.35.

**POSTAGE KEY:**

A: N.S.W.  
B: Vic, Qld, S.A.  
C: Tas.  
D: W.A., N.T.

**VALVES**

BRAND NEW IN CARTONS

807	\$1.50	CV850	\$1.50
65N7GT	95c	1H6G	75c
5U4G	95c	832	\$5.00
EF50	75c	6AG5	80c
5Y3	\$1.99	6X4	\$2.25
2x2	75c	VR64	75c
		VT4C	75c

P & P 30c

**PARABOLIC REFLECTORS PYREX MIRROR**

36" dia. Ideal solar radio optical experimenting also decorating purposes. \$37.50 Sorry shop sales only.

**RADAR TRANSCEIVER X BAND WITH KLYSTRON ETC. \$45.00**

Ask for our illustrated leaflets

30 x 30 **\$5.85**. P & P 55c.  
30 x 60 **\$34.50**. P & P A. \$1.79, B. \$2.20, C. \$2.40, D. \$2.70.

**SOLENOIDS**

Plunger Type 12V 300MA. Suit electric camera control, miniature trains, radio, etc.

**\$2.50** P & P 20c

200 MA 24 volt, 1/2in push movement.

**\$2.50** P & P 20c.

**SELSYN MOTORS MAGSLIP**

Md. 11. **\$5.25** ea.  
No. 19 TWO-WAY RADIOS.  
Power supply, accessories, etc., **\$35.**

**BINOCULARS**

PRISMATIC Coated Lenses. Brand new. Complete with case.

7 x 35 Wide Angle. **\$35.50**

8 x 40 Wide Angle. **\$39.50**

7 x 50. **\$31.50**

10 x 50. **\$32.50**

12 x 50. **\$33.65**

20 x 50. **\$37.95**

P & P A. \$1.45, B. \$1.60, C. \$1.75, D. \$1.85.

**3000 TYPE RELAYS**

P.M.G. 200Ohms — 1'500Ohm Coils **\$2.50** each. P & P 30c.

**SPY TELESCOPES**

8 x 17 mag size of a rifle cartridge extends to 8". Only **\$3.50** each, post 55c.

Cintel Oscillator and Electronic Counter, type 388. **\$250**

SPECIAL lucky dip valve offer, 15 new valves in cartons for only **\$2.95**. We haven't got time to sort them, so you reap the benefit.

P & P A. 60c, B. 85c, C. \$1, D. \$1.10.

**CONDENSER LENS**

1 1/2" Diam 4 1/2" F.L. **75c.**

P & P 20c

**MULTIMETER**

A compact and handy tester for workshop or lab where quick circuit checks are required  
DC Voltage 5-2.5K (20,000 OHMS per volt) AC Voltage 10-1000V (10,000 OHMS per volt) DC Current 0-50 UA. 0-2.5 MA, 0-250 MA. Resistance 0-6 Megohms. Capacitance 100 UUF to 1UF. Decibels — 20 to plus 22 DB. Complete with instructions.  
Only **\$15.95** ea. Post **\$1.05**.

**EX ABC RECORDING TAPES TOP BRANDS**

1/4" x 1200' on 7" reels. **\$2.50**

P & P A. 72c, B. \$1.05, C. \$1.15, D. \$1.30

**Panoramic Adaptor**

E.M.I. type PRA-1 455 variable KC. Course 440-520 Kc. Centre Freq. 520-440 Kc. Fine centre Freq. 20-0-20. Filter band width 50, 100, 200. L.F. 200. H.F. Sweep band width 0-200.

**\$75.00.**

**CONDENSER LENS**

2 1/2in DIAM. 2in FL. **\$1.50** each. Or **\$2.50** per pair. P & P 20c.

**TRANSCEIVERS****Ex Army**

No 10 set, 38 to 55MHz with hand piece **\$22.50**. Battery to suit **\$3.50** extra.  
No C42 set, 36 to 60 MHz complete with 24V power supply, headphone, mic, leads etc **\$65.00**.  
No C45 set, 23 to 38 MHz complete with mast, headphones, mic 24V power supply etc. **\$95.00**.  
\$1.00 cartage to rail, freight payable at nearest railway station.

Hartley double beam oscilloscope. Type 13A with probes.  
Working **\$150.00**

77D x RCA STUDIO RIBBON MICROPHONES Variable pattern & response music or speech. **\$80.00** ea. Post A \$3.30 B \$4.00 C \$4.30 D \$4.80.

**COMMUNICATIONS RECEIVER**

TCA R5223 Communications Receivers. These receivers don't cost as much as a R390 A or a RACAL but give you the opportunity of having a unit with a similar performance at a fraction of the cost. Continuous tuning from 1.5 to 30.5 Mhz. bands. First conversion is crystal locked into a 2.5 to 3.5 Mhz tunable second IF. 1 uV sensitivity. Drift from switch on to fully warmed up less than 3 Khz. Dial reset to less than 1 Khz. Calibration to within 3 Khz. (typically within 1 Khz.). Operation from 240V, 110V AC or 24V DC with inbuilt power supplies. 19 inch rack mounting. Accepts coaxial 50 or 75 ohm antennas. Diversity operation possible IF output for panadaptors etc. Complete with leads, headphones a bargain at **\$295.00** Cartage to rail \$1. Freight payable at nearest attended railway station.

**ALLIGATOR CLIPS**

Sets of two with 14" connecting wire. 5 sets for **\$1**. Post 24c.

**Deitch Bros.**  
**70 OXFORD STREET, SYDNEY 2010**

SORRY. NO C.O.D.



# INFORMATION CENTRE

**QUADRADISCS:** I am writing regarding Quadradiscs. Can they be played on a stereogram and a 4-channel gram without damaging needle, record or record player?

On the cover of Quadradiscs they state Compatible with Mono and Stereo but I want to know about playing it also on 4-channel matrix. (G. R., Kadina, SA).

● CD-4 discs can be played on any equipment using a cartridge of high compliance. Any cartridge with a playing weight of more than 2 grams will cause undue wear of the high frequency carrier after only a few playings and will thus render them unusable for 4-channel reproduction on equipment having an inbuilt CD-4 decoder. Unless you are particularly interested in the music available on CD-4 discs and intend changing to full CD-4 operation in the near future, there seems little point in buying them.

**PLAYMASTER No 1:** Early in the sixties I put together a stereo radiogram using a Dual automatic turntable and a Playmaster amplifier and separate tuner. For the latter two units I used assembled items. As the turntable had to be replaced I have invested in a Pioneer PL-12R stereo unit. The amplifier and tuner are operating very well and I see no reason to replace them at this juncture.

My problem, as I am not a radio or electronics expert, is how to connect the turntable to my amplifier so that I can get some stereo music. Beyond supplying you with the enclosed sketch I am unable to identify the Playmaster amplifier. I have tried as many combinations of connecting the amplifier as I can think of but to no avail. Your advice would be appreciated. Is the PL-12E compatible with this Playmaster amplifier? (J. D., Strathfield, NSW).

● Your last question is the crux of the matter, J.D., and the answer is no. From your sketch, it seems very likely that your amplifier is a version of the Unit Playmaster No. 1 published in April, 1960. This amplifier was intended for use with cartridges and does not have anywhere near enough gain for your new turntable which uses a magnetic cartridge. If you wish to continue to use your old amplifier you will need to build or buy a suitable preamplifier. The "Low Noise Preamplifier" published in September, 1971 (File 1/PRE/26) is suitable and quite economical.

**SSTV MONITOR:** Today I picked up a copy of the October 1974 issue of EA and noticed in the Information Centre a letter from G.G. of Lake Heights, NSW concerning SSTV.

I am a member of the British Amateur Television Club and interested in SSTV. The book recommended to me covering this subject is the 1973 publication by Don Miller W9TNP and Ralph Taggart WB8DQT called "Slow Scan Television Handbook". It contains 248 pages and covers all facets of SSTV. I have one on order so cannot at the moment comment on it.

I hope this will be of interest to you and "G.G.". (B. G. G., Napier N.Z.).

● Thank you for your information, B.G.G., which we are sure will be of much interest to any of our readers interested in SSTV.

**CASSETTE DECK:** I have had some problems arising from the Playmaster 144 Cassette Deck (August and October 1974, File 1/RA/30,31).

Firstly, on playback when I advanced both the level controls to about halfway (trying to get meter indication on playback) the meters and the LEDs go into oscillation, accompanied by a type of buzz from the loudspeakers. The deck input and output are connected directly to the tape socket of a Playmaster

136. Could you please explain why it is unstable as I cannot see any sort of feedback circuit?

Also the two power supply capacitors seemed to be injecting noise. I changed capacitors and the only thing that changed was the tone. After a bit of advice from a friend and two 1uF capacitors, the noise was gone. Could you tell me the reason for this?

On page 39 of the October '74 the drawing of microphone sockets is wrong, unless your sockets are different from mine (which I doubt). As drawn, it shorted the microphone to earth.

● We will deal with your last query first as it has a bearing on your other queries. The microphone sockets must be the shorting type—they short the microphone input when not in use. If you use non-shortening sockets there will be a strong tendency for the recording amplifier to be unstable when used with high level sources, and this will be apparent by the meter and LED behaviour you describe.

The circuit will also be more sensitive to power supply ripple. You obtained a reduction in power supply noise because the 1uF capacitors you added are more efficient in filtering high-frequency components of the rectifier ripple.

**PRINTED BOARDS:** I would like to make a suggestion for a future article in your magazine. My suggestion is an article on how to design printed circuit boards—in particular boards for devices that contain 2 or more ICs. Although I have designed a couple of boards, they have left much to be desired in terms of compactness and neatness. (G.M., Roma, Qld.)

● Unfortunately, G.M., we are uncertain as to whether you are concerned with the actual mechanics of the artwork or with the design of the board itself. If you are concerned with the artwork mechanics, there are a number of commercial aids available, such as tapes, to make the job easier. If your query is on board design, we are afraid we are unable to be of much help. There are no hard and fast rules here; it is simply a matter of trial and error and experience.

**6V CDI (November '71, 3/TI/10):** I am about to build another 6V CDI system as published in your November 1971 issue. However on page 77, first column,

If you are unable to complete an "Electronics Australia" project because you missed out on your regular issue, we can usually provide emergency assistance on the following basis:

**PHOTOSTAT COPIES:** \$2 per project, or \$2 per part where a project spreads over multiple issues. Requests can be handled more speedily if projects are positively identified, and if not accompanied by technical queries.

**METALWORK DYELINES:** Available for most projects at \$2 each, showing dimensions, holes, cutouts, etc., but no wiring details.

**PRINTED BOARD PATTERNS:** Dyeline transparencies, actual size but of limited contrast: \$2. Specify positive or negative. We do not sell PC boards.

**REPLIES BY POST:** Limited to advice concerning projects published within the past 2 years. Charge \$2. We cannot provide lengthy answers, undertake special research or discuss design changes.

third paragraph, it says 260 turns for the secondary winding of the inverter and yet in the second paragraph it says 230 turns. It also has 230 turns on the circuit. Which one is correct? Have there been any changes or mods to the circuit? (A. B., Ross-moyne, WA).

● The correct number of turns is as indicated on the circuit diagram, 230 turns. The only modification we would suggest is to omit the .001uF capacitor connected directly across the output of the converter. This was intended to dampen the spike from the transistors but in practice it seems to have little effect.

**PHILIPS 60SR PRINTER:** Would the Philips 60SR mosaic printer be suitable for reception of RTTY signals? I am sure that other SWLs would be interested in using it for this purpose, if you could describe it as a project. Incidentally you didn't mention the price of the printer in your article on connecting it to the EA microcomputer. Finally, what is a "panoramic adapter"? (G.P., Bunbury, W.A.)

● Because of its narrow paper format, its use of ASCII encoding and "line at a time" operation, the 60SR printer is not directly suitable for teleprinting work. However, it may be possible to adapt it for such use, and we intend looking into this shortly. As the printer costs around \$500, it may not be as attractive to SWLs as you think, however. A panoramic adapter is a piece of equipment which connects to a communications receiver, and by means of swept-frequency techniques displays the amplitude of all incoming signals in the vicinity of the signal actually tuned. The display is usually on a cathode-ray tube, with frequency corresponding to the horizontal axis and signal amplitude the vertical axis. The vertical centreline is usually arranged to correspond to the signal frequency being received, so that the display shows any signal for say 200kHz either side.

**CASSETTE DECK:** I am now building the Playmaster stereo cassette deck and after studying the frequency response given (80Hz to 9kHz), I was wondering if it could be improved by the crossover technique as used for loudspeaker systems.

Perhaps an extra stage of amplification could come in at frequencies below 100Hz and this would not contain noise because it would cut out above 100Hz. For frequencies above 9kHz another extra stage would be required using some other method of cancelling noise. The above suggestions are only tentative at present but maybe some of your readers or staff could examine the possibilities. (R.B., Mount Claremont, WA).

**BACK NUMBERS:** Only as available. Within last 6 months, face value. 7-12 months, add 5c surcharge; 13 months or older, add 10c surcharge. Post and packing for 60c per issue extra.

**OTHER QUERIES:** Technical queries outside the scope of "Replies by Post" may be submitted without fee, for reply in the magazine, at the discretion of the Editor.

**COMMERCIAL, SURPLUS EQUIPMENT:** No information can be supplied.


**COMPONENTS:** We do not deal in electronic components. Prices, specifications, etc., should be sought from advertisers or agents.

**REMITTANCES:** Must be negotiable in Australia and made payable to "Electronics Australia". Where the exact charge may be in doubt, we recommend submitting an open cheque endorsed with a suitable limitation.

**ADDRESS:** All requests to the Assistant Editor, "Electronics Australia", Box 163, Beaconsfield, 2014.



## For fine detail work — a hands free magnifier

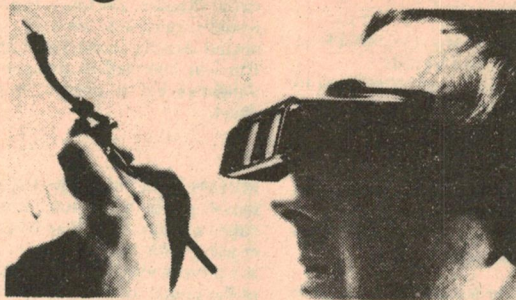

The **Magna-Sighter** is a precision 3-D binocular magnifier that leaves your hands completely free for work. It has hundreds of applications, and is invaluable for scientists, technicians, craftsmen, toolmakers, hobbyists, etc. Slips easily over the head—over glasses, too. Proved and used by many U.S. universities, space research bureaux, government departments and major industrial organisations. Available in 3 different magnifications. Price \$18.00

STC 721

## MAGNA-SIGHTER

For further information send this coupon today:

**STOTT TECHNICAL SERVICES** MEA1075  
(Division of Stott's  
Technical Correspondence College Pty. Ltd.)  
159 Flinders Lane, Melbourne, Vic., 3000


Please send me full information on the 3-D Magna-Sighter.  
I understand that no Sales Representative will call.

Name.....

Address.....

Postcode.....

## THE AUDITEC FM TUNER

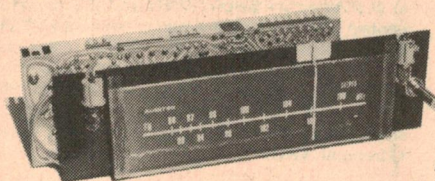

**AUDITEC  
MODULES  
ARE  
AVAILABLE  
FROM:**

ALAN OLIVER ELECTRONICS PTY LTD  
188 Pacific Hwy, St Leonards, NSW.  
Phone 43 5305

DELSOUND PTY LTD  
35 Logan Rd, Woolloongabba, Qld.  
Phone 91 7048

BUNDABERG HI-FI  
244 George St, Bundaberg, Qld.  
Phone 71 3176

CUSTOM AMPLIFIERS  
64 Talbragar St, Dubbo, NSW.  
Phone 82 3793

HI-FI GALLERY  
186 Bridge St, Tamworth, NSW.  
Phone 65 7788

**AND FROM**  
**AUDITEC AUSTRALIA**  
PO Box 228, Hornsby, NSW 2077.  
Phone 47 4166.

PLEASE SEND DETAILS OF THE 030 FM  
TUNER, AND OTHER MODULES TO:

NAME.....

ADDRESS.....

P CODE.....

EA9. 75

### ALL THIS

- Mounts easily against front panel
- Stereo/mono switching facility
- RF sensitivity control
- Low distortion (0.2% typ.)
- Wide response (—3dB, 15Hz —15kHz)
- High pilot tone suppression (43dB)
- High o/p (1 volt)
- Tuning range 88-108MHz
- Interstation muting, with control
- Stereo indicator lamp on dial (LED)
- Edge-lit dial scale
- Tuning meter output
- High stereo separation (45dB at 1kHz)
- Varicap diode tuning
- DC supply 30 to 50 volts
- Fully Australian designed & manufactured

For only \$69.95 (recommended  
retail price) + 27½% sales tax

## INFORMATION CENTRE

• Your idea of improving cassette frequency response might be revolutionary were it not for the fact that only one tape head is used for record and replay, whereas loudspeaker systems generally use more than one loudspeaker to cover the spectrum. It is possible that a noise reduction system using dynamic filtering could be used to extend the useful bandwidth, however, and we plan to look into this shortly. Thanks for the comments.

**BIONICS:** For some time now, my colleagues and I have been interested in the fascinating hybrid science of bionics, the design and construction of automata based on biological examples. Unfortunately, source material on this new subject is very difficult to obtain, especially practical circuits of electronic animals. When material of this sort is available it usually comes from the U.K. in such magazines as Practical Electronics and Practical Wireless.

As Australia's foremost magazine on the subject of electronics, we were wondering if you would consider writing an article, or series of articles on bionics. We are sure that there would be many other interested readers, besides ourselves. (G. Mann, 9 Creekview Close, Rossmoyne WA 6155).

• Although the subject of bionics is relatively unknown to us, we have had correspondence from some readers in your home state (Information centre, May 1975). For this reason, we have taken the liberty of printing your full name and address, so that interested readers will be able to contact you and your colleagues directly. As this is a fairly specialised subject, we have no plans at the present time to present any articles on bionics, but will keep the idea in mind.

**TRAIN CONTROLLER:** I have built and used the SCRP-PUT train controller described in "Electronics Australia" April 1971 (File 2/MC/9) with great success

## "INNERBOND" (Regd.)

## BONDED ACETATE FIBRES

FOR PACKING-IN  
SPEAKER ENCLOSURES

A new resilient Bonded Wadding made from ultra fine Cellulose Acetate Fibres that gives high efficiency for sound absorption. "INNERBOND" is light, clean, dust-free and easy to handle. Because all the fibres are bonded "INNERBOND" will hang as a "curtain" and will not fracture or break down due to vibration. "INNERBOND" is odourless, highly resistant to attack by bacteria or fungus and is vermin repellent. "INNERBOND" at 16oz sq. yd. has a normal thickness of 1" and at this density is recommended as a packing in speaker enclosures for sound absorption.

If unobtainable

For 1 sq. yd. as above send \$2.00  
For 2 sq. yds. as above send \$3.75  
For 4 sq. yds. as above send \$6.50

+ POSTAGE AS APPLICABLE

## WONDER WOOL

PTY LTD

87 JAMES STREET, LEICHHARDT,  
NSW 2040

Box 548 — GPO, Sydney 2001.  
Phone 56 2780



on HO train circuits but I have not had the same experience with a similar controller built for an "N" gauge system. I have used a Motorola 2N4443 SCR but otherwise the circuit is as specified. Voltages are okay but the train operates slowly and throttle has no effect.

I have come to two possible conclusions as to the cause of my problems; one that the SCR operating voltage is higher than that for the C20D, or "N" gauge trains have a different EMF effect to that for which the circuit is designed. (L. D., Auckland, NZ).

• Our conclusions from your letter (which we have condensed), is that the FET is faulty or the 3.9k resistor has been inadvertently replaced with a low value. The different SCR should cause no problems.

**CASSETTE TAPE:** In the February '75 issue of "Electronics Australia" is a review of the Sony TC177 cassette deck.

To date I have been a reel-to-reel man and presently operate a Revox A77 with which I am very happy. I will shortly be acquiring a Sony TC137 which seems electronically similar to the Sony TC177. This brings me to the point of this letter which is the difficulty, apart from lengthy comparisons, of deciding which brand of cassette tape to use. Leaving aside the complication of Ferrichrome, the point is to choose between chromium dioxide and ferric tape.

## FORUM continued from page 63

Are the stockists themselves beyond criticism? I think not. If they decide privately that a particular project won't take on (and this is part of the judgement they have to exercise) they may not even order the key components until there is a line of customers pounding on the counter. Or they may order conservatively, or advertise prematurely, with much the same result.

If we had another page to spare, we could tell quite a story about situations where we've been caught out, other

Why, for example, did you use TDK ED and BASF tape for the TC177 and not Sony tape? Is there any real difference? The price difference of nearly twice seems to mitigate against chrome, particularly if the ferric is smooth and flat to say 12kHz.

I would appreciate any views or data you have which is relevant to this problem and particularly to the Sony TC137, if you have examined it. (E. B., Wollongong, NSW).

• To answer your first question, the tapes we used for testing the TC177 were those on hand and they can be expected to be very similar to Sony ferric or chromium dioxide. You are right in suggesting that there is little advantage with chromium dioxide in view of the price differential. We have little extra data on the subject which would alter your present view.

## ERRATUM

**PLAYMASTER 146 AM-FM TUNER** (September, 1975, File No. 2/TU/44). Add to the parts list 1 transformer, 240V primary 12.5V 150mA secondary, Ferguson PF2851, A & R 6474, or similar. The 470 ohm decoupling resistor to the second 9187 IF transformer is shown in error as 4.7k on the PC board wiring diagram.

journals have been caught out, suppliers have been mistaken or mislead, or where stockists have misjudged their own market. We might even be able to suggest (in hushed tones) that the Dick Smith organisation is subject to the same human frailties as the rest of us!

But the point is taken and we're willing to make a bargain: We'll do the best we can in the future if suppliers (including Dick Smith) will do the best he (or they) can!

## Q-METER PROJECT continued from page 73

should now be excellent and the output to the Q-meter is thereafter adjusted only by the Output control R1. The process should be repeated when switching to other frequency ranges.

To measure the Q of a coil, connect it to the "L" terminals, switch the voltmeter to "V" and adjust the oscillator output to give 1 volt exactly at the frequency of measurement. Switch the voltmeter to "Q", tune C2 to resonance and read the Q on the voltmeter scale in terms of indicated voltage X100.

A good earth connection will probably be needed and this should be to an Earth terminal on the Q-meter, located near C2 and connected to it by a short copper-braid pigtail.

The effective Q of other components such as fixed capacitors can also be measured and calculated by appropriate formulae, but these are perhaps outside the scope of this article. They can be found discussed in any good general textbook, such as Terman's "Electronic Engineer's Handbook". For such work, standard coils of known high Q and appropriate inductance for the frequency or measurement will be needed

as accessories. They can be constructed without trouble by using ferrite pot cores mounted on suitable plug-in bases and preferably wound with Litz wire.

The oscillator draws a current of around 3.5 mA from the 9-volt battery with the specified transistors. Drain from the 1.5 volt cell is in microamps and negligible. Should output voltage on the highest frequency range be found inadequate for any reason the supply voltage can be increased safely to 12 or 15 volts.

The MOSFETs come equipped with a tiny shorting spring around their leads to protect against accidental gate insulation breakdown, and these are best left in place until all soldering has been completed.

## REFERENCES

- (1) P. J. Baxandall: "The Fundamental Principles of Transistor Circuits. Lecture 4. Transistor Sine-Wave Oscillators". Royal Radar Establishment Journal, No. 45, October 1960.
- (2) J. Luijckx: Letter, "Circuit Magnification Measurements". Electronic Engineering, June 1957, page 298.

# jaycar

PTY. LTD.

## ANNOUNCE THE ARRIVAL OF A BULK SHIPMENT OF DUKE AM/FM/MPX STEREO TUNERS

### Specifications:

FM—88-108MHz

Sensitivity 6uV

S/N ratio better than 50dB

IF Rejection better than 90dB

Stereo separation better than 30dB

Muting and AFC switches

Linear scale dial

Signal strength meter

FM stereo auto mpx.

AM—535-1605kHz


Sensitivity 50dB

IF rejection 45dB

Selectivity 25dB

Ferrite bar antenna

Flywheel tuning



## DUKE A100

RECOMMENDED

RETAIL PRICE \$99

### WHOLESALE ENQUIRIES TO:

John Carr & Co Pty Ltd  
405 Sussex St,  
Sydney.  
Phone 211-5077

### RETAIL ENQUIRIES TO:

Jaycar Pty Ltd  
PO Box K39,  
Haymarket 2000.  
Phone 211 5077.



# Plessey show that great sounds can come from small packages

## The PE800

An addition to the PE series—the PE800 is superbly engineered for enthusiasts who want quality performance without sacrificing too much valuable living space.

The PE800 provides impressive overall response with a high performance low compliance

8-inch driver and two 3-inch curvilinear tweeters.

Cabinets are beautifully finished in hand-rubbed American walnut woodgrain and the easily removable open cell polyurethane foam grille brings good looks as well as acoustic transparency.

PE800's are supplied as matched pairs and carry a five-year guarantee. Also in the series is the PE1000, an acoustically tuned 3-way three speaker system.

	Frequency Response	Power Handling	Dimensions
PE800	45 Hz to 20 kHz	20w RMS 40w Programme	555 mm h 370 mm w 240 mm d
PE1000	40 Hz to 30 kHz	20w RMS 40w Programme	597 mm h 390 mm w 299 mm d



# PLESSEY



Further information is available from the listed outlets or direct from: Plessey Australia Pty. Limited, Components Division, The Boulevard, Richmond, Vic. 3121

Available now from: NSW—Lawrence and Hanson Pty. Ltd., Martin De Launay Pty. Ltd., Dick Smith Wholesale Pty. Ltd., Haberecht's Radio & TV Services. VIC—Lawrence and Hanson Pty. Ltd., Radio Parts Pty. Ltd., Fidelity Hi Fi, McGrath Radio. QLD—The Lawrence and Hanson Electrical Co. (Qld.) Ltd., L. E. Boughen & Co. SA—Gerard & Goodman Pty. Ltd., K. D. Fisher and Co. WA—Atkins Carlyle Ltd., H. J. McQuillan Pty. Ltd. TAS—Quantum, W. & G. Genders Pty. Ltd. CANBERRA—Allied Hi-Fi.

AR72



# Marketplace

## FOR SALE

### FREE OFFER!!! FREE OFFER!!! FREE OFFER!!!

FREE OFFER OF 5 OF BC557 TRANSISTORS WITH EVERY PURCHASE OF \$5 OR MORE, FOR THIS MONTH ONLY!!! TAKE ADVANTAGE OF THIS FREE OFFER NOW! DON'T DELAY! GUARANTEED MONEY BACK IF NOT SATISFIED! ELECTROLYTICS AT UNBEATABLE PRICES. ALL TOP QUALITY PIGTAILS. 2uf/300v—18c, 16uf/300v—25c, 25uf/300v—30c, 32uf/450v—60c, 100uf/200v—70c, 200uf/65v—60c, 1000uf/25v—50c, 2500uf/25v—80c. TRANSISTORS: BC557 (BC177, BC157), BC558 (BC178, BC158), BC559 (BC179, BC159), BC338, AS148, AS149, AS320, AS322, AS205—All only 20c ea. GLASS RECTIFIER IN5059 (EM402) 200v, 1A—10c ea. GERMANIUM DIODE IS188 (OA90)—8c ea. COPPER CLAD BOARD at Incredible Prices 6" x 3"—25c, 12" x 9"—\$1.75. Miniature Tuning gang with inbuilt trimmers—50c. INTEGRATED CIRCUITS AT GENUINELY BARGAIN PRICES—DIGITAL T.T.L. 7400, 7401, 7402, 7410, 7420, 7430, 7440—35c ea., 7404—45c, 7408—50c, 7413—80c, 7473, 7474, 7475—\$1.05 ea., 7441, 7442—\$1.75 ea., 7447—\$2.20. LINEAR OP AMPS 741 (D.I.P.)—85c. AUDIO AMP PA234 1w R.M.S. (incl. Cct Diagram)—95c ea. SUPER BARGAIN PACKS—POLYESTER CAPS: All 10% Tol. in volt. of 160v, 270v, 400v (Mixed)—100 for \$3.50. RESISTORS: Mostly 5%, 10%, 1/2w, 1w (Mixed)—100 for \$1.25. TRANSISTORS, NEW, BRANDED pnp and npn germanium types (Mixed)—10 for \$1.50. ELECTROLYTICS: Top quality Pigtailed incl. low volt. and high volt.—25 for \$1.90. CERAMIC CAPS: Excellent quality low and high volt. types—50 for \$1. TANTALUMS: Miniature types at incredible price of 20 for \$1.90. POTENTIOMETERS: Including dual, single, switch and preset pots—20 for \$2.95. Post and Pack 45c or extra for heavy parcels. MICRONICS, P.O. Box 175 Randwick, N.S.W. 2031.

TELEVISION PICTURE TUBES at low cost. 21"—\$27; 23"—\$27 and \$37; 25"—\$43. Two year guarantee. T.E.L.—Leigh-Tubes Pty Ltd, 137 Belmont Street, Alexandria 2015. Phone 51 2854.

POSITIVE VOLTAGE REGULATORS: 305 up to 40 volts TO-5 \$2.00; 340 T series 5V, 6V, 12V, 15V & 24 volts (specify voltage wanted) TO-220 \$2.25; 376 up to 40 volts mDIP \$1.10. NEGATIVE VOLTAGE REGULATOR: 304 up to —30 volts TO-5 \$1.60. OPERATIONAL AMPLIFIERS: 301 TO-5 or mDIP 60c 307 TO-5 or mDIP 90c; 709 to TO-5 or DIP 75c; 741 TO-5 or mDIP 80c; 747 (dual 741) TO-5 or DIP \$2.45; 748 (freq. adj.) mDIP \$1.25; 3900 QUAD DIP 80c. VOLTAGE FOLLOWER: 302 TO-5 \$1.10. DIGITAL CLOCK CHIPS: MM5311 28 pin BCD 4 digit mux \$8.95; MM5312 24 pin 1 pps BCD 4 digit mux \$7.95; MM5314 24 pin 6 digit mux \$8.95; MM5313 28 pin 1 pps BCD 6 digit mux \$8.95; MM5316 40 pin alarm 6 digit \$9.95. All parts new & guaranteed; Data sheets supplied upon request with order. WORLDWIDE ELECTRONICS, PO Box 308, HORNSBY, NSW 2077.

40 + 40 WATTS RMS at 1 KHz into 8 ohms is the output of the new PIONEER SA 7300. Sophisticated electronic protection circuitry is another feature. Selling this month only at \$185 (usually \$199). Postage Qld. \$2.00, elsewhere \$5.00. Alternatively, a stamped addressed envelope will bring you our new mail order catalogue of top quality high fidelity equipment. FIDELITY SERVICE, 19 Borman St, Slacks Creek, Qld. 4114.

12" SANYO B & W TV, UHF Frequency, \$70 O.N.O. Telephone (02) 932000, Mr Hardy.

## REPAIRS

to Japanese radios, car radios, cassettes and 8 track recorders. Send by mail or call in.

**PETER G BROUGHTON**  
99 SUSSEX ST SYDNEY. 2000  
(Near King St) Ph. 29 3845.

RESISTORS AND CAPACITORS: Packs of 255 first quality Philips 1/4 watt 5% resistors \$5.50 per pack. Choice of either STANDARD PACK containing 5 each of standard values from 10 ohm through 1 meg ohm, or COMPUTER PACK which contains a proportioned selection of resistors. If two or more packs are ordered, the price drops to just \$5.00 per pack. Individual standard pack resistors (10 ohm—1 meg ohm) may be ordered at a price of 2.5c per resistor. (1, 1.2, 1.5, 1.8, 2.2, 3.3, 4.7, 5.6, 6.8, 8.2, are the decades available) CERAMIC CAPACITOR PACK consists of 80, 50 volt miniature plate ceramic capacitors. 5 each of the following values: 10, 25, 47, 68, 120, 270, 470, and 680 pf and .001, .0022, .0033, .0047, .01, .02, .047 and 1 mf. The price is \$5.50 per pack, or \$5.25 if 2 or more packs are ordered. POLYESTER CAPACITOR PACK consists of 55, 100 volt polyester capacitors. 5 each of the following values: .001, .0022, .0033, .0047, .01, .022, .033, .047, .068, .1 and .22 mf. Price is \$5.25 per pack, or \$5.00 if two or more packs are ordered. Individual capacitor prices are: CERAMIC 10, 25, 47, 68, 120, 270, 470 and 680 pf and .001 mf, 5c each, .0022, .0033, .0047, .01, .02, .047 mf are 8c each, and .1 mf are 9c each. POLYESTER .001, .0022, .0033, .0047, and .01 are 7c each. .022, .033, .047, .068 mf are 10c each, .1 and .22 mf are 13c each. Postage is included in the price of all orders of \$5.00 or more. Orders of less than \$5.00 add 40c for postage and handling. Enclose cheque or money order with each order to: M & R ELECTRONICS, 575 Sydney Road, Seaforth, NSW 2092.

BUILDING TRANSMISSION LINE SPEAKER ENCLOSURES? Raw long-haired lamb's wool for Bailey or similar enclosures—see Wireless World May 1972 and Electronics Australia July 1972 and May 1975. 6 kilos (sufficient for two enclosures) \$14 plus freight collect. Write enclosing remittance to P. Mills, PO Box 120, Mudgee, NSW 2850.

WE SELL Construction Plans. TELEVISION 3D converter, \$25 camera, Kinescoping recorder, VTR Colour Converter. HOBBYST: Electronic Microscope, 96-hour music system, voice typewriter, Morse Code to typewriter copier, solid state Tele-type. TELEPHONE: Answering machine, pushbutton dialler, phonevision, Autodialler, Car Telephone Extension, legal connector. BROADCAST: Special effects Gen., Time Base Corrector. Plans \$7.50, air shipped from our USA research labs. COURSES: Telephone Engineering \$52. Security Electronics \$33. Investigative Electronics \$29.50. Super Hobby Catalog plus 1 year's Electronic Newsletter, air mailed \$1.00. Don Britton Enterprises, Suite 28, 280 Pitt St., Sydney, Australia.

INTEGRATED CIRCUIT DISCOUNTS. 741c OP AMP mDIP 60c ea. —555 TIMER mDIP 89c ea. — 556 DUAL TIMER DIP \$1.46 ea. —LM3900 QUAD AMP DIP \$1.00 ea. —Add 30c per order for post and packing. Minimum order \$5.00. BYMAIL PRODUCT SERVICES, PO BOX 193, RINGWOOD 3134.

PMG RELAYS: 4—\$2.20—\$8, 250 100k res, 2% 1W HS, \$3. PMG counters 50c, 100pF—47pF 5kV disc caps. 10—\$2.50. PMG uniselectors 5 bank 25 position \$3, P trans. eq. ADZ11 on finned HS \$2. Add post. 1 Tolmie Street, Toowoomba Qld.

CASSETTES: Therapeutic, Motivational, Low Cost. Many topics, inc. lose weight, stop smoking, stammering, increase confidence, succeed, etc. Free extensive list. HOME EDUCATION, 18E Polaris Drive, East Doncaster, Vic 3109.

ENGLISH—TOP QUALITY—40W RMS mono transistor ampl. boards. Sens. 200mV—resp. 10Hz to 60kHz—1dB. Load 4 ohms—PS 45V. Bridged op. 80W RMS—details supplied. \$18.80 ea. incl. post. Limited quantity. Graham Sinclair Custom Electronics, c/o Post Office, Murarrie, 4172.

CLEARANCE ICs: 7400, 7404, 7405, 40c; 7474, 7490, 7491, NE555 \$1.00; EM404 20c; unmarked UA709 30c; Min 12V 4 c/o Relay with Base \$1.00; 40V Relay 4 c/o \$1.00; 30 Pin Plug & Socket 50c; Computer Boards 50c. P & P 50c. Birnlee Trading, PO Langwarrin, Vic 3910.

COMMUNICATIONS RECEIVER: Lafayette HA600A; gen. coverage, 3 months old, used little, exc. condition, c/w instruction booklet. \$130. 88 McIntyre Dve, Altona, 3018. Ph. 398 2780.

## LANTHUR ELECTRONICS

69 Buchanan Avenue, North Balwyn, Vic.  
3104. P.O. Box 162. Ph. 85 4061

### ELECTRIC MOTOR SPEED CONTROLLER BASIC KITS

For controlling speed down to stop of any ac/dc brush type motors, especially hand tools of all kinds. Consists of triac, resistor, diodes, potentiometer, knob, 3 pin base & plug and circuit.

5 amp. size (1200 watt)	\$8.50
10 amp. size (2400 watt)	\$9.50
Price includes postage.	

### LAMP DIMMER BASIC KITS

For controlling incandescent lamps from full to out at up to 1200 watts. Consists of triac, diac, capacitors, resistors, potentiometer, knob, ferrite rod, enamel wire & circuit.

Price including postage \$6.95

### PLASTIC CABINETS

Suitable to contain above speed controller or lamp dimmer. Approx. size—117 x 62 x 35 mm.

Price including postage \$1.45

### BATTERY SAVER BASIC KIT

Replaces batteries in radios, tape recorders, record players, toys, instruments etc. Consists of tapped transformer, bridge rectifier, filter capacitor & circuit. Will supply dc voltages from 6 to 15.

One amp. size	\$8.75 includes postage.
Two amp. size	\$14.25 plus postage \$1.00

### BATTERY CHARGER BASIC KIT

For charging wet batteries 12 volt at 2 amps. Consists of transformer, bridge rectifier, ballast resistor & circuit.

\$9.25 Plus postage \$1.00

### PANEL METERS


Moving iron ac/dc type. 0-10 amp. Clear plastic face approx. 55 x 55 mm. Price including postage \$4.75

### DIODES

High quality miniature glass type.

400 piv. at 1 amp.	Six for \$1.00
	Twenty for \$2.50
Price includes postage.	Fifty for \$6.00

## TIME CLOCKS



SANGAMO \$15 DAY OMIT DEVICE	HORSTMANN \$12 Now with spring reserve	SANGAMO \$12.50 LESS DAY OMIT DEVICE
---------------------------------------	---	--

240V 50 cs 15A Contacts  
Used tested and guaranteed

PACK & POST \$1.50

Vic. & Qld. \$1.60 W.A. \$2.50

**CLOCK DISPOSAL CO.**

P.O. Box 147

LINDFIELD. N.S.W. 2070



## UNITED TRADE SALES PTY LTD

280 LONSDALE STREET,  
MELBOURNE, 3000  
TELEPHONE: 663 3815

### THIS MONTH'S SPECIAL:

**Solid State R.F. Amplifiers** brand new in carton with manuals. These amplifiers are the size of a car radio.

**SPECIFICATIONS:** 4 watts max input, output 25 watts, output impedance 50 ohms. The line up of these units is as follows: All units are modules namely RF Keying Module, Automatic Power attenuator, Input attenuator, A.L.C. Driver Final—all push pull. Low Pass Filters, Directional watt meter, antenna matching network. Frequency range 30MHz to 75MHz 24V D.C. operation.

Size 11 x 7 x 2½". Price only \$24. P/P \$3.

**BARGAIN:** Transistors unmarked mixed \$2.50 per 100 P/P 40c.

QQE06 Ceramic Sockets \$2 each P/P 40c.

Crystal Filters 10.7MHz 30KHz \$5 each P/P 75c.

Ceramic Filters 455 KHz 25c each P/P 15c.

Resistors mixed \$1.50 per 100 P/P 40c.

Capacitors mixed \$1.50 per 100 P/P 40c.

Small A.C. 240 volt motors 6 R.P.M. \$5 each P/P \$1.

## MARKETPLACE — Cont.

**COLOUR TV VOLTAGE TRIPLERS:** Silicon type \$11.50 + 27½% tax. Selenium type \$12.50 + 27½% tax. At Adrian Mitchell's TELEVISION REPLACEMENTS, rear 139 Union Rd, Surrey Hills 3127. Phone (03) 89 1019. Where the TV technicians meet.

**GET IN EARLY FOR CHRISTMAS:** EA handbooks make great gifts at Christmas time. Order now in plenty of time for mailing. See our advert last month, page 60.

## READER SERVICE

**AUSTRALIAN RADIO DX CLUB:** For overseas and long distance shortwave and medium wave reception for DXers and SWLers. Monthly bulletin. Send 30c stamp for membership details to ARDXC, PO Box 227, Box Hill, Vic 3128.

**FOR HIRE** All Test Instruments, free delivery (Sydney Metro Only), free technical advice. Design, repair services also available. Ring HOBBY HIRE any time, any day on (02) 50-4361.

**RADIO TRADESMAN, Ref. No. (J/01), Forests Commission, Stawell**

**SALARY RANGE:** \$6,953—\$7,380.

**DUTIES:** Under direction, to install, service and construct fixed and mobile radio equipment.

**QUALIFICATIONS:** To be a suitably qualified and experienced radio tradesman. A licence to drive a motor car.

**NOTE:** If the successful applicant has appropriate experience in the communications field, he may be eligible for appointment as a Radio Technician (\$7,754—\$8,099).

Applications in writing, quoting reference number (J/01), stating age, qualifications and experience to reach the Secretary, Public Service Board, 1 Treasury Place, Melbourne 3002, by not later than 9.30 a.m. on Wednesday 3 December 1975.

# 4GY

Applications are invited for the position of

## SENIOR TECHNICIAN

with country radio station.

BOCP or equivalent qualifications. Duties include maintaining new SMC automated switcher, near-new AWA transmitter and up-dating studio facilities.

Apply to The Manager,  
Gympie-Noosa Broadcasters Pty Ltd.,  
Box 42, Gympie, Qld. 4570.

## SERVICE MANAGER

For long established provincial appliance/TV store. (Member of Qld. "Betta" group).

**Duties:** Direct day to day service operations—TV, white goods etc—parts inventory control—co-operation with sales division—service assistance when time permits.

**Qualifications:** Wide experience—TV, or elec. trades certificate; staff leadership and training capability; ideally in age range 28-40 years.

Excellent conditions, modern fully equipped workshop, attractive remuneration. Consideration could be given to successful applicant acquiring up to half share in service subsidiary. Apply with brief resume of experience to:

Manager, "Betta Stores"

PO Box 42, Everton Park, Qld. 4053.

# NATIONAL RADIO SUPPLIES

332 PARRAMATTA RD, STANMORE, NSW 2040. PH. 56-7398.

### SERVICE PACK SPECIALS.

### VALUE FOR YOUR MONEY.

<b>CERAMIC CONDENSER PACK</b> all different values 100 for \$2.50	<b>MICA PACK</b> A 50 for \$3.00 B 20 for \$1.80	<b>RESISTOR WIRE WOUND Pack</b> 50 for \$5.00 3 & 5 & 10 watt.	<b>Ex ANODEON POTS</b> with handy sw/backs 10 for \$4.50
<b>STEREO TURNTABLE KIT</b> with pick up arm & motor \$7.90	<b>RESISTOR PACK</b> Mixed 1 watt & ½ watt 100 for \$1.50	<b>POTENTIOMETER PACK</b> 20 for \$2.50	<b>E.H.T. SOCKETS</b> 1B3 and 1S2 10 for \$2.00
<b>DOUBLE POTENTIOMETER Pack</b> 10 for \$4.00	<b>VIBRATORS 6V</b> 5211 A.W.A. \$1.00	<b>POLY PACK The Best</b> 50 for \$2.00	<b>WALKIE TALKIE</b> Sanyo 5 Watt Hand held only \$75.00 each
<b>5BP1 OSCILLOSCOPE TUBE</b> still only \$1.50	<b>SELENIUM RECTIFIER 2.5 amp</b> SPECIAL at \$1.50	<b>TRANSISTOR SPECIAL</b> MJ3055-2N3055 \$1.15	<b>3" IMA METERS</b> was \$7.90 now \$5.95
<b>8 ELEMENT AERIALS</b> 406 or 215 \$15.00 by train	<b>PORTABLE PYE GRAM</b> cabinet only \$3.50	<b>TRANSISTOR SPECIAL</b> BC147, BC148, BC149 10 for \$1.20	<b>SPECIAL T.V. TX.</b> 240v to 115v 6.3v 4 amp. \$2.00
<b>TRANSISTOR SPECIAL</b> 2SC463A equivalent BU105 \$2.60	<b>T.V. BALUN</b> 300 ohms to 75 ohms 80c	<b>B.S.R. AUTO CHANGERS</b> Ceramic cartridge \$41.00 G11204 Magnetic cartridge \$49.00 G11302	
<b>VALVE SPECIAL</b> 6CM5 \$1.90    6DX8 \$1.40    6X9 \$1.55 6BL8 \$1.30    6BU8 \$1.68    6U9 \$1.55 6BM8 \$1.30    6GV8 \$1.40    6AL3 \$1.40 6Y9 \$1.70    6GW8 \$1.40    6SN7 \$1.00 6JW8 \$1.38    1S2 \$1.40		<b>SPECIALS ON SPEAKERS</b> Magnavox speakers 6WR \$10.75 8WR \$11.85 10WR \$13.85 5FX 5" tweeter Rola 15 ohms \$3.00 6" MSP 3.5 ohms \$3.50 6 by 9 3.5 ohms \$4.20	
<b>Please add 15% to all parcels for postage and packing, thank you. For all heavy parcels please state nearest rail station.</b>			



# LAFAYETTE

## 27MHz TWO-WAY RADIO

FOR INDUSTRY, FARM,  
BOATS, SPORTS, ETC.




### MICRO 66

Only 1-15/16" H x 5-3/16" W x 6-13/16" D.

5 WATTS

6 CHANNELS \$139.50 (Crystals Extra)

The latest in the famous LAFAYETTE Micro series the MICRO 66 embodies the versatility, reliability and performance which have made LAFAYETTE famous throughout the world in 27MHz communications. With an extra sensitive receiver of better than 1uV for 10db S-to-N ratio, "Range-Boost" modulation circuitry, a built-in speaker plus push-button selected external speaker-microphone (supplied), the MICRO 66 is ideal for Boats or Base Station operation. Operates from 12V DC or 240V AC with optional Base Station Power Supply.



5 WATTS

12 CHANNELS

### DYNA-COM 12A

\$139.50 (Crystals Extra)

A powerful 5-Watts input power in a hand-held transceiver! Excellent sensitivity and selectivity. Ruggedly designed for extra reliable performance. This high-power walkie-talkie operates from internal batteries (rechargeable Ni-cad batteries available) or an external 12V source.



1 WATT 3 CHANNELS

### Model HA-310

\$73.50 (Incl. 27.240MHz)

1,000's of LAFAYETTE HA-310 walkie-talkies in use in Australia, 100,000's throughout the world attest to their superior qualities. A professionally designed, sturdily constructed, commercial quality unit for top performance and long term reliability. Rechargeable Ni-cad batteries are available to suit.

All above transceivers are P.M.G.  
Type Approved (Licence Required).

A LARGE RANGE OF ACCESSORIES IS AVAILABLE, ANTENNAS, CRYSTALS, CONNECTORS, ETC. PLEASE ENQUIRE FOR DETAILS.


## LAFAYETTE ELECTRONICS

div. of Electron Tube Distributors P/L  
94 ST. KILDA RD. ST. KILDA  
VIC., 3182 Phone 94 6036

# CELESTRON

SCHMIDT - CASSEGRAIN  
MULTI-PURPOSE TELESCOPES

ASTRONOMY - PHOTOGRAPHY - NATURE STUDY

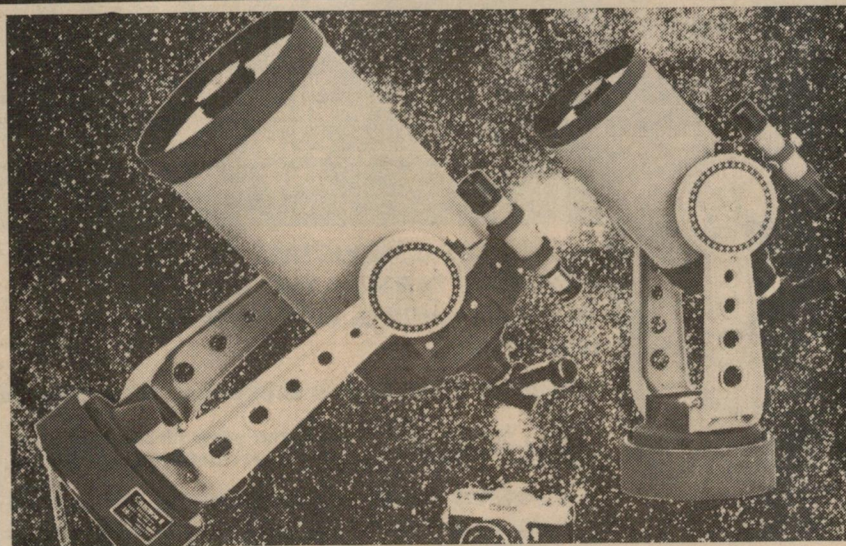

Visit our modern and fascinating showrooms.

See the greatest range of telescopes and astronomical equipment anywhere in the world—or send 40c for informative catalogue.

Telescopes for all purposes Build-it-yourself kits Binoculars Microscopes Books, charts, atlases Weather equipment.

## ASTRO OPTICAL SUPPLIES PTY. LTD.

SYDNEY 11 Clarke Street,  
Crows Nest. Phone 43 4360

MELBOURNE Mid City Arcade,  
200 Bourke Street. Phone 663 2761

# WILLIS TRADING CO.

PERTH G.P.O. Box No. X2217, W.A. 6001

429 MURRAY ST.,  
PERTH, W.A.  
21 7609 21 7600

6 DIGIT  
CLOCK KIT  
Complete  
with Cabinet  
\$32.95



Also Calendar Clock  
with alarm \$45.00.



### CUBE SPEAKER

4" 8 Ohm 4 Watt  
50-20 kHz  
In Modern Colours  
\$7.65



ELECTRONIC TOOL KIT.  
\$19.75



AM-BC Short Wave  
CAR RADIO  
Cassette  
\$95.00



VHF  
CONVERTER  
TUNER  
110-136 MHz  
couples to  
broadcast receiver.  
\$14.95  
P & P 55c



### BARLOW-WADLEY RECEIVERS

Model XCR-30 Mk II 500kHz to  
31 MHz continuous coverage,  
crystal controlled reception of  
AM / USB / LSB / CW. Price  
Now \$279.00 + P & P.

### NEW MODELS



7 TRANSISTOR RADIO KIT  
Silicon transistors, complete  
with instruction book, carrying  
case and earphones.  
Special Price \$5.95.

10 TRANSISTOR RADIO KIT  
With RF stage \$10.95.  
Post & Pack, 75c.




FM Monitor Receiver 2 Channel  
available for either Low or High  
Band. \$110.00 plus Crystals.

### SCORPIO IGNITION SYSTEM KIT

The Scorpio CD Ignition ensures  
better performance with up to  
50,000 miles between tune-  
ups. "Scorpio" Car Ignition Kit,  
\$27.50



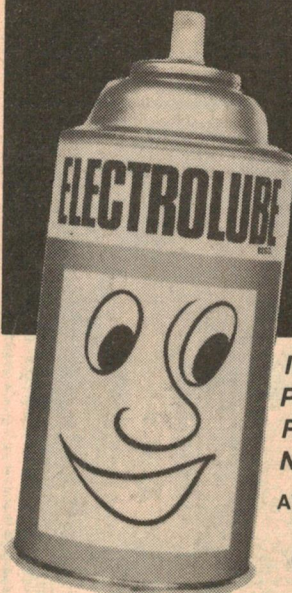

# ELECTROLUBE

REGD.

## 2A-X

THE UNIVERSAL  
MECHANICAL AND  
ELECTRICAL  
CONTACT CLEANER  
AND LUBRICANT

**INCREASES CONDUCTIVITY, LOOSENS AND  
PREVENTS TARNISH AND CORROSION,  
REDUCES ARCING, REPELS MOISTURE,  
NON-TOXIC**

AVAILABLE FROM LEADING ELECTRICAL WHOLESALERS.



Information on 2 A-X and other Electrolube  
Products is available from Australian Agents:

**RICHARD FOOT (AUSTRALIA) PTY. LTD**

63 HUME STREET, CROWS NEST, N.S.W. 2065. Telephone: 43-0326.

R.F.1547C

# Instrumentation and Measurement

Following the success of the first residential course on An  
Integrated Approach to Measurement, Instrumentation and Control, held  
last year, a revised and improved second course will be held at the  
University of New England, Armidale, N.S.W., from 29th November  
to 5th December, 1975.

This course has been designed for engineers, technicians, research  
workers, management executives — in fact, all engaged in the design,  
manufacture, operation or distribution of modern instrumentation.  
It covers the bases of measurement, design of instruments, classes of  
measurement sensors, data processing, information retrieval and  
promotion of hardware.

For brochure detailing the course, please write to or phone:  
Department of Continuing Education,  
UNIVERSITY OF NEW ENGLAND,  
Armidale, N.S.W. 2351. (Phone 72 2911 ext. 2123)

10251

## SUBSCRIPTION SERVICE



**ELECTRONICS  
Australia**

### Subscription Rates

\$A12.00 per year  
within Australia.  
\$A15.00 per year  
elsewhere.

Make sure you receive every copy of the magazine by ordering it from your  
newsagent or the publisher. For publisher subscriptions post this coupon,  
with your remittance, to Subscription Dept, PO Box M204, Sydney Mail Exchange,  
2012. Subscription will start with first available issue.

Name .....

Address .....

Postcode ..... Enclosed is.....for..... years

## Advertising Index

ACE Radio	98
Allen Organs	13
Amalgamated Wireless (A'sia) Ltd	90
Amateur Astronomers Supply Co	111
Anderson Digital Electronics	47
Arlunya Pty Ltd	30
Atlas Electronics	82,83
Auditec Australia	106
Australian Consumers Assn.	33
Australian Time Equipment Pty Ltd	100
Betta Stores	110
Bright Star Crystals Pty Ltd	100
British Merchandising Pty Ltd	7,87
Peter G. Broughton	109
BWD Electronics Pty Ltd	64
John Carr Pty Ltd	107
L. E. Chapman	96,97
Maurice Chapman Pty Ltd	5
Classic Radio Service	94
Clock Disposal Co	109
Colrose Electronics	29
Deitch Bros.	104
Dick Smith Electronics Pty Ltd	53 to 60
Dynetics	50
EA Handbooks	91
E. D. & E. (Sales) Pty Ltd	78
Edge Electrix	103
Electronic Agencies	68,69
Elliot Machine Tools Pty Ltd	98
Fairchild Australia Pty Ltd	24
Ferguson Transformers Pty Ltd	75
Richard Foot (Aust) Pty Ltd	112
4GY	110
General Electronic Services Pty Ltd	90
George Hawthorn Electronics	85
Haco Distributing Agencies Pty Ltd	OBC
Ham Radio Suppliers	95
International Correspondence School	20
International Dynamics (Agencies) Pty Ltd	IBC
IRH Natronics Pty Ltd	4
Jacoby, Mitchell & Co Pty Ltd	44
Lafayette Electronics	111
Lanthur Electronics	109
Marconi School of Wireless	40
McGills Newsagency Pty Ltd	91
National Radio Supplies	110
Non-Linear Systems	36
Philips Industries Ltd	2,28,66,88
Plessey Australia Pty Ltd	14,108
Pre-pak Electronics	76
Radio Despatch Service	79
Ralmar Agencies	6
RCS Radio Pty Ltd	81
Peter Shalley Electronics Pty Ltd	18
Sicura Watches	11
Sony Kemtron Pty Ltd	IFC,16
Stott's Tech Correspondence College	75
Stott's Magna Sighter	106
Tektronics Pty Ltd	48
United Trade Sales Pty Ltd	110
University of New England	112
Victorian Forests Commission	110
Willis Trading Co	111
Wireless Institution of Australia (NSW)	101
Wonder Wool Pty Ltd	106



# LUXMAN

## M-6000

THE STEREO  
AMPLIFIER FOR  
YOU WHEN  
YOU'VE WON THE  
OPERA HOUSE  
LOTTERY.

With a guaranteed minimum power output of 300 watts per channel . . . a *continuous rating of 600 watts RMS* . . . into 8 ohm speaker systems, and a THD of 0.05% through a frequency response of 20 Hz. to 20,000 Hz., the LUXMAN M-6000 must be regarded as the ultimate stereo amplifier.

It will satisfy the most demanding stereo enthusiast . . . particularly when combined with the total flexibility of the LUXMAN C-1000 Pre-Amplifier Control Centre.

But, naturally, the LUXMAN M-6000 is not inexpensive.

However, all is not lost. In the new LUXMAN series there are wide ranges of power amplifiers, pre-amplifiers, integrated amplifiers, tuners and tuner/amplifiers.

All have been designed with the same painstaking attention to detail — and the same manufacturing enthusiasm and precision — as the LUXMAN flagship, the magnificent M-6000.

Choose the LUXMAN model which suits your stereo budget. Listen to it critically — and make your personal comparisons in terms of both design and performance. *After all, when you choose LUXMAN, you'll be listening to it for a long time to come!*



Distributed in Australia by:

# INTERDYN

INTERNATIONAL DYNAMICS  
(AGENCIES) PTY. LTD.  
23 Elma Rd., North Cheltenham.  
Melbourne, Victoria 3192

Available from:  
A.C.T.: Duratone Hi Fi, Cnr Botany St & Altree Crt, Phillip 2606. Telephone: 82-1388.  
N.S.W.: M & G Hoskins Pty Ltd, 400 Kent St, Sydney 2000. Telephone: 546-1464, 547-1093.  
Q.L.D.: Stereo Supplies, 95 Turbot St, Brisbane 4000. Telephone: 21-3623. S.A.: Challenge Hi Fi Stereo, 96 Pirie St, Adelaide 5000. Telephone: 223-3599. T.A.S.: Audio Wholesalers Pty. Ltd., 9 Wilson St, Burnie 7320. Telephone: 31 4111. V.I.C.: Ence Electronics Pty Ltd, 431 Bridge Rd, Richmond 3121. Telephone: 42-3762. W.A.: Arena Distributors, 282 Hay St, Perth 6000. Telephone: 25-2699.

ID—LA175



# YOU'LL FIND IT QUITE AN EXPERIENCE

For those who are after a total package in Hi-Fi, JVC presents "CREATION 310" Components specially matched so that each and every unit complements one another.

Here are the components necessary for enjoying top notch stereo sound.

The power source is our integrated stereo amplifier JAS310 with a power output of 50 watts RMS. Tuner — JTV310 offers exceptional value in terms of quality FM/AM reception. Speakers — SK33 2 way 2 speaker Hi-Fi system. Cassette Deck — 1655 with tape selector switch and noise suppressor.

The JLA1 belt drive turntable with auto return/auto shut off completes this very impressive package.

"CREATION 310" is a precision marriage of JVC components designed to impress your ears. Your eyes too will be impressed, for an optional table is available to house this system in a neat package.

Ask your JVC dealer for a personal demonstration. You'll find it quite an experience.



VICTOR COMPANY OF JAPAN LIMITED

WT GD71J

For further information please write to — JVC Advisory Service, P.O. Box 49 Kensington, N.S.W. 2033  
Guaranteed and serviced throughout Australia and Pacific Islands by **Hagemeyer (Australasia) B.V.** Branches in all states.



JTV 310  
JAS310